




GYNECOLOGY

INTERDISCIPLINARY APPLICATIONS

2

GYNECOLOGICAL LAPAROSCOPY	
HYSTEROSCOPY	



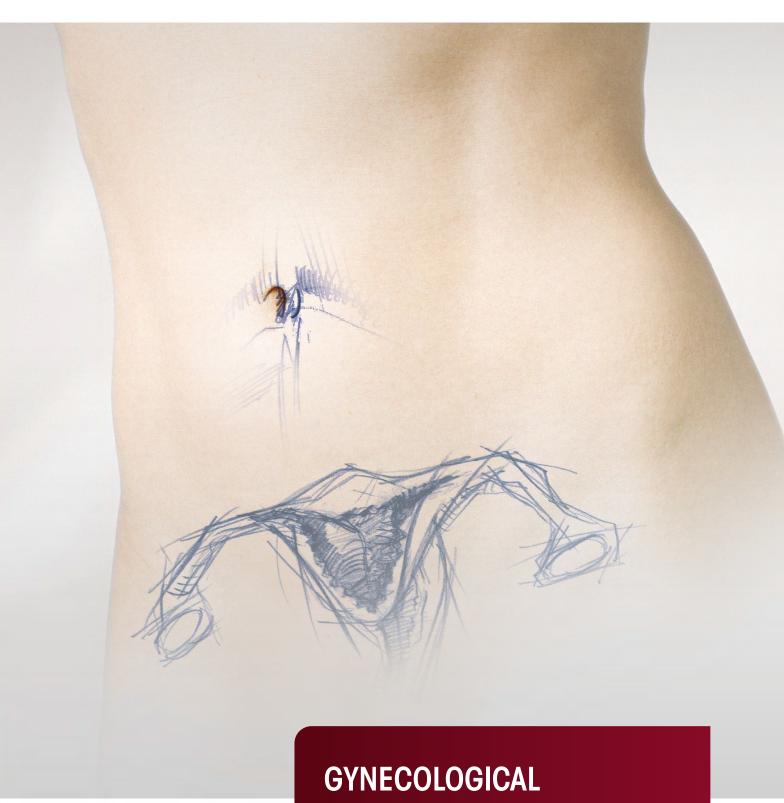

LAPAROSCOPY ____



GYNECOLOGICAL LAPAROSCOPY

BASIC SET	rs
Secu Flx	UTERUS MANIPULATOR
TELESCOF	PES
TROCAR S	SLEEVES/DILATION/EXTRACTION/REDUCING SLEEVES
ERAGONM	IODULAR GRASPING FORCEPS/DISSECTORS/BIOPSY FORCEPS/SCISSORS
BIPOLAR F	FORCEPS
ERAGONB	IPOLAR FORCEPS AND SCISSORS
HF ELECTI	RODES (MONOPOLAR/BIPOLAR)
MULTIFUN	ICTIONAL SUCTION IRRIGATION SYSTEM
TISSUE RE	ETRACTOR
CLIP APPL	.ICATOR
NEEDLE H	IOLDER/KNOT PUSHER/FASCIA CLOSURE
CANNULA	S/SURGICAL PROBES/MYOMA DRILLS
INSUFFLAT	TORS
FLUID COI	NTROL
HF GENER	RATOR
ACCESSO	RIES
TRAINING	MODELS



BASIC SET

FOR ALL LAPAROSCOPIC PROCEDURES

Product	Product no.	Quantity	Catalog / Section
Insufflator 45 EVAC + HEAT bndl	22350312	1	Gynecology / 14
VERES cannula Ø 2.1 mm WL 120 mm	8302.12	1	Gynecology / 4
LAP suction irrigation pump bndl	22160011	1	Gynecology / 15
LED light source ENDOLIGHT LED 2.1 bndl	51630011	1	Imaging / Light sources
Fiber light cable		1	Imaging / Light cables
ENDOCAM Logic 4K	5525	1	Imaging / ENDOCAM
Monitors		1	Imaging / Monitors
Device cart		1	Imaging / Device cart

BASIC SET FOR LAPAROSCOPIC CYST EXSTIRPATION

Product	Product no.	Quantity	Catalog / Section
Telescope 0° Ø 10 mm WL 307 mm	8934.431	1	Gynecology / 3
and/or			
Telescope 30° Ø 10 mm WL 307 mm	8934.432	1	Gynecology / 3
Fiber light cable bndl	806650231	1	Gynecology / 3
Trocar sleeve, slanted, capacity 5.5 mm WL 100 mm	8921.013	2–3	Gynecology / 4
and/or			
Trocar sleeve, straight, capacity 5.5 mm WL 102 mm	8919.351	2–3	Gynecology / 4
Trocar sleeve, slanted, capacity 10 mm WL 100 mm	8923.013	2	Gynecology / 4
Guide rod 5.5 mm TL 500 mm	8923.921	1	Gynecology / 4
Instrument sleeve 10 mm WL 170 mm	8385.50	1	Gynecology / 4
VERES cannula Ø 2.1 mm WL 120 mm	8302.12	1	Gynecology / 4
Multifunctional suction irrigation system			
Suction irrigation tube Ø 5 mm WL 310 mm	8383.911	1	Gynecology / 9
Suction irrigation handle	8385.901	1	Gynecology / 9
Sealing cap	8385.902	1	Gynecology / 9
ERAGONmodular	'		
Atraumatic grasping forceps Ø 5 mm bndl	83932925	1	Gynecology / 5
Atraumatic grasping forceps mono Ø 5 mm bndl	83931817	2	Gynecology / 5
Maryland dissector forceps mono Ø 5 mm bndl	83932817	1	Gynecology / 5
Metzenbaum scissors Ø 5 mm bndl	83930417	1	Gynecology / 5
Grasping forceps Ø 10 mm bndl	83952048	1	Gynecology / 5
Plate-shaped grasping forceps Ø 10 mm bndl	83952347	1	Gynecology / 5
ERAGONbipolar			
Grasping forceps bipo Ø 5.5 mm bndl	839300312	1	Gynecology / 7
Hook electrode mono Ø 5 mm WL 340 mm	8383.423	1	Gynecology / 8
Needle forceps Ø 2.45 mm WL 160 mm	8756.201	1	Gynecology / 12
Sealing cone Ø 12–15 mm	8943.915	1	Gynecology / 12
Monopolar HF cable	8106	1	Gynecology / 17
Bipolar HF cable	8108	1	Gynecology / 17



BASIC SET

FOR LAPAROSCOPIC CYST EXSTIRPATION

Product	Product no.	Quantity	Catalog / Section
Also on request:			
Telescope 0° Ø 5.3 mm WL 303 mm	8935441	1	Gynecology / 3
and/or			
Telescope 30° Ø 5.3 mm WL 303 mm	8935442	1	Gynecology / 3
Trocar sleeve, slanted, capacity 5.5 mm WL 100 mm	8921.013	1	Gynecology / 4
Trocar tip sharp size 5.5 mm WL 169 mm	8921.113	1	Gynecology / 4
ERAGONmodular			
Atraumatic grasping forceps mono Ø 5 mm bndl	83931957	1	Gynecology / 5
Biopsy forceps mono Ø 5 mm bndl	83930937	1	Gynecology / 5
Dissector forceps Ø 10 mm bndl	83952268	1	Gynecology / 5



BASIC SET FOR LAPAROSCOPIC ADNEXECTOMY

Product	Product no.	Quantity	Catalog / Section
Telescope 0° Ø 10 mm WL 307 mm	8934.431	1	Gynecology / 3
and/or			
Telescope 30° Ø 10 mm WL 307 mm	8934.432	1	Gynecology / 3
Fiber light cable bndl	806650231	1	Gynecology / 3
Trocar sleeve, slanted, capacity 10 mm WL 100 mm	8923.013	2	Gynecology / 4
Trocar tip sharp size 10 mm	8923.113	2	Gynecology / 4
and/or			
Trocar sleeve, straight, capacity 5.5 mm WL 102 mm	8919.351	2–3	Gynecology / 4
Trocar tip sharp size 5.5 mm WL 144 mm	8919.3512	2–3	Gynecology / 4
Trocar sleeve, slanted, capacity 5.5 mm WL 100 mm	8921.013	2–3	Gynecology / 4
Trocar tip sharp size 5.5 mm WL 169 mm	8921.113	2–3	Gynecology / 4
Guide rod 5.5 mm TL 500 mm	8923.921	1	Gynecology / 4
Instrument sleeve 10 mm WL 170 mm	8385.50	1	Gynecology / 4
ERAGONmodular			
Grasping forceps mono Ø 5 mm bndl	83932877	1	Gynecology / 5
Atraumatic grasping forceps mono Ø 5 mm bndl	83931817	2	Gynecology / 5
Maryland dissector forceps mono Ø 5 mm bndl	83932817	1	Gynecology / 5
Metzenbaum scissors Ø 5 mm bndl	83930417	1	Gynecology / 5
Grasping and dissector forceps 5 mm	83932827	1	Gynecology / 5
ERAGONbipolar			
Grasping forceps bipo Ø 5.5 mm bndl	839300312	1	Gynecology / 7
Multifunctional suction irrigation system			
Suction irrigation tube Ø 5 mm WL 310 mm	83839.11	1	Gynecology / 9
Suction irrigation handle	8385.901	1	Gynecology / 9
Sealing cap	8385.902	1	Gynecology / 9
VERES cannula Ø 2.1 mm WL 120 mm	8302.12	1	Gynecology / 4
Bipolar HF cable	8108	1	Gynecology / 17
Monopolar HF cable	8106	1	Gynecology / 17



BASIC SET

FOR LAPAROSCOPIC ADNEXECTOMY

Product	Product no.	Quantity	Catalog / Section
Also on request:			
ENDOCAM Logic 4K	5525	1	Imaging / ENDOCAM
ERAGONmodular			
Dissector forceps mono Ø 5 mm bndl	83932897	1	Gynecology / 5
Grasping forceps mono Ø 5 mm bndl	83931837	2	Gynecology / 5
Biopsy forceps mono Ø 5 mm bndl	83930917	1	Gynecology / 5
Maryland dissector forceps Ø 10 mm bndl	83952257	1	Gynecology / 5
Needle holder Ø 5 mm bndl	8393.502	1	Gynecology / 12



BASIS-SET FOR HYSTERECTOMY

Product	Product no.	Quantity	Catalog / Section
Telescope 0° Ø 10 mm WL 307 mm	8934.431	1	Gynecology / 3
and/or			
Telescope 30° Ø 10 mm WL 307 mm	8934.432	1	Gynecology / 3
Fiber light cable bndl	806650231	1	Gynecology / 3
Trocar sleeve, slanted, capacity 10 mm WL 100 mm	8923.013	2	Gynecology / 4
Trocar tip sharp size 10 mm	8923.113	2	Gynecology / 4
and/or			
Trocar sleeve, straight, capacity 5.5 mm WL 102 mm	8919.351	2–3	Gynecology / 4
Trocar tip sharp size 5.5 mm WL 144 mm	8919.3512	2–3	Gynecology / 4
Trocar sleeve, slanted, capacity 5.5 mm WL 100 mm	8921.013	2–3	Gynecology / 4
Trocar tip sharp size 5.5 mm WL 169 mm	8921.113	2–3	Gynecology / 4
Guide rod 5.5 mm TL 500 mm	8923.921	1	Gynecology / 4
Instrument sleeve 10 mm WL 170 mm	8385.50	1	Gynecology / 4
ERAGONmodular			
Grasping forceps mono Ø 5 mm bndl	83932877	1	Gynecology / 5
Atraumatic grasping forceps mono Ø 5 mm bndl	83931817	2	Gynecology / 5
Maryland dissector forceps mono Ø 5 mm bndl	83932817	1	Gynecology / 5
Metzenbaum scissors Ø 5 mm bndl	83930417	1	Gynecology / 5
Grasping and dissector forceps 5 mm	83932827	1	Gynecology / 5
ERAGONbipolar			
Grasping forceps bipo Ø 5.5 mm bndl	839300312	1	Gynecology / 7
Multifunctional suction irrigation system			
Suction irrigation tube Ø 5 mm WL 310 mm	83839.11	1	Gynecology / 9
Suction irrigation handle	8385.901	1	Gynecology / 9
Sealing cap	8385.902	1	Gynecology / 9
VERES cannula Ø 2.1 mm WL 120 mm	8302.12	1	Gynecology / 4
Bipolar HF cable	8108	1	Gynecology / 17
Monopolar HF cable	8106	1	Gynecology / 17

BASIS-SET FOR HYSTERECTOMY

Product	Product no.	Quantity	Catalog / Section
Uterus manipulator			
SecuFIX Uterus manipulator Ø 36 mm	8370701	1	Gynecology / 2
Secu HX Uterus probe Ø 5 mm	8370702	1	Gynecology / 2
Cleaning brush Ø 5 mm TL 700 mm	7970705	1	Gynecology / 2
Cleaning brush Ø 9 mm TL 400 mm	7970409	1	Gynecology / 2
Sealing cap capacity 3.4–5.1 mm	89.02	1	Gynecology / 2
Secutiva Colpotransilluminator vacuum tube (PACK=10 PCS)	41708370	1	Gynecology / 2
Accessories			
Irrigation tube L 0.6 m	163915	1	Gynecology / 2
Fiber light cable bndl	806635231	1	Gynecology / 2
RIWO System Tray	33024	1	Gynecology / 2
Also on request:		·	
ENDOCAM Logic 4K	5525	1	Imaging / ENDOCAM
ERAGONmodular		·	
Dissector forceps mono Ø 5 mm bndl	83932897	1	Gynecology / 5
Grasping forceps mono Ø 5 mm bndl	83931837	2	Gynecology / 5
Biopsy forceps mono Ø 5 mm bndl	83930917	1	Gynecology / 5
Maryland dissector forceps Ø 10 mm bndl	83952257	1	Gynecology / 5
	·		
Clip applicator Ø 10 mm WL 340 mm	8389.911	1	Gynecology / 11
Ethicon® Ligaclips® (PACK= 108 PCS)	8389.915	1	Gynecology / 11
Introduction sleeve 10 mm WL 80 mm	8389.991	1	Gynecology / 11
Needle holder Ø 5 mm bndl	8393.502	1	Gynecology / 12

||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

Secu**Fix** UTERUS MANIPULATOR

SYSTEM WITH COLPOTRANSILLUMINATION AND VACUUM FIXATION




		Product no.
SecuFIX Uterus manipulator Ø 36 mm		8370701
SecuFIX Uterus probe Ø 5 mm	with longitudinal scale	8370702
Cleaning brush Ø 5 mm TL 700 mm		7970705
Cleaning brush Ø 9 mm TL 400 mm		7970409
Sealing cap capacity 3.4–5.1 mm	(PACK = 10 PCS)	89.02
Secu FIX Colpotransilluminator vacuum tube	Set contains: Colpotransilluminator and vacuum tube (with check valve, suction connection,Y connection part for use with a suction instrument on the same suction device, suction clamp), disposable (PACK= 10 PCS, in individual sterile packaging)	41708370

Accessories		Product no.
Irrigation tube L 0.6 m		163915
Fiber light cable bndl	Fiber bundle, Ø 3.5 mm (color marking orange), length 2.3 m	806635231
RIWO System Tray	Container (W x H x D) 500 x 60 x 200 mm with instrument mat Internal dimensions (W x H x D): 500 x 57 x 200 mm, External dimensions (W x H x D): 566 x 77 x 266 mm	33024




MINI FIBER TELESCOPES 2.0 MM

spirit of excellence

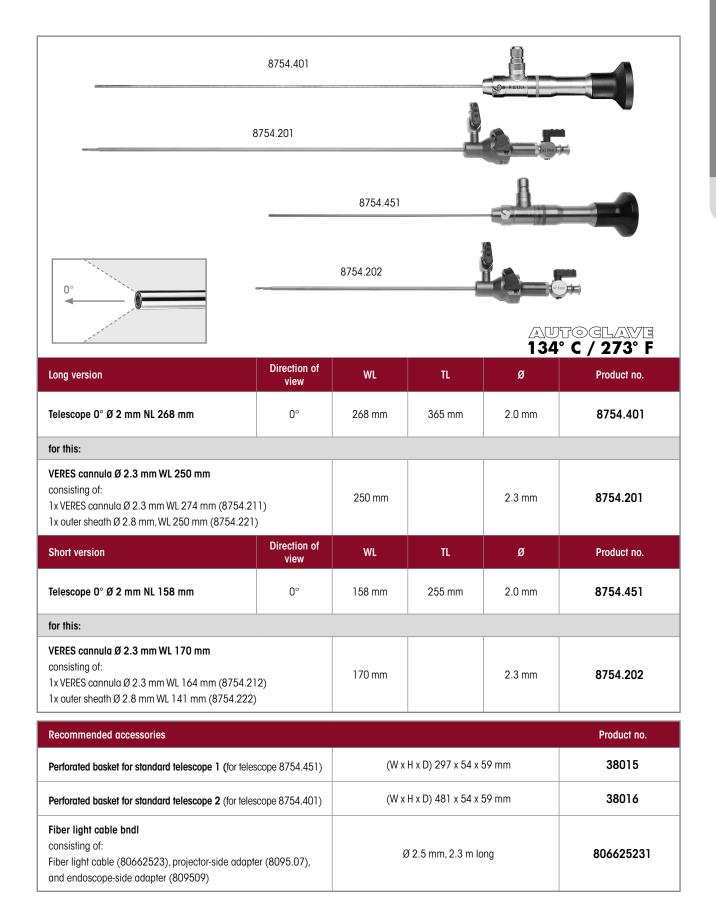


||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

LAPAROSCOPES 3.5 MM

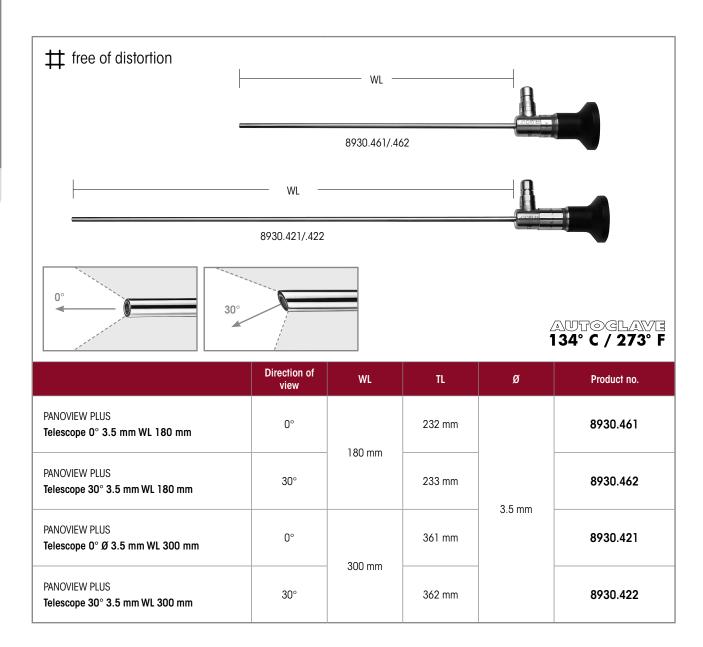

Recommended accessories		Product no.
Perforated basket for standard telescope 1 (for telescope 8930.461/.462)	(W x H x D) 297 x 54 x 59 mm	38015
Perforated basket for standard telescope 2 (for telescope 8930.421/.422)	(W x H x D) 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231


RICHARD

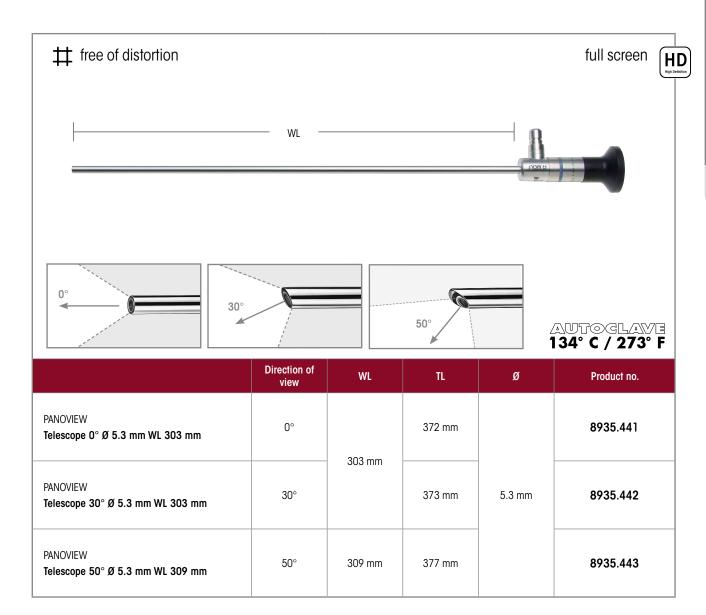

Recommended accessories		Product no.
Perforated basket for standard telescope 2	(W x H x D) 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231



MINI OR LAPAROSCOPE 5.5 MM WITH 3.5 MM WORKING CHANNEL

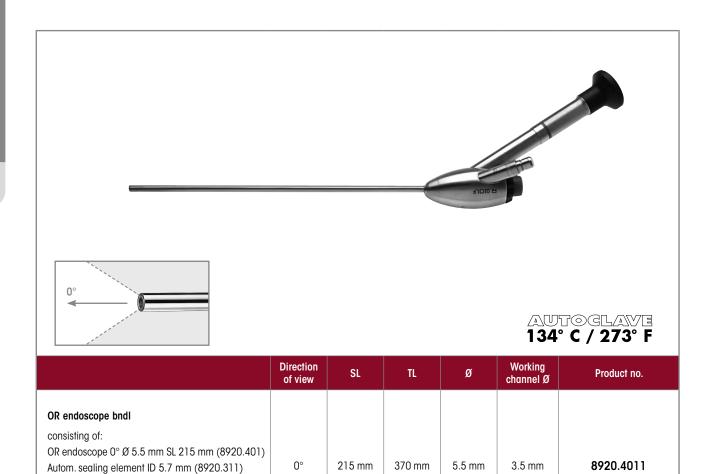

Recommended accessories		Product no.
Trocar sleeve, straight, capacity 5.5 mm WL 62 mm	È	8919.333
Trocar sleeve, straight, capacity 5.5 mm WL 102 mm		8919.353
Perforated basket for telescope Dimensions (W x L x H): 132 x 467 x 75 mm		38008
Fiber light cable bndl consisting of: Fiber light cable (80663523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 3.5 mm, 2.3 m long	806635231

Sealing cap, red-orange (15176.020) Sealing membrane Ø 17 mm (PACK= 10 PCS)

(89.103)






4K UHD 8935461/8935462

89354416/89354426

WL



134° C / 273° F

	Direction of view	WL	Ø	Product no.
PANOVIEW ULTRA Telescope Ø 5.5 mm WL 300 mm	0°	- 300 mm		8935461
PANOVIEW ULTRA Telescope Ø 5.5 mm WL 300 mm	30°	300 111111		8935462
PANOVIEW ULTRA Telescope Ø 5.5 mm WL 430 mm	0°	430 mm	5.5 mm	89354416
PANOVIEW ULTRA Telescope Ø 5.5 mm WL 430 mm	30°	400 111111		89354426


Recommended accessories		Product no.
Perforated basket for standard telescope 2 (for telescope 8935416/8935426)	(W x H x D) 481 x 54 x 59 mm	38016
Perforated basket for standard telescope 3 (for telescope 89354416/89354426)	(W x H x D) 619 x 54 x 59 mm	38017
Fiber light cable bndl consisting of: Fiber light cable (80663523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 3.5 mm, 2.3 m long	806635231

WOLF

spirit of excellence

||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.


LAPAROSCOPES 10 MM

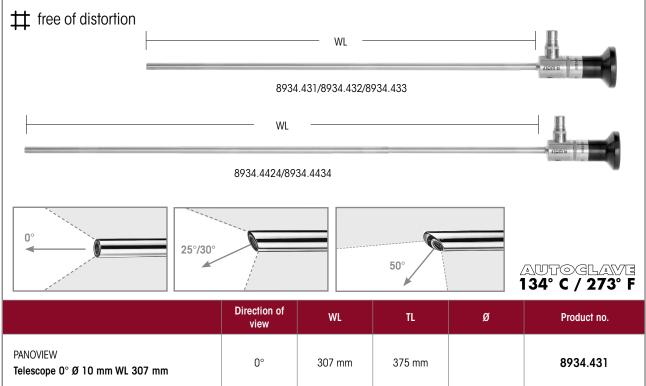

	view		·-		10000100
PANOVIEW Telescope 0° Ø 10 mm WL 307 mm	0°	307 mm	375 mm		8934.431
PANOVIEW Telescope 30° Ø 10 mm WL 307 mm	30°	307 mm	375 mm		8934.432
PANOVIEW Telescope 50° Ø 10 mm WL 310 mm	50°	310 mm	378 mm	10 mm	8934.433
PANOVIEW PLUS Telescope 25° Ø 10 mm WL 438 mm	25°	438 mm	507 mm		8934.4424
PANOVIEW PLUS Telescope 50° Ø 10 mm WL 447 mm	50°	447 mm	516 mm		8934.4434

Recommended accessories		Product no.
Perforated basket for standard telescope 2 (for telescope 8934.431/.432/.433)	(W x H x D) 481 x 54 x 59 mm	38016
Perforated basket for standard telescope 3 (for telescope 8934.4424/.4434)	(W x H x D) 619 x 54 x 59 mm	38017
Fiber lightcable bndl consisting of: Fiber light cable Ø 5 mm TL 2.3 m (80665023), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 5.0 mm, 2.3 m long	806650231
Fiber light cable bndl consisting of: Fiber light cable Ø 5 mm TL 2.3 m (80655023), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 5.0 mm, 2.3 m long	806550231

3D ENDOSCOPE 10 MM

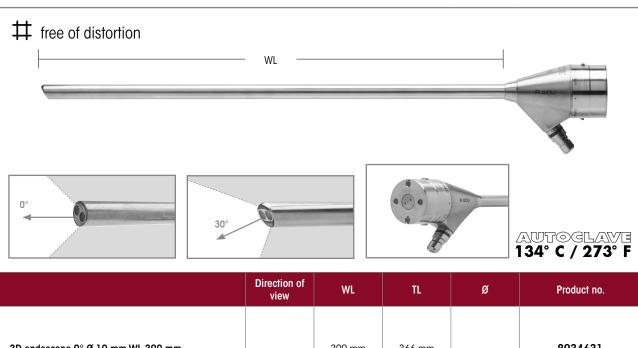

	Direction of view	WL	TL	Ø	Product no.
3D endoscope 0° Ø 10 mm WL 300 mm	0°	300 mm	366 mm		8934631
3D endoscope 0° Ø 10 mm WL 435 mm	o o	435 mm	500 mm	10 mm	89344631
3D endoscope 30° Ø 10 mm WL 301 mm	200	301 mm	366 mm	10 111111	8934632
3D endoscope 30° Ø 10 mm WL 435 mm	- 30°	435 mm	501 mm		89344632


Recommended accessories		Product no.
Perforated basket for 3D telescope	(W x H x D): 583 x 200 x 80 mm	38014
Fusion Fiber light cable bndl consisting of: Fiber light cable Ø 5 mm TL 2.3 m (80655023), projector-side, adapter (8095.07), and endoscope-side adapter (809509)	Ø 5.0 mm, 2.3 m long	806550231

spirit of excellence

||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

SURGICAL LAPAROSCOPE 10 MM

FOR ONE HOLE APPENDECTOMY

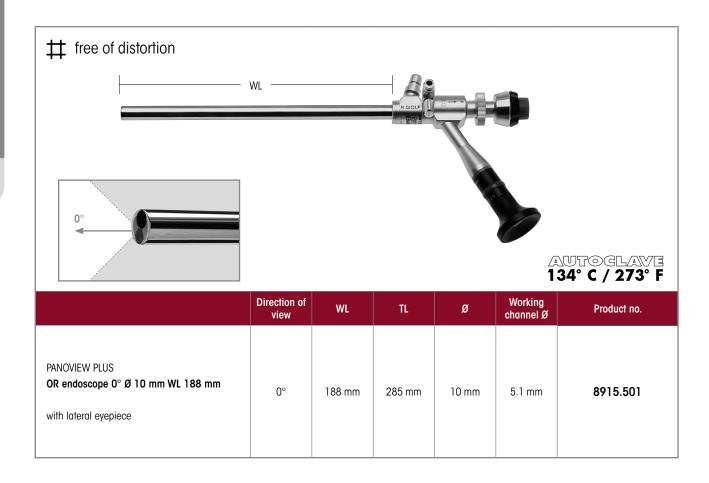

Recommended accessories		Product no.
Universal perforated basket 4 (W x H x D): 538 x 117 x 250 mm		33004
for this: Instrument mat for perforated basket		33001
Fiber light cable bndl consisting of: Fiber light cable \varnothing 5 mm TL 2.3 m (80655023), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 5.0 mm, 2.3 m long	806650231
Fusion Fiber light cable bndl consisting of: Fiber light cable Ø 5 mm TL 2.3 m (80655023), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 5.0 mm, 2.3 m long	806550231





OPTIMIZED FOR 4K UHD AND ICG/NIR APPLICATION SHORT VERSION

spirit of excellence



Note: Compatible with System green (see Imaging Catalog) (ICG/NIR-capable) and its recommended Fusion fiber light cable

Recommended accessories		Product no.
Perforated basket for standard telescope 2	(W x H x D) 481 x 54 x 59 mm	38016
Fiber lightcable bndl consisting of: Fiber light cable Ø 5 mm TL 2.3 m (80665023), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 5.0 mm, 2.3 m long	806650231
Fusion fiber light cable bndl consisting of: Fiber light cable Ø 5 mm TL 2.3 m (80655023), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 5.0 mm, 2.3 m long	806550231





OPTIMIZED FOR 4K UHD AND ICG/NIR APPLICATION LONG VERSION



Note: Compatible with System green (see Imaging Catalog) (ICG/NIR-capable) and its recommended Fusion fiber light cable


Recommended accessories		Product no.
Perforated basket for standard telescope 3	(W x H x D) 619 x 54 x 59 mm	38017
Fiber lightcable bndl consisting of: Fiber light cable Ø 5 mm TL 2.3 m (80665023), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 5.0 mm, 2.3 m long	806650231
Fusion Fiber light cable bndl consisting of: Fiber light cable Ø 5 mm TL 2.3 m (80655023), projector-side adapter (8095.07), and endoscope-side adapter (8095.09)	Ø 5.0 mm, 2.3 m long	806550231

spirit of excellence Product no. 8580.91

LAPAROSCOPES

ACCESSORIES

		Product no.
Sterile adapter	immersible and autoclavable for changing telescopes	8580.91

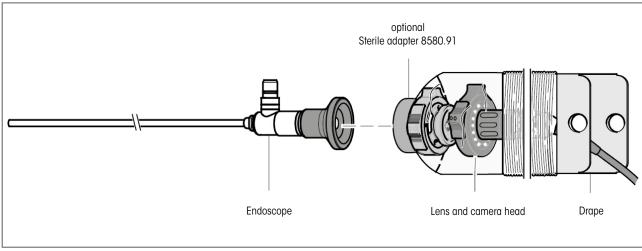



TROCAR SLEEVES 2.2 MM



Accessories	Product no.
Rubber cap capacity 0.8 mm (PACK= 10 PCS) red	88.01



TROCAR SLEEVES 2.5 MM

spirit of excellence

Trocar sleeve with insufflation connector	•			Tip triangular
				Trocar tip triangular Size 2.2 mm
Stainless steel sheath tube, smooth	WL	Capacity	Product no.	WL 82 mm
Trocar sleeve capacity 2.5 mm WL 55 mm	55 mm	2.5 mm	8309.012	8309.121
				WL 119 mm
Trocar sleeve capacity 2.5 mm WL 95 mm	95 mm	2.5 mm	8309.014	8309.123

Accessories	Product no.
Rubber cap capacity 0.8 mm (PACK= 10 PCS) red	88.01



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

TROCAR SLEEVES 3.5 MM

WITH INSUFFLATION STOPCOCK

RIWO-ART trocar sleeves with magnetic ball valve with insufflation stopcock				Tip tapered/blunt Trocar tip blunt Size 3.5 mm	Tip triangular Trocar tip triangular Size 3.5 mm
Stainless steel sheath tube, smooth	WL	Capacity	Product no.	WL 169 mm	WL 169 mm
Trocar sleeve straight capacity 3.5 mm WL 100 mm	100 mm	3.5 mm	8903.014	8903.103	8903.123
Plastic sheath tube with thread					
Trocar sleeve straight capacity 3.5 mm WL 100 mm	100 mm	3.5 mm	8903.034	8903.103	8903.123
				WL 129 mm	WL 129 mm
Trocar sleeve slanted capacity 3.5 mm WL 60 mm	60 mm	3.5 mm	8903.072	8903.101	8903.121

Accessories	Product no.
Spare ball capacity 5.5 mm	8921.901
Spare O rings capacity 3.5 mm (PACK= 10 PCS), capacity Ø 3.5–5.5 mm	8921.951
Sealing cap capacity 2.4–3.4 mm (PACK= 10 PCS) red	89.01
Stopcock insert bndl cap. 3.0 mm (PACK= 5 PCS)	896.0002

Trocar sleeve with membrane valve	Tip tapered/blunt					
Plastic sheath tube with distal screw anchor	WL	Capacity	Product no.	WL 169 mm		
Trocar sleeve straight capacity 3.5 mm WL 40 mm	40 mm	3.5 mm	8929.223	8903.103		



spirit of excellence TROCAR SLEEVES 5.5 MM

RIWO-ART trocar sleeves with magnetic ball valve with insufflation stopcock				Tip tapered/blunt	Tip tapered/ pointed	Tip triangular
				Trocar tip blunt Size 5.5 mm	Trocar tip pointed Size 5.5 mm	Trocar tip triangular Size 5.5 mm
Stainless steel sheath tube	WL	Capacity	Product no.	WL 169 mm	WL 169 mm	WL 169 mm
Trocar sleeve straight capacity 5.5 mm WL 100 mm smooth	100 mm	5.5 mm	8921.014	8921.103	8921.113	8921.123
Trocar sleeve slanted capacity 5.5 mm WL 100 mm smooth	100 mm	5.5 mm	8921.013	8921.103	8921.113	8921.123
Trocar sleeve straight capacity 5.5 mm WL 100 mm with thread	100 mm	5.5 mm	8921.024	8921.103	8921.113	8921.123
Trocar sleeve slanted capacity 5.5 mm WL 100 mm with thread	100 mm	5.5 mm	8921.023	8921.103	8921.113	8921.123
Plastic tube Trocar sleeve straight capacity 5.5 mm WL 100 mm with thread	100 mm	5.5 mm	8921.034	8921.103	8921.113	8921.123
		ı		WL 219 mm	WL 219 mm	WL 219 mm
Trocar sleeve straight capacity 5.5 mm WL 150 mm smooth	150 mm	5.5 mm	8921.016	8921.105	8921.115	8921.125
Trocar sleeve straight capacity 5.5 mm WL 150 mm with thread	150 mm	5.5 mm	8921.026	8921.105	8921.115	8921.125

Accessories	Product no.
Spare ball capacity 5.5 mm	8921.901
Spare O rings capacity 3.5 mm (PACK= 10 PCS), capacity Ø 3.5–5.5 mm	8921.951
Sealing cap capacity 3.4–5.1 mm (PACK= 10 PCS) blue	89.02
Stopcock insert bndl cap. 3.0 mm (PACK= 5 PCS)	896.0002

WOLF

TROCAR SLEEVES 5.5 MM

spirit of excellence

||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.


RIWO-ART trocar sleeves with magnetic ball valve				Tip tapered/blunt	Tip tapered/ pointed	Tip triangular
	u S S S			Trocar tip blunt Size 5.5 mm	Trocar tip pointed Size 5.5 mm	Trocar tip triangular Size 5.5 mm
Stainless steel sheath tube	WL	Capacity	Product no.	WL 129 mm	WL 129 mm	WL 129 mm
Trocar sleeve straight capacity 5.5 mm WL 60 mm smooth	60 mm	5.5 mm	8921.052	8921.101	8921.111	8921.121
Trocar sleeve slanted capacity 5.5 mm WL 60 mm smooth	60 mm	5.5 mm	8921.051	8921.101	8921.111	8921.121
Trocar sleeve straight capacity 5.5 mm WL 60 mm with thread	60 mm	5.5 mm	8921.062	8921.101	8921.111	8921.121
Trocar sleeve slanted capacity 5.5 mm WL 60 mm with thread	60 mm	5.5 mm	8921.061	8921.101	8921.111	8921.121
Plastic tube Trocar sleeve straight capacity 5.5 mm WL 60 mm with thread	60 mm	5.5 mm	8921.072	8921.101	8921.111	8921.121
				WL 169 mm	WL 169 mm	WL 169 mm
Trocar sleeve straight capacity 5.5 mm WL 100 mm smooth	100 mm	5.5 mm	8921.054	8921.103	8921.113	8921.123
Trocar sleeve straight capacity 5.5 mm WL 100 mm with thread	100 mm	5.5 mm	8921.053	8921.103	8921.113	8921.123

Accessories	Product no.
Spare ball capacity 5.5 mm	8921.901
Spare O rings capacity 3.5 mm (PACK= 10 PCS), capacity Ø 3.5–5.5 mm	8921.951
Sealing cap capacity 3.4–5.1 mm (PACK= 10 PCS) blue	89.02




TROTEC TROCAR WITH AUTOMATIC PROTECTIVE FUNCTION


FOR A SINGLE PORT OPERATIONAL PROCEDURE

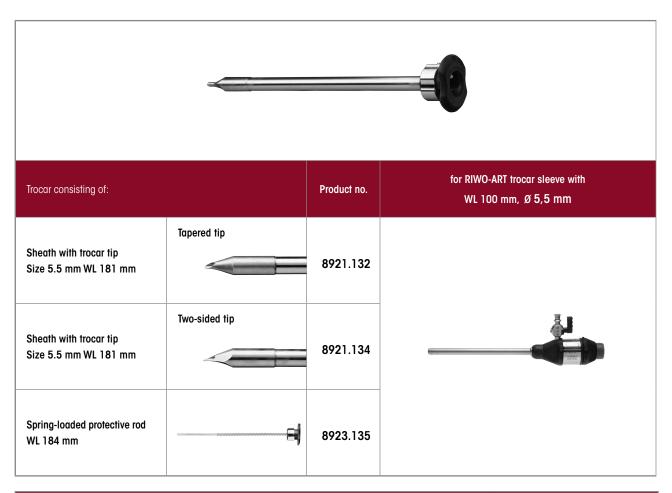


Accessories	Product no.
Protective cap	8923.991



Protective tip automatically pushes back into the cannula through contact with the abdominal wall



The protective tip advances into the free abdomen immediately after penetration of the peritoneum



The atraumatic protective tip in a far distal position prevents perforation of organs and vessels



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

TROCAR SLEEVE 5.5 MM/5.8 MM

PLASTIC WITH SEALING MEMBRANE


△UT©GL△V 134° C / 273°	1 1 1 1 1 1 1 1 1 1					Tip tapered/blunt Trocar tip blunt Size 5.5 mm	Tip tapered/pointed Trocar tip pointed Size 5.5 mm	Tip triangular Trocar tip triangular Size 5.5 mm	
Flexible plastic sheath tube with thread		WL Co	apacity	with stopcock	Product no.	WL 104 mm	WL 104 mm	WL 104 mm	
Trocar sleeve straight			_	•	8919.333				
capacity 5.5 mm WL 62 m with membrane valve	i m 62	! mm 5.	5 mm		8919.331	8919.3311	8919.3312	8919.3313	
						WL 144 mm	WL 144 mm	WL 144 mm	
Trocar sleeve straight capacity 5.5 mm WL 102	mm 10:	2 mm 5.	5 mm	•	8919.353	8919.3511	8919.3512	8919.3513	
with membrane valve					8919.351				
for curved instruments					Tip tapered/blunt	Tip tapered/pointed	Tip triangular	Tip tapered/blunt	
AUTOGLAY 134° C / 273°	7 3 ' F				Trocar tip blunt Size 5.5 mm	Trocar tip pointed Size 5.5 mm	Trocar tip triangular Size 5.5 mm	Trocar tip blunt Size 5.5 mm	
Flexible plastic sheath tube with thread	WL	Capacity	Prod	luct no.	WL 80 mm	WL 80 mm	WL 80 mm	WL 80 mm	
Trocar sleeve straight capacity 5.8 mm WL 62 mm with membrane valve	62 mm	5.8 mm	890	5.331	8905.3311	8905.3312	8905.3313	8905.3315	
					WL 120 mm	WL 120 mm	WL 120 mm	WL 120 mm	
Trocar sleeve straight capacity 5.8 mm WL 102 mm with membrane valve	102 mm	5.8 mm	8905	5.3515	8905.3511	8905.3512	8905.3513	8905.3515	

Accessories	Product no.
Sealing membrane Ø 17 mm, yellow (PACK= 10 PCS)	89.103
Stopcock insert bndl cap 3.0 mm (PACK= 5 PCS)	896.0002



TROCAR SLEEVE 5.7 MM/7 MM/10 MM/12.5 MM

FLEXIBLE PLASTIC SHEATH TUBE

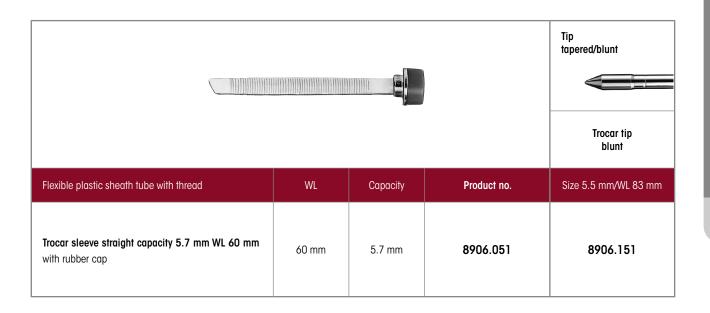

	Tip tapered/blunt Trocar tip blunt			
Ribbed flexible plastic sheath tube	WL	Capacity	Product no.	Size 7.3 mm/TL 108 mm
Trocar sleeve flexible capacity 7 mm WL 74 mm with universal seal	74 mm	7 mm	8906.001	8913.11
		1		Size 10 mm/TL 85 mm
Trocar sleeve flexible capacity 10 mm WL 56 mm with universal seal	56 mm	10 mm	8906.011	8906.111
				Size 12.5 mm/TL 86 mm
Trocar sleeve flexible capacity 12.5 mm WL 57 mm with universal seal	57 mm	12.5 mm	8906.031	8906.131

TROCAR SLEEVE 10 MM


WITH INSUFFLATION STOPCOCK

RIWO-ART trocar sleeves with magnetic ball valve		R.W.C.F. 6723.014		Tip tapered/blunt	Tip tapered/pointed	Tip triangular
				Trocar tip blunt Size 10 mm	Trocar tip pointed Size 10 mm	Trocar tip triangular Size 10 mm
Stainless steel sheath tube	WL	Capacity	Product no.	WL 164 mm	WL 164 mm	WL 164 mm
Trocar sleeve straight capacity 10 mm WL 100 mm	100 mm	10 mm	8923.014	8923.103	8923.113	8923.123
Trocar sleeve slanted capacity 10 mm WL 100 mm	100 mm	10 mm	8923.013	8923.103	8923.113	8923.123
Trocar sleeve straight capacity 10 mm WL 100 mm with thread	100 mm	10 mm	8923.024	8923.103	8923.113	8923.123
Trocar sleeve slanted capacity 10 mm WL 100 mm with thread	100 mm	10 mm	8923.023	8923.103	8923.113	8923.123
				WL 214 mm	WL 214 mm	WL 214 mm
Trocar sleeve straight capacity 10 mm WL 150 mm	150 mm	10 mm	8923.016	-	8923.115	8923.125
Trocar sleeve straight capacity 10 mm WL 150 mm with thread	150 mm	10 mm	8923.026	-	8923.115	8923.125


Accessories	Product no.
Spare ball capacity 7 mm	8923901
Spare O rings capacity 7 mm (PACK= 10 PCS), capacity Ø 7–12.5 mm	8923951
Sealing cap capacity 9.5-10.1 mm (PACK= 10 PCS) red	8908
Stopcock insert bndl cap. 3.0 mm (PACK= 5 PCS)	896.0002

TROTEC TROCAR WITH AUTOMATIC PROTECTIVE FUNCTION

FOR TROCAR SLEEVES 10 MM

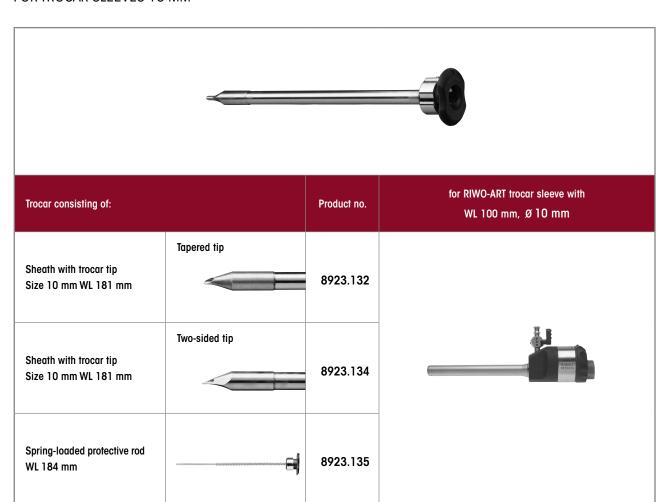


Accessories	Product no.
Protective cap	8923.991




1124 Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with

Protective tip automatically pushes back into the cannula through contact with the abdominal wall



The protective tip advances into the free abdomen immediately after penetration of the peritoneum



The atraumatic protective tip in a far distal position prevents perforation of organs and vessels

HIGH FLOW TROCAR SLEEVE 10 MM

WITH CONNECTOR FOR HIGH FLOW INSUFFLATION TUBE

RIWO-ART trocar sleeves with magnetic ball valve		0	3042	Tip tapered/blunt	Tip tapered/pointed	Tip triangular
				Trocar tip blunt Size 10 mm	Trocar tip pointed Size 10 mm	Trocar tip triangular Size 10 mm
Stainless steel sheath tube	WL	Capacity	Product no.	WL 164 mm	WL 164 mm	WL 164 mm
Trocar sleeve straight capacity 10 mm WL 100 mm	100 mm	10 mm	8923.042	8923.103	8923.113	8923.123
for this:						Product no.
Reducing adapter (PACK= 5 PCS)	Ø 7 mm,		for reduction f Ø 7 mm,Ø 10 to Ø 5.5 mm	from) mm, and Ø 12.5 mm		8923802

Accessories	Product no.
Spare ball capacity 7 mm	8923901
Spare O rings capacity 7 mm (PACK= 10 PCS), capacity Ø 7–12.5 mm	8923951
Sealing cap capacity 9.5–10.1 mm (PACK= 10 PCS) red	8908



TROCAR SLEEVE 12.5 MM

WITH INSUFFLATION STOPCOCK

RIWO-ART trocar sleeves with magnetic ball valve			R GUCUF 8723.014		Tip tapered/blunt	Tip tapered/pointed	Tip triangular
					Trocar tip blunt Size 12.7 mm	Trocar tip pointed Size 12.7 mm	Trocar tip triangular Size 12.7 mm
Stainless steel sheath tub	ре	WL	Capacity	Product no.	WL 164 mm	WL 164 mm	WL 164 mm
Trocar sleeve straight capacity 12.5 mm WL 100 mm	•	100 mm	12.5 mm	8924.014	8924.103	8924.113	8924.123
Trocar sleeve slanted capacity 12.5 mm WL 100 mm	c	100 mm	12.5 mm	8924.013	8924.103	8924.113	8924.123
					WL 214 mm	WL 214 mm	WL 214 mm
Trocar sleeve straight capacity 12.5 mm WL 150 mm with thread		150 mm	12.5 mm	8924.026	-	8924.115	8924.125
Trocar sleeve straight capacity 12.5 mm WL 150 mm	• c	150 mm	12.5 mm	8924.016	-	8924.115	8924.125
for this:							
Reducing adapter		*n		for reduction f Ø 10 mm to Ø Ø 12.5 mm to	5.5 mm and		8923.802
(PACK= 5 PCS)		for reduction from Ø 12.5 mm to Ø 10 mm			8924.802		


Accessories	Product no.
Spare ball capacity 7 mm	8923.901
Spare O rings capacity 7 mm (PACK= 10 PCS), capacity Ø 7–12.5 mm	8923.951
Sealing cap capacity 9.5–10.1 mm (PACK= 10 PCS) red	89.08
Stopcock insert bndl cap. 3.0 mm (PACK= 5 PCS)	896.0002




1124 Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with year with Richard Wolf GmbH.

TROTEC TROCAR WITH AUTOMATIC PROTECTIVE FUNCTION


FOR TROCAR SLEEVES 12.5 MM

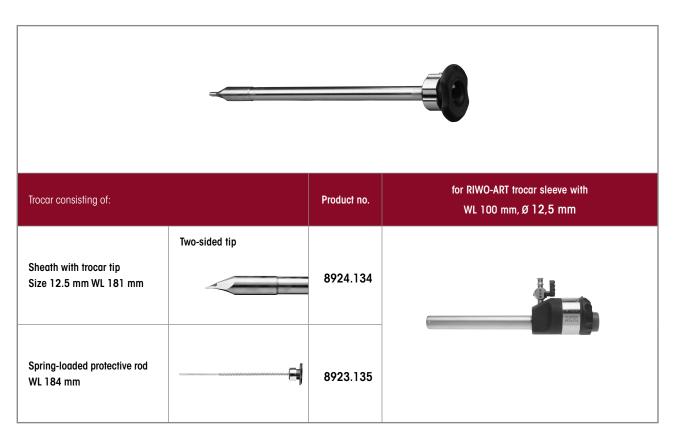


Accessories	Product no.
Protective cap	8923.991



Protective tip automatically pushes back into the cannula through contact with the abdominal wall



The protective tip advances into the free abdomen immediately after penetration of the peritoneum




The atraumatic protective tip in a far distal position prevents perforation of organs and vessels



DILATATION AND EXTRACTION INSTRUMENTS

5.5 TO 10/10 TO 12.5 MM

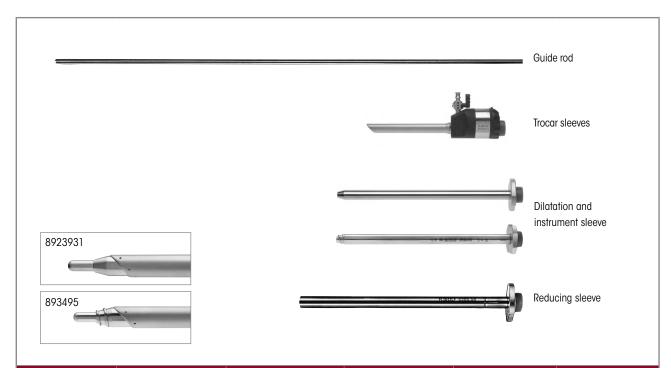

Incision widening	Guide rod	Trocar sleeve slanted	Dilatation sleeve	Instrument sleeve	Reducing sleeve
3.5 mm < 5.5 mm		8921.013 capacity 5.5 mm WL 100 mm			8383.78 Size 5 mm L 155 mm
5.5 mm < 10 mm	8923.921 5.5 mm TL 500 mm	8923.013	8923.931 Size 10 mm WL 170 mm	8385.50	
5.0 mm < 10 mm	8934.951 5 mm TL 500 mm	capacity 10 mm WL 100 mm	8934.95 Size 10 mm WL 172 mm	10 mm WL 170 mm	
10 mm < 12.5 mm		8924.013			8941.901 12 mm WL 180 mm
5.5 mm < 12.5 mm		capacity 12.5 mm WL 100 mm			8941.951 12 mm WL 180 mm
10 mm < 15 mm	8943.901 10 mm TL 500 mm				

REDUCING SLEEVES

FOR RIWO-ART TROCAR SLEEVES



Stainless steel sheath tube	Outer Ø	WL	for instruments	Product no.
Reducing sleeve Size 5 mm WL 155 mm	5 mm	155 mm	3.5 mm	8383.78
Instrument sleeve 10 mm WL 170 mm	10 mm	170 mm	5.5 mm	8385.50
Reducing sleeve 12 mm WL 180 mm	12 mm	180 mm	10 mm	8941.901
Reducing sleeve 12 mm WL 180 mm	12 mm	180 mm 5.5 mm		8941.951
for this:				
Reducing adapter		for reduction from Ø 7 mm, Ø 10 mm, and to Ø 5.5 mm	8923802	
(PACK= 5 PCS)	1	for reduction from Ø 12.5 mm to Ø 10 mm	8924802	


Accessories	Product no.
Sealing cap capacity 3.4–5.1 mm (PACK= 10 PCS) blue	89.02
Sealing cap capacity 9.5–10.1 mm (PACK= 10 PCS) red	8908

WOLF A

VERES CANNULAS

FOR CREATION OF THE PNEUMOPERITONEUM



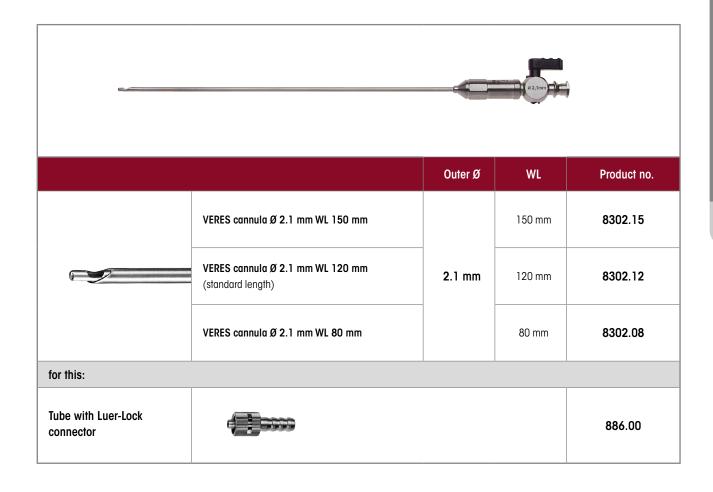

Accessories	Product no.
Stopcock insert bndl cap. 3.0 mm (PACK= 5 PCS)	896.0002






THE LAPAROSCOPIC TOOLBOX


The toolbox principle

ERAGON modular allows the surgeon to create their ideal laparoscopic set. Ergonomic handles, diameters relevant to all medical practice, useful working lengths, and a range of jaw sections can be combined as necessary. This universal compatibility also ensures that individual trays can comprise fewer instruments – for more efficiency and one way of cutting costs

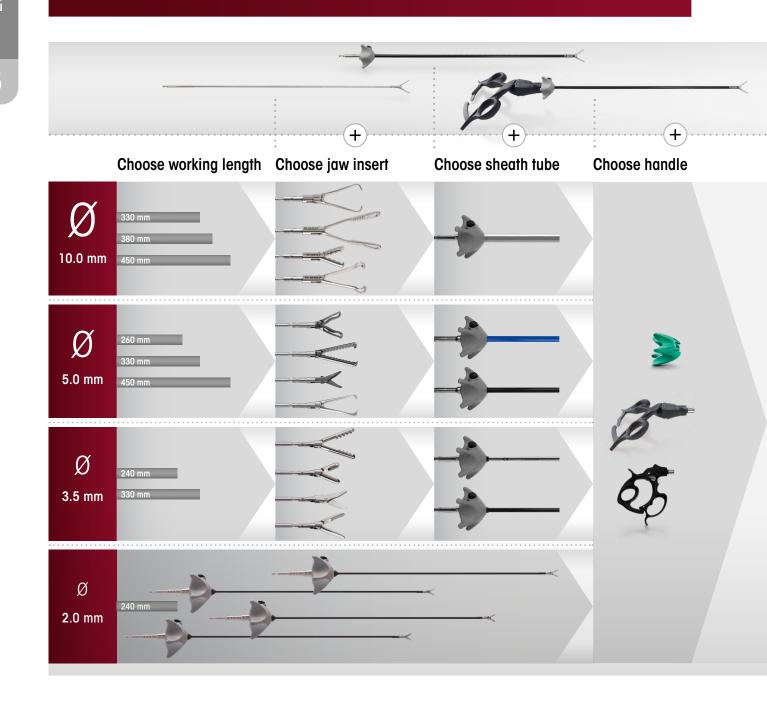





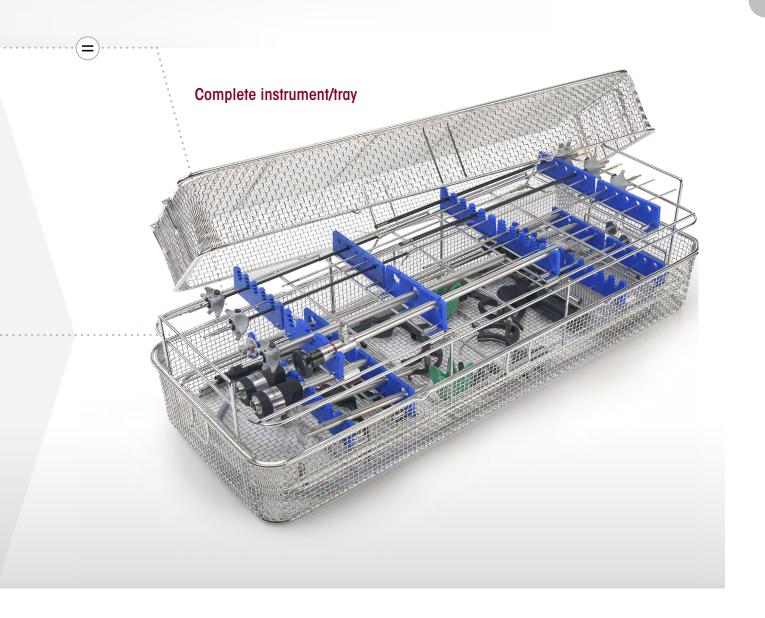



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

ERAGON micro Ø 2 MM, INSULATED

		Handle	e, axial
ER/GON _{axial}			
All jaw inserts and sheath tubes can also bined with ERAGONaxial	be com-	without lock, with HF connector	without lock, with HF connector
Rotatable knob	Product no.	83930083	83930084
	8988	•	•

Jaw insert	Jaw insert			Handle, pistol-shaped	Complete instrument
JL				30	Jaw insert with sheath tube Handle
			WL 240 mm	without lock, with HF, mono	
	JL*	Product no.		83930073	Product no.
Scissors mono Ø 2 mm bndl straight, double-action	7 mm	8388200	•	•	83882007
Dissector forceps mono Ø 2 mm bndl straight, double-action	7 mm	8388201	•	•	83882017
Atraumatic grasping forceps mono Ø 2 mm bndl	7 mm	8388202	•	•	83882027

 $^{^{*}}$ JL = jaw length when jaw section closed (approximate measurements) HF connection cable: see sheet GYN114/115

ERAGON micro Ø 2 MM, INSULATED

Jaw insert			Sheath tube, Ø 2.0 mm, insulated	Handle, pistol-shaped	Complete instrument
JL JL				30	Jaw insert with sheath tube Handle
			WL 240 mm	with lock, with HF, mono	
	JL*	Product no.		83930074	Product no.
Grasping forceps mono Ø 2 mm bndl double-action	7 mm	8388203	•	•	83882037

 $^{^{\}ast}$ JL = jaw length when jaw section closed (approximate measurements) HF connection cable: see sheet GYN114/115

Accessories for manual and machine reprocess	Product no.	
	Irrigation adapter Ø 9 mm, length 64 mm	163502



ERAGON minir Ø 3.5 MM, INSULATED

		Handle, axial			
ERAGON _{axial}					
All jaw inserts and sheath tubes can also bined with ERAGONaxial	I jaw inserts and sheath tubes can also be com- ned with ERAGONaxial		without lock, with HF connector		
Rotatable knob Product no.		83930083	83930084		
2 PODE	8988	•	•		

Jaw insert R.WOLF JL			Sheath tube, Ø 3.5 mm, insulated		Handle, pistol-shaped	Complete instrument
			-	(E) (E)	3	• Jaw insert with sheath tube • Handle
			WL 240 mm	WL 330 mm	with lock, with HF, mono	
	JL*	Product no.	8390933	8391933	83930074	Product no.
Dissector forceps mono Ø 3.5 mm bndl	15 mm	8390207	•		•	83902077
curved to the left, double-action	13111111	8391207		•	•	83912077
Dissector forceps mono Ø 3.5 mm bndl	18 mm	8390221	•		•	83902217
long, fine tip, double-action	10111111	8391221		•	•	83912217
Dissector forceps mono Ø 3.5 mm bndl	14 mm	8390222	•		•	83902227
short, fine tip, double-action	14111111	8391222		•	•	83912227
Dissector forceps mono Ø 3.5 mm bndl	14 mm	8390223	•		•	83902237
angled, double-action	14111111	8391223		•	•	83912237

^{*} JL = jaw length when jaw section closed (approximate measurements)

ERAGON mini Ø 3.5 MM, INSULATED

Jaw insert				e, Ø 3.5 mm, lated	Handle, pis	stol-shaped	Complete instrument • Jaw insert with sheath
JL	R.WOLF			Emere -	र	6	tube • Handle
<u> </u>	—		WL 240 mm	WL 330 mm	without lock, with HF, mono	with lock, with HF, mono	
	JL*	Product no.	8390933	8391933	83930073	83930074	Product no.
Metzenbaum scissors mono Ø 3.5 mm bndl	. 16 mm	8390215	•		•		83902157
double-action	10111111	8391215		•	•		83912157
Metzenbaum scissors mono Ø 3.5 mm bndl	14 mm	8390224	•		•		83902247
fine-toothed, curved, double-action	14111111	8391224		•	•		83912247
Hook scissors mono Ø 3.5 mm bndl	8 mm	8390227	•		•		83902277
R.WOLF single-action		8391227		•	•		83912277
Double spoon forceps mono Ø 3.5 mm bndl	12 mm	8390216	•			•	83902167
R.Walf	12 111111	8391216		•		•	83912167
Friedel punch mono Ø 3.5 mm bndl	10	8390217	•			•	83902177
R.WOLF	10 mm	8391217		•		•	83912177

^{*} JL = jaw length when jaw section closed (approximate measurements) HF connection cable: see sheet GYN114/115

Accessories for manual and machine reprocess	Product no.	
	Irrigation adapter Ø 9 mm, length 64 mm	163502



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

ERAGON minir Ø 3.5 MM, UNINSULATED

		Handle	Handle, axial				
ERAGON axial							
All jaw inserts and sheath tubes can als bined with ERAGONaxial	All jaw inserts and sheath tubes can also be combined with ERAGONaxial		with lock, without HF connector, not rotatable				
Rotatable knob Product no.		83930082	83930085				
2 F- (UC) 5	8988	•					

Jaw insert	Jaw insert			e, Ø 3.5 mm, ulated	Handle, pistol-shaped	Complete instrument	
JL	R.WOLF			-	3	Jaw insert with sheath tube Handle	
_	'		WL 240 mm	WL 330 mm	with lock, without HF		
	JL*	Product no.	8390934	8391934	83930072	Product no.	
Atraumatic grasping forceps Ø 3.5 mm bndl	14 mm	8390208	•		•	83902087	
fenestrated, double-action	14 111111	8391208		•	•	83912087	
Atraumatic grasping forceps Ø 3.5 mm bndl	17 mm	8390218	•		•	83902187	
fenestrated, single-action	17 111111	8391218		•	•	83912187	
Atraumatic grasping forceps Ø 3.5 mm bndl	17 mm	8390225	•		•	83902257	
double fenestrated, curved, single-action	17 111111	8391225		•	•	83912257	
Atraumatic grasping forceps Ø 3.5 mm bndl	19 mm	8390226	•		•	83902267	
fenestrated, double-action	17 111111	8391226		•	•	83912267	

^{*} JL = jaw length when jaw section closed (approximate measurements) $\,$



ERAGON modular \emptyset 3.5 MM, UNINSULATED

Jaw insert	Jaw insert			e, Ø 3.5 mm, ulated	Handle, pistol-shaped	Complete instrument
JL	-LF	-	-	E C	Jaw insert with sheath tube Handle	
 			WL 240 mm	WL 330 mm	with lock, without HF	
	JL*	Product no.	8390934	8391934	83930072	Product no.
Grasping forceps Ø 3.5 mm bndl	13 mm	8390219	•		•	83902197
fenestrated, double-action	13 111111	8391219		•	•	83912197
Grasping forceps Ø 3.5 mm bndl	17	8390220	•		•	83902207
fenestrated, single-action	17 mm	8391220		•	•	83912207
Universal grasping forceps Ø 3.5 mm bndl	14 mm	8390209	•		•	83902097
double-action	14 mm	8391209		•	•	83912097
Babcock forceps Ø 3.5 mm bndl	19 mm	8390210	•		•	83902107
double-action	I A IIIIII	8391210		•	•	83912107

^{*} JL = jaw length when jaw section closed (approximate measurements) HF connection cable: see sheet GYN114/115

Accessories for manual and machine reprocess	Product no.	
	Irrigation adapter Ø 9 mm, length 64 mm	163503



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

ERAGON modular Ø 5.0 MM, INSULATED

			Handle, axial				
ERAGON axial		-					
All jaw inserts and sheath tubes can also be combined with ERAGONaxial		with lock	without lock, with HF connector	without lock, with HF connector	with lock, not rotatable		
Rotatable knob	Rotatable knob Product no.		83930083	83930084	83930085		
Z FERRICA	8988	•	•	•			

Jaw insert	Jaw insert			i.O mm, insulated	Handle, pistol-shaped	Complete instrument
R.WOLF			-(5 5	• Jaw insert with sheath tube • Handle
	'		SL 330 mm	SL 450 mm	with lock, with HF, mono	
	JL*	Product no.	8393933	8394933	83930074	Product no.
Maryland dissector forceps mono Ø 5 mm bndl	01	8393.281	•		•	83932817
curved, with fine cross toothing, double-action	21 mm	8394.281		•	•	83942817
Mixter dissector forceps mono Ø 5 mm bndl R.WOLF angled, fine, pyramid-shaped toothing, double-action	22 mm	8393.283	•		•	83932837
Grasping forceps, mono Ø 5 mm bndl R.WOLF fenestrated, with fine cross toothing, 15 mm long, sin- gle-action	21 mm	8393.185	•		•	83931857
Grasping forceps, mono Ø 5 mm bndl	26 mm	8393.184	•		•	8 3931847
fenestrated, with fine cross toothing, 20 mm long, sin- gle-action	20 111(11)	8394.184		•	•	83941847

^{*} JL = jaw length when jaw section closed (approximate measurements)



ERAGON modular Ø 5.0 MM, INSULATED

Jaw insert			Sheath tub	e, Ø 5.0 mm	, insulated	Har	ndle, pistol-sha	ped	Complete instrument
	JL_			-		ठे	65	E	Jaw insert with sheath tube Handle
		SL 260 mm	SL 330 mm	SL 450 mm	with lock, without HF	without lock, with HF, mono	with lock, with HF, mono		
	JL*	Product no.	8392933	8393933	8394933	83930072	83930073	83930074	Product no.
Dolphin dissector forceps mono Ø 5 mm bndl RUDLF angled, with fine cross- toothing, with channel, narrow, 15 mm long, double-action	17 mm	8393.285		•			•		83932857
Dissector forceps mono Ø 5 mm bndl R.WDLF fine pyramid-shaped toothing, narrow, 18 mm, double-action	23 mm	8393.289		•				•	83932897
Atraumatic grasping forceps Ø 5 mm bndl R.WOLF Channel with wavy tooth edge, 20 mm, single-action	26 mm	8393.292		•		•			83932925
Atraumatic grasping forceps Ø 5 mm bndl	26 mm	8393.293		•		•			83932935
Channel with wavy tooth edge, 20 mm, double-action	20 111111	8394.293			•	•			83942935
Grasping forceps, mono Ø 5 mm bndl R.WOLF fine, pyramid-shaped toothing, narrow double-action	19 mm	8393.288		•				•	83932887
Atraumatic grasping forceps mono Ø 5 mm bndl		8392.181	•					•	83921817
R.WOLF fenestrated,	19 mm	8393.181		•				•	83931817
with cross toothing, double-action		8394.181			•			•	83941817

^{*} JL = jaw length when jaw section closed (approximate measurements)



ERAGON modular Ø 5.0 MM, INSULATED

			Handle, axial				
ERAGON _{axial}		-					
All jaw inserts and sheath tubes can also be combined with ERAGONaxial		with lock	without lock, with HF connector	without lock, with HF connector	with lock, not rotatable		
Rotatable knob	Rotatable knob Product no.		83930083	83930084	83930085		
2 I FY WOLF	8988	•	•	•			

Jaw insert			Sheath tube, Ø 5.0 mm, insulated		Handle, pis	Complete instrument	
R.WOLF					30	8	• Jaw insert with sheath tube • Handle
	'		SL 330 mm	SL 450 mm	with lock, without HF	without lock, with HF, mono	
	JL*	Product no.	8393933	8394933	83930072	83930073	Product no.
Atraumatic grasping forceps mono Ø 5 mm bndl	10 mm	8393.195	•			•	83931957
smooth, double-action	18 mm	8394.195		•		•	83941957
Babcock forceps Ø 5 mm bndl R.WOLF Gripping surface with fine cross toothing, double-action	24 mm	8393.186	•		•		83931867
Babcock forceps Ø 5 mm bndl	26 mm	8393.187	•		•		83931877
large distal gripping surface with fine cross toothing, double-action	26 mm	8394.187		•	•		83941877
Debakey forceps Ø 5 mm bndl R.WOLF atraumatic clamp, double-action	39 mm	8393190	•		•		83931907

^{*} JL = jaw length when jaw section closed (approximate measurements)

ERAGON modular Ø 5.0 MM, INSULATED

Jaw insert	Jaw insert			.0 mm, insulated	Handle, pis	stol-shaped	Complete instrument
	JL JL				3	\$	• Jaw insert with sheath tube • Handle
,			SL 330 mm	SL 450 mm	with lock, without HF	with lock, with HF, mono	
	JL*	Product no.	8393933	8394933	83930072	83930074	Product no.
Debakey forceps Ø 5 mm bndl atraumatic clamp, double-action	48 mm	8393191	•		•		83931917
Grasping forceps, mono Ø 5 mm bndl R.WOLF with a row of teeth, double-action	17 mm	8393.485	•			•	83934857
Grasping forceps, mono Ø 5 mm bndl R.WOLF with one tooth, fine cross toothing, narrow, double-action	19 mm	8393.486	•			•	83934867
Grasping forceps, mono Ø 5 mm bndl R.WOLF with two teeth, fine cross toothing, single-action	17 mm	8393.487	•			•	83934877
Grasping forceps Ø 5 mm bndl	24 mm	8393.490	•		•		83934907
with two teeth wavy gripping surface, double-action	26 mm	8394.490		•	•		83944907
Petelin dissector forceps mono Ø 5 mm bndl R.WOLF angled 30° to the left, with cross toothing, single-action	17 mm	8393.282	•			•	83932827

^{*} JL = jaw length when jaw section closed (approximate measurements)



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

ERAGON modular Ø 5.0 MM, INSULATED

			Handle, axial				
ERAGON axial		-					
with ERAGONaxial			without lock, with HF connector	without lock, with HF connector	with lock, not rotatable		
Rotatable knob	Rotatable knob Product no.		83930083	83930084	83930085		
2 PUIDIF	8988	•	•	•			

Jaw insert			Sheath tube, Ø 5.0 mm, insulated	Har	Handle, pistol-shaped		
R.WOLF				TO	65	S	Jaw insert with sheath tube Handle
			SL 330 mm	with lock, without HF	without lock, with HF, mono	with lock, with HF, mono	
	JL*	Product no.	8393933	83930072	83930073	83930074	Product no.
Plate-shaped grasping forceps mono Ø 5 mm bndl R.WOLF fenestrated with fine cross toothing, double-action	18 mm	8393.182	•				83931827
Grasping forceps mono Ø 5 mm bndl R.WOLF with cross toothing, double-action	21 mm	8393.183	•		•		83931837
Grasping forceps mono Ø 5 mm bndl R.WOLF distal cross toothing with channel, double-action	15 mm	8393.287	•		•		83932877
Claw grasping forceps Ø 5 mm bndl R.WOLF double-action	27 mm	8393.494	•	•			83934945

^{*} JL = jaw length when jaw section closed (approximate measurements)



ERAGON modular

\emptyset 5.0 MM, INSULATED

Jaw insert	Jaw insert R.WOLF		Sheath tube, Ø 5	i.0 mm, insulated	Har	ndle, pistol-sha	ped	Complete instrument
JL			-		3	65	E	Jaw insert with sheath tube Handle
			SL 330 mm	SL 450 mm	with lock, without HF	without lock, with HF, mono	with lock, with HF, mono	
	JL*	Product no.	8393933	8394933	83930072	83930073	83930074	Product no.
Myoma grasping forceps Ø 5 mm bndl 2x3-claw, single-action	29 mm	8393.488	•		•			83934887
Universal grasping forceps mono Ø 5 mm bndl RUILF with pyramid-shaped toothing and cross toothing, double-action	18 mm	8393.481	•				•	83934817
Universal grasping forceps Ø 5 mm bndl RUILE pyramid-shaped toothing and cross toothing, double-action	26 mm	8393.482	•		•			83934827
Grasping forceps mono Ø 5 mm bndl Pike-mouth, double-action	20 mm	8393.483	•				•	83934837
Biopsy forceps mono Ø 5 mm bndl	10	8393.091	•			•		83930917
with spikes, double-action	13 mm	8394.091		•		•		83940917
Biopsy forceps mono Ø 5 mm bndl	14	8393.092	•			•		83930927
severing, single-action	14 mm	8394.092		•		•		83940927

^{*} JL = jaw length when jaw section closed (approximate measurements)

ER GON modular

\emptyset 5.0 MM, INSULATED

			Handle	e, axial	
ERAGON _{axial}			-		
All jaw inserts and sheath tubes can also be with ERAGONaxial	e combined	with lock	without lock, with HF connector	without lock, with HF connector	with lock, not rotatable
Rotatable knob	Product no.	83930082	83930083	83930084	83930085
2 I FY WOLF	8988	•	•	•	

Jaw insert			Sheath tube, Ø 5	i.O mm, insulated	Handle, pis	Complete instrument	
JL JL		-(\$	30	• Jaw insert with sheath tube • Handle	
	'		SL 330 mm	SL 450 mm	with lock, without HF	without lock, with HF, mono	
	JL*	Product no.	8393933	8394933	83930072	83930073	Product no.
Biopsy forceps mono Ø 5 mm bndl R.WOLF pointed spoon forceps, single-action	20 mm	8393.093	•			•	83930937
Knot pusher Ø 5 mm bndl R.WOLF	17 mm	8393.345	•		•		83933457
with distal recess, double-action	17 111111	8394.345		•	•		83943457
Grasping forceps Ø 5 mm bndl RWOLF spring jaw sections fenestrated with cross toothing, double-action	37 mm	8393.188	•		•		83931887
Grasping forceps Ø 5 mm bndl	47	8393.189	•		•		83931897
spring jaw sections fenestrated with cross toothing, double-action	47 mm	8394.189		•	•		83941897

^{*} JL = jaw length when jaw section closed (approximate measurements)



ERAGON modular Ø 5.0 MM, INSULATED

Complete Jaw insert Sheath tube, \emptyset 5.0 mm, insulated Handle, pistol-shaped instrument Jaw insert with sheath tube • Handle SL with lock. with lock. SL450 mm 330 mm without HF with HF, mono **Product** JL* 8393933 8394933 83930072 83930074 Product no. no. Debakey forceps Ø 5 mm bndl ₹ R.WOLF 8393.291 83932917 atraumatic, spring jaw sections with cross toothing, double-action **Dissector forceps** mono Ø 5 mm bndl 8393192 83931927 R.WOLF 18 mm angled, 8394192 83941927 double-action Grasping forceps, mono Ø 5 mm bndl 8393193 83931937 16 mm 8394193 83941937 double-action Dissector forceps mono Ø 5 mm bndl 83931947 8393194 8394194 83941947 double-action Dissector forceps mono Ø 5 mm bndl 8393197 83931977 R.WOLF 30 mm 83941977 8394197 double-action Dissector forceps mono Ø 5 mm bndl 8393198 83931987 **₹.WOLF** 33 mm 8394198 83941987 double-action

 $^{^{*}}$ JL = jaw length when jaw section closed (approximate measurements)



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

ERAGON modular Ø 5.0 MM, INSULATED

		Handle, axial				
ER/GON _{axial}	biod		-			
All jaw inserts and sheath tubes can also b with ERAGONaxial	e combined	with lock	without lock, with HF connector	without lock, with HF connector	with lock, not rotatable	
Rotatable knob	Product no.	83930082	83930083	83930084	83930085	
P HIGH	8988	•	•	•		

Jaw insert	Jaw insert		Sheath tube, Ø 5	i.0 mm, insulated	Handle, pistol-shaped	Complete instrument
JL.		-		30	• Jaw insert with sheath tube • Handle	
			SL 330 mm	SL 450 mm	with lock, with HF, mono	
	JL*	Product no.	8393933	8394933	83930074	Product no.
Dissector forceps mono Ø 5 mm bndl	20	8393199	•		•	83931997
double-action	32 mm	8394199		•	•	83941997
Dissector forceps mono Ø 5 mm bndl		8393200	•		•	83932007
fine tip, double-action	19 mm	8394200		•	•	83942007
Atraumatic grasping forceps mono Ø 5 mm bndl R.WOLF atraumatic, with cross toothing, double-action	16 mm	8393210	•		•	83932107
Atraumatic grasping forceps mono Ø 5 mm bndl	10mm	8393220	•		•	83932207
atraumatic, with cross toothing, double-action	19mm	8394220		•	•	83942207

^{*} JL = jaw length when jaw section closed (approximate measurements)



ERAGON modular

Ø 5.0 MM, INSULATED

Jaw insert	Jaw insert		Sheath tube, Ø 5	.0 mm, insulated	Handle, pis	stol-shaped	Complete instrument
	JL JL		-(30	\$	• Jaw insert with sheath tube • Handle
			SL 330 mm	SL 450 mm	with lock, without HF	with lock, with HF, mono	
	JL*	Product no.:	8393933	8394933	83930072	83930074	Product no.:
Atraumatic grasping forceps Ø 5 mm bndl	29 mm	8393223	•		•		83932237
atraumatic, with pyramid- shaped toothing and cross toothing, double-action	27	8394223		•	•		83942237
Atraumatic grasping forceps Ø 5 mm bndl	0.5	8393250	•		•		83932507
atraumatic, single fenestrated with cross toothing, double-action	25 mm	8394250		•	•		83942507
Atraumatic grasping forceps Ø 5 mm bndl		8393229	•		•		83932297
atraumatic, double fenestrated and curved single-action	32 mm	8394229		•	•		83942297
Grasping forceps Ø 5 mm bndl	15	8393230	•		•		83932307
atraumatic, narrow and rounded, double-action	15 mm	8394230		•	•		83942307
Dissector forceps mono Ø 5 mm bndl	19 mm	8393240	•			•	83932407
curved, double-action		8394240		•		•	83942407
Dissector forceps mono Ø 5 mm bndl	17 mm	8393242	•		•		83932427
single fenestrated double-action	17 (11)(11)	8394242		•	•		83942427

^{*} JL = jaw length when jaw section closed (approximate measurements)



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

ER/GON modular

Ø 5.0 MM, INSULATED

			Handle	e, axial	
ERAGON axial	. a a mala in a d		-		
All jaw inserts and sheath tubes can also be with ERAGONaxial	combined	with lock	without lock, with HF connector	without lock, with HF connector	with lock, not rotatable
Rotatable knob	Product no.	83930082	83930083	83930084	83930085
J P. WOLF	8988	•	•	•	

Jaw insert	Jaw insert			.0 mm, insulated	Handle, pistol-shaped		Complete instrument
R.WOLF				क क		• Jaw insert with sheath tube • Handle	
		-1	SL 330 mm	SL 450 mm	with lock, without HF	with lock, with HF, mono	
	JL*	Product no.	8393933	8394933	83930072	83930074	Product no.
Intestine grasping forceps Ø 5 mm bndl	00	8393249	•		•		83932497
atraumatic, single fenestrated with cross toothing, double-action	38 mm	8394249		•	•		83942497
Debakey forceps mono Ø 5 mm bndl curved, double-action	35 mm	8393256	•			•	83932567
Debakey forceps mono Ø 5 mm bndl	47 mm	8393258	•			•	83932587
double-action	47 IIIM	8394258		•		•	83942587

 $^{^{*}}$ JL = jaw length when jaw section closed (approximate measurements) HF connection cable: see sheet GYN114/115



ERAGON modular

Ø 5.0 MM, INSULATED

Jaw insert	Jaw insert			.0 mm, insulated	Handle, pistol-shaped	Complete instrument	
Ju	JL				65	Jaw insert with sheath tube Handle	
	, <u></u>		SL SL 330 mm 450 mm		without lock, with HF, mono		
	JL*	Product no.	8393933	8394933	83930073	Product no.	
Metzenbaum scissors mono Ø 5 mm bndl		8393.041	•		•	83930417	
curved, double-action	23 mm	8394.041		•	•	83940417	
Metzenbaum micro scissors mono Ø 5 mm bndl R.WOLF curved, double-action	18 mm	8393.044	•		•	83930447	
Scissors mono Ø 5 mm bndl P. WOLF narrow, straight, double-action	20 mm	8393.045	•		•	83930457	
Hook scissors mono Ø 5 mm bndl	14 mm	8393.081	•		•	83930817	
serrated, single-action		8394.081		•	•	83940817	
Metzenbaum micro scissors mono Ø 5 mm bndl		8393243	•		•	83932437	
double-action	21 mm	8394243		•	•	83942437	
Scissors mono Ø 5 mm bndl	0,	8393246	•		•	83932467	
curved and toothed double-action	26 mm	8394246		•	•	83942467	

^{*} JL = jaw length when jaw section closed (approximate measurements)



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

ERAGON modular Ø 5.0 MM, INSULATED

			Handle	e, axial	
ERAGON axial	acombined		-		
All jaw inserts and sheath tubes can also be with ERAGONaxial	ecombined	with lock	without lock, with HF connector	without lock, with HF connector	with lock, not rotatable
Rotatable knob	Product no.	83930082	83930083	83930084	83930085
2 PUIDIF	8988	•	•	•	

Jaw insert			Sheath tube, Ø 5	i.0 mm, insulated	Handle, pis	stol-shaped	Complete instrument
JL			-		TO	65	Jaw insert with sheath tube Handle
			SL 330 mm	SL 450 mm	with lock, without HF	without lock, with HF, mono	
	JL*	Product no.	8393933	8394933	83930072	83930073	Product no.
Scissors mono Ø 5 mm bndl		8393248	•			•	83932487
fine-toothed, fine tip double-action	22 mm	8394248		•		•	83942487
Knot pusher Ø 5 mm bndl	17	8393.345	•		•		83933457
with distal recess, double-action	17 mm	8394345		•	•		83943457
Gastric band manipulator Ø 5 mm bndl	47 mm	8393253	•		•		83932537
90° articulating with distal slot	4/ IIIM	8394253		•	•		83942537

^{*} JL = jaw length when jaw section closed (approximate measurements) HF connection cable: see sheet GYN114/115

Accessories for manual and machine reprocessing	Product no.	
	Irrigation adapter Ø 9 mm, length 64 mm	163502

ERAGON modu blades Ø 5.0 MM, INSULATED

		Handle, axial	
ERAGONaxial All ignuments and cheath tubes on also be combined.			
All jaw inserts and sheath tubes can also be combined with ERAGONaxial		without lock, with HF connector	
Rotatable knob	Product no.	83930083	
T P BOTH	8988	•	

Scissors attachment		Tension rod Ø 5.0 mm		Sheath tube insulated Ø 5.0 mm			Handle pistol-shaped	Complete instrument	
							8	Jaw insert with sheath tube Handle	
			for SL 330 mm	for SL 450 mm	SL 240 mm	SL 310 mm	SL 430 mm	without lock, rotatable with HF connector	
	Product no.	8392934	8393934	8394934	8392935	8393935	8394935	83930073	Product no.
Metzenbaum scissors attachment mono		•			•			•	83920407
	4393040		•			•		•	83930407
(PACK= 10 PCS), sterile, disposable				•			•	•	83940407





||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

ERAGON modular Ø 10 MM, UNINSULATED

		Handle	e, axial	
ERAGON axial				
jaw inserts and sheath tubes can also be com- ned with ERAGONaxia l		with lock, without HF connector	with lock, without HF connector, not rotatable	
Rotatable knob	Product no.	83930082	83930085	
S IS MORE	8988	•		

Jaw insert			Sheath tube, Ø 10.0 mm, uninsulated		Handle, pistol-shaped	Complete instrument
JL			02	\	ES .	 Jaw insert with sheath tube Handle
 	1		SL 327 mm	SL 447 mm	with lock, without HF	
	JL*	Product no.	8395902	8396902	83930072	Product no.
Maryland dissector forceps Ø 10 mm bndl	36 mm	8395.225	•		•	83952257
double-action	30 111111	8396225		•	•	83962257
Dissector forceps Ø 10 mm bndl	35 mm	8395.226	•		•	83952268
angled, double-action	35 11111	8396226		•	•	83962267
Grasping forceps Ø 10 mm bndl	20 mm	8395.236	•		•	83952368
Pike-mouth double-action	20 111111	8396236		•	•	83962367
Grasping forceps Ø 10 mm bndl	49 mm	8395.204	•		•	83952048
2/3 jaws single-action	47	8396204		•	•	83962047

 $[\]ensuremath{^{*}}\ \ensuremath{\text{JL}} = \ensuremath{\text{jaw}}\ \ensuremath{\text{length}}\ \ensuremath{\text{when jaw}}\ \ensuremath{\text{section closed}}\ \ensuremath{\text{(approximate measurements)}}$

ERAGON modular

Ø 10 MM, UNINSULATED


Jaw insert			Sheath tube, Ø 10.0 mm, uninsulated		Handle, pistol-shaped		Complete instrument	
			02			3		 Jaw insert with sheath tube Handle
JL	_		SL 327 mm	SL 447 mm	SL 387 mm	with with	lock, out HF	
	JL*	Product no.	8395902	8396902	8397902	83930072	83930082	Product no.
Claw grasping forceps Ø 10 mm bndl double-action	38 mm	8395.489	•			•		83954897
Claw grasping forceps Ø 10 mm bndl with additional row of teeth, double-action	38 mm	8395490	•			•		83954907
Babcock forceps Ø 10 mm bndl	42 mm	8395.187	•			•		83951877
large distal gripping surface with fine cross toothing, double-action	42 mm	8396187		•		•		83961877
Babcock forceps Ø 10 mm bndl double-action	38 mm	8395.214	•			•		83952148
Plate-shaped grasping forceps Ø 10 mm bndl	50	8395.234	•			•		83952347
double-action	mm	8396234		•		•		83962347
Spoon forceps Ø 10 mm bndl single-action	31 mm	8395.244	•			•		83952448
Stapler head grasping forceps Ø 10 mm bndl angled 30°, double-action		8397.655			•		•	83976558


^{*} JL = jaw length when jaw section closed (approximate measurements)/HF connection cable: see sheet GYN114/115




||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

ERAGON modular ACCESSORIES

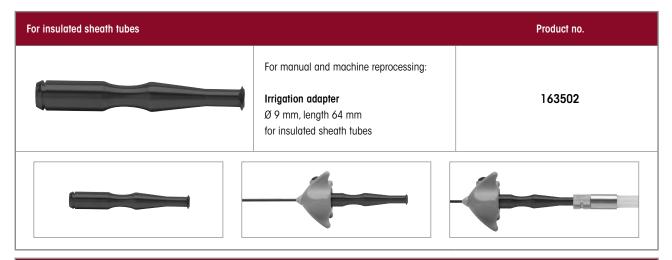

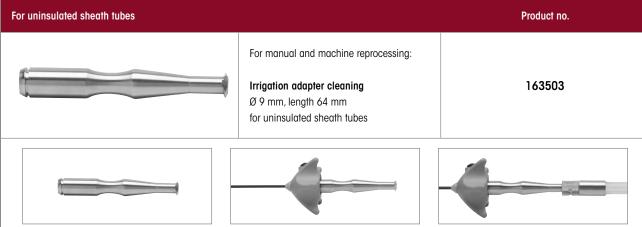

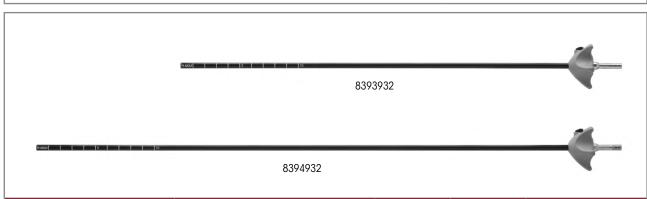

		Ø	SL	Product no.
ERAGONmodular	Sheath tube insulated Ø 5 mm SL 330 mm with distal cm scale	5 mm	330 mm	8393932
	Sheath tube insulated Ø 5 mm SL 450 mm with distal cm scale	5 mm	450 mm	8394932



HANDLE VARIANTS FOR MODULAR SYSTEMS

Handle, pistol-shaped	rotatable	with lock	without lock	with HF	without HF	Product no.
E S	•	•			•	83930072
8	•		•	•		83930073
	•	•		•		83930074

Handle, axial	ERAGON axial	rotatable	with lock	without lock	with HF	without HF	Product no.
	B	•	•			•	83930082
	B	•		•	•		83930083
	8	•	•		•		83930084
	B		•			•	83930085

Optional for 83930082/83930083/8393	Optional for 83930082/83930083/83930084:			
ERAGON axial	Rotatable knob autoclavable	8988		

All ERAGON modular components are compatible with ERAGON axial




| Subject to modifications, Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with

your contact partner or directly with Richard Wolf GmbH.

BIPOLAR FORCEPS 3.5 MM/5.0 MM

WITH SPRING HANDLE MODULAR SYSTEM

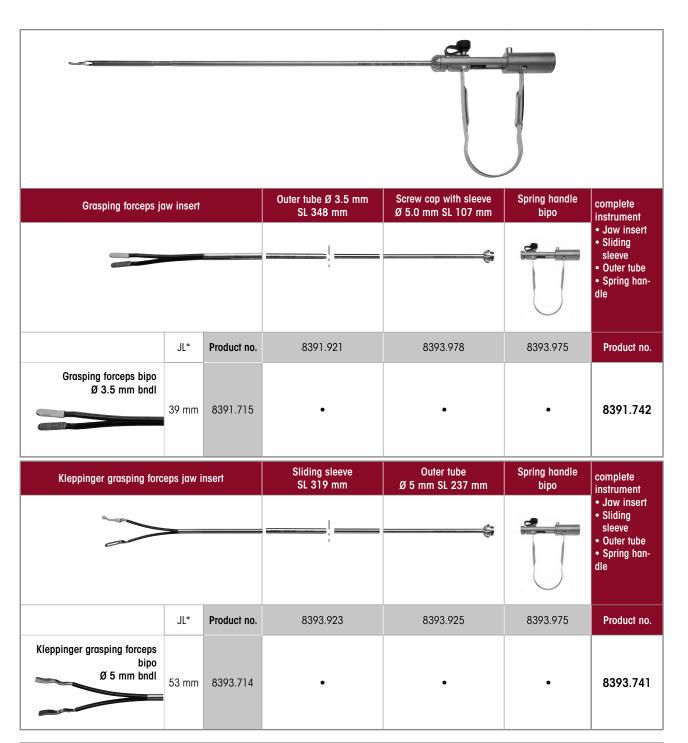


Accessories	Product no.
RIWO rubber cap, jet black	15220.019
Luer sealing cap	15023.153

 $^{^{*}}$ JL = jaw length when jaw section closed (approximate measurements) Bipolar connection cable: see sheet GYN116/117



ERAGON bipolar

MODULAR BIPOLAR INSTRUMENTS, 5.5 MM ROTATABLE

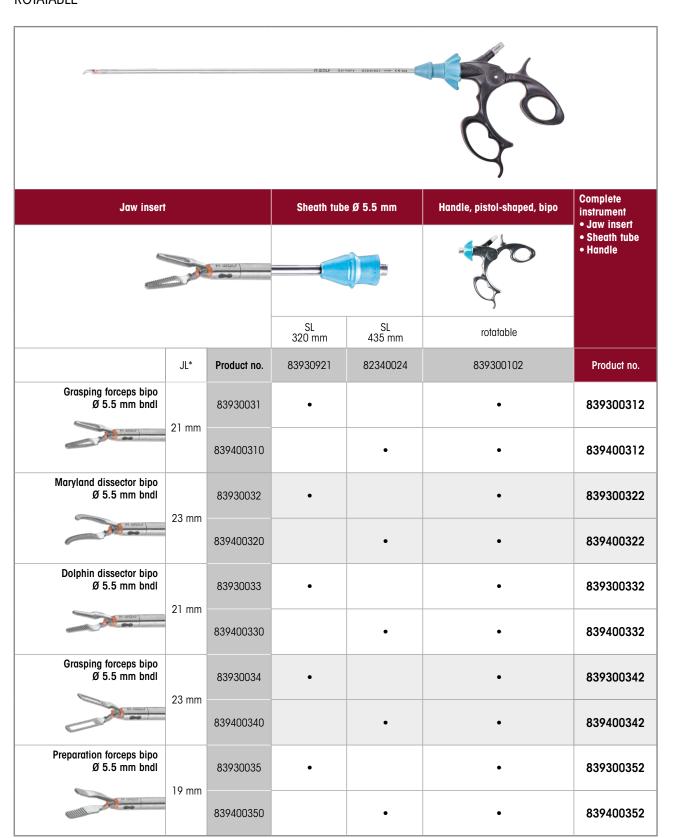


 $^{^{*}}$ JL = jaw length when jaw section closed (approximate measurements) Bipolar connection cable: see sheet GYN116/117



||24||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

ERAGON bipolar

MODULAR BIPOLAR INSTRUMENTS, 5.5 MM, ROTATABLE

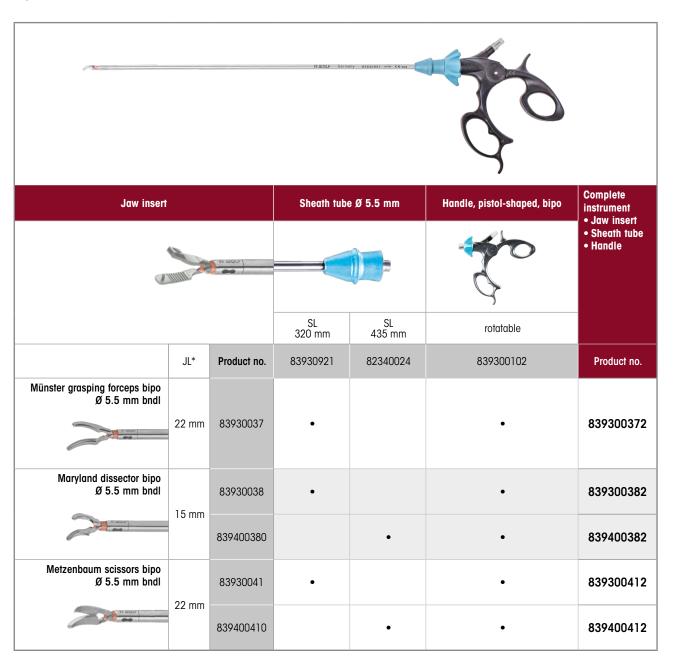

 $^{^{*}}$ JL = jaw length when jaw section closed (approximate measurements) Bipolar connection cable: see sheet GYN116/117



ELECTRODES 2.0 MM/3.5 MM

MONOPOLAR

			R.WOLF 823.94
	Outer Ø	WL	Product no.
Coagulation electrode mono 5 Fr WL 400 mm	1.67 mm	400 mm	823.05
Coagulation electrode mono 6 Fr WL 400 mm	2.0 mm	400 mm	823.06


			5379.452
	Outer Ø	WL	Product no.
Hook electrode mono Ø 3.5 mm WL 310 mm	3.5 mm	310 mm	8379.452
Hook electrode mono Ø 3.5 mm WL 240 mm with distally extended insulation	3.5 mm	240 mm	8785.642
Needle electrode mono Ø 3.5 mm WL 310 mm	3.5 mm	310 mm	8379.482
Coagulation electrode mono Ø 3.5 mm WL 310 mm	3.5 mm	310 mm	8379.462



||24||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

ELECTRODES 5.0 MM

MONOPOLAR

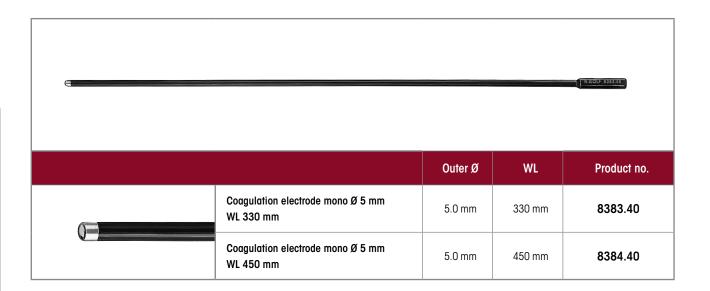


	(8383.423)		
	Outer Ø	WL	Product no.
Hook electrode mono Ø 5 mm WL 340 mm	- 5.0 mm	340 mm	8383.423
Hook electrode mono Ø 5 mm WL 420 mm		420 mm	8384.423
Needle electrode mono Ø 5 mm WL 340 mm	5.0 mm	340 mm	8383.426
Spatula electrode mono Ø 5 mm WL 340 mm	5.0 mm	340 mm	8383.428
Myoma dissector mono Ø 5 mm WL 340 mm	5.0 mm	340 mm	8383429



MULTIFUNCTIONAL SUCTION IRRIGATION SYSTEM

COMBINATION OPTIONS

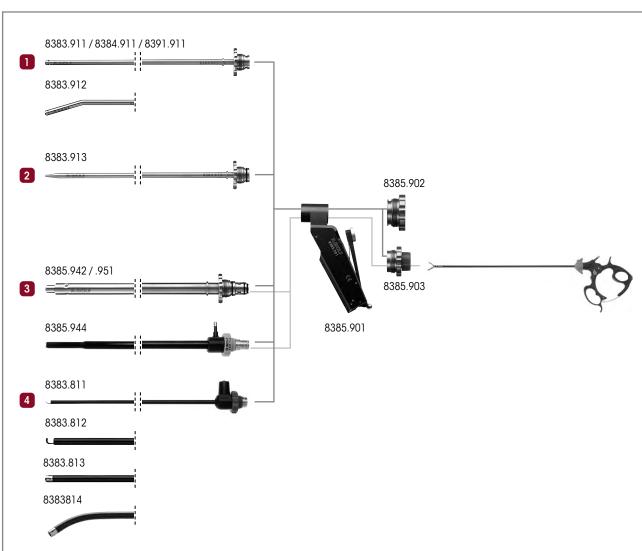

Suction of	r irrigation.

Suction irrigation tube Ø 5 mm WL 310 mm	8383.911
Suction irrigation tube Ø 5 mm WL 450 mm	8384.911
Suction irrigation tube Ø 3.5 mm WL 300 mm	8391.911
Suction irrigation tube curved Ø 5 mm WL 310 mm	8383.912
for this: Sealing cap	8385.902

2 Blunt aquadissection:

Pressure irrigation tube Ø 5 mm WL 310 mm8383.913for this: Sealing cap8385.902

3 Suction, irrigation, and use

of auxiliary instruments Ø 5 mm:

of duxility monuments & 3 mm.			
Suction irrigation tube Ø 10 mm WL 225 mm	8385.942		
Suction irrigation tube Ø 10 mm WL 330 mm	8385951		
Suction irrigation tube Ø mono 10 mm WL 330 mm,			
insulated, with atraumatic preparation tip	8385.944		
for this: Sealing adapter	8385.903		

Preparation of tissue with HF:

HF suction irrigation tube Ø 5.2 mm WL 317 mm	
insulated with integrated HF spatula probe	8383.811
HF suction irrigation tube Ø 5.2 mm WL 317 mm	
insulated with integrated HF hook electrode	8383.812
HF suction irrigation tube Ø 5.2 mm WL 317 mm	
insulated with integrated HF button electrode $\dots\dots$	8383.813
HF suction irrigation tube Ø 5.4 mm WL 380 mm	
curved with distal openings,	
insulated with integrated HF button electrode	8383.814
for this: Sealing cap	8385.902

Spare

Sealing membrane Ø 17 mm

yellow, Ø 17 mm, PACK= 10 PCS, for instruments from 3 to 6 mm



spirit of excellence

MULTIFUNCTIONAL SUCTION IRRIGATION SYSTEM

SUCTION IRRIGATION HANDLE




89.103



MULTIFUNCTIONAL SUCTION IRRIGATION SYSTEM

SUCTION IRRIGATION TUBE SETS - ILLUSTRATION

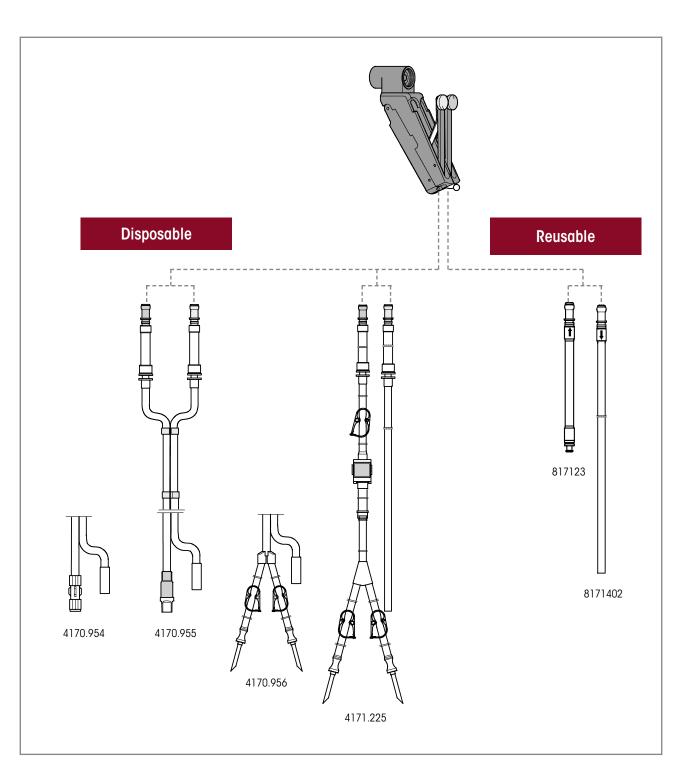

Suction irrigation tube sets are used in conjunction with the suction irrigation handle 8385.901 and pump-side tube systems as well as corresponding collection and secretion containers and/or vacuum pumps.



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

MULTIFUNCTIONAL SUCTION IRRIGATION SYSTEM

SUCTION IRRIGATION TUBE SETS FOR SUCTION IRRIGATION HANDLE 8385.901


Disposable		Product no.	
Suction irrigation tube set, L 3 m (PACK= 10 PCS), sterile	Irrigation tube: With Luer-Lock, for connection to the irrigation tube of a suction irrigation tube set, e.g., irrigation tube of the Endo-Irrigator 2211 Suction tube: For connection to a collection or secretion container and/or vacuum pump		
Suction irrigation tube set with care-lock, L 3 m (PACK= 10 PCS), sterile	Irrigation tube: With CARE-LOCK, for connection to an irrigation container Suction tube: For connection to a collection or secretion container and/or vacuum pump	4170.955	
Suction irrigation tube set with piercing spike, L 3 m (PACK= 10 PCS), sterile	Irrigation tube: With 2 piercing spikes, for connection to an irrigation container Suction tube: For connection to a collection or secretion container and/or vacuum pump	4170.956	
Suction irrigation tube set, L 3 m (PACK= 10 PCS), sterile	Irrigation tube: With 2 piercing spikes, for connection to an irrigation container, and Fluid Control Lap 2216 Suction tube: For connection to a collection or secretion container and/or vacuum pump Also observe instruction manual GA-A 276	4171.225	
Secretion container, 2.5 I	2.5 liters	41706566	
Tube set for suction (2 connections)	sterile disposable product (PACK= 10 PCS), for connecting instruments to collecting container	T0503-01	

Reusable		Product no.
Irrigation tube L 1.2 m	Irrigation tube: With Luer-Lockconnection for connection to the irrigation tube of a suction irrigation tube set, e.g., 8171223 or 8170.223	817123
Suction tube L 3 m	silicone, for suction irrigation handle 8385.901	8171402
Secretion container, 2 I	2 liters, without cover	8170.6551
Cover	for secretion trap 8170.6551, reusable	8170.6552




MULTIFUNCTIONAL SUCTION IRRIGATION SYSTEM

SUCTION IRRIGATION TUBES

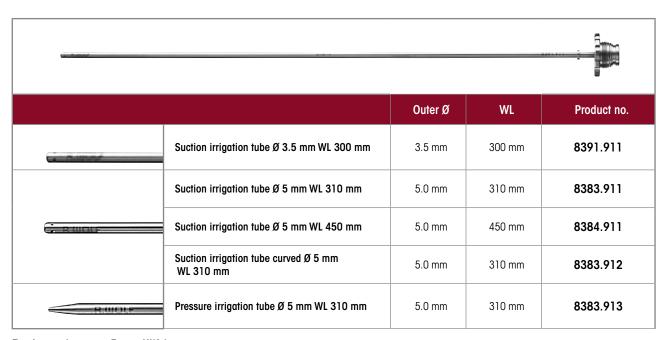

Zur Anwendung von 5 mm Hilfsinstrumenten

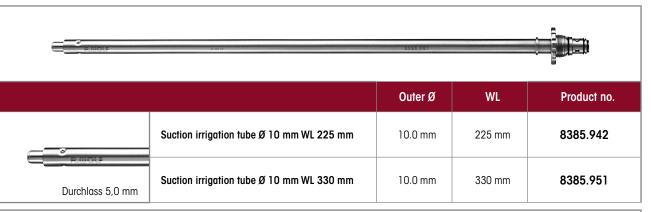

				Town or the state of the state
		Outer Ø	WL	Product no.
isoliert, mit atraumatischer Präparierspitze	Saug-Spül-Rohr mono Ø 10 mm NL 330 mm	10,0 mm	330 mm	8385.944


for use of 5 mm auxiliary instrur	Product no.	
	Dichtaufsatz mit Durchgang und Membranventil Dichtmembrane Ø 17 mm	8385.903



||24||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

MULTIFUNCTIONAL SUCTION IRRIGATION SYSTEM

SUCTION IRRIGATION TUBES

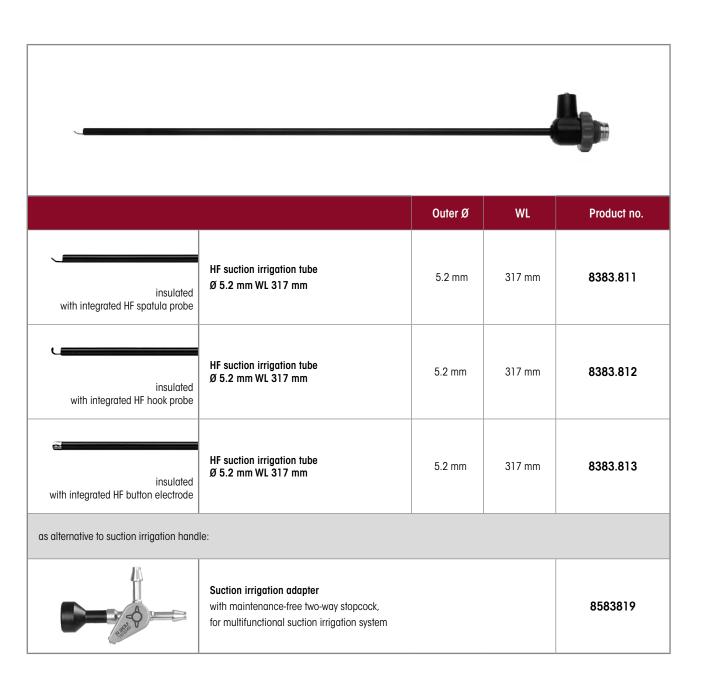



Accessories	Product no.
HF connection cable	see page GYN114/115




MULTIFUNCTIONAL SUCTION IRRIGATION SYSTEM

SUCTION IRRIGATION TUBES

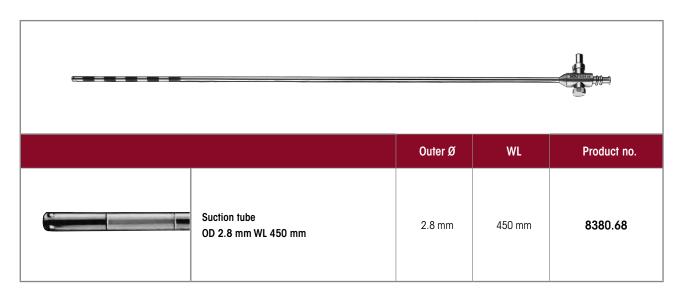


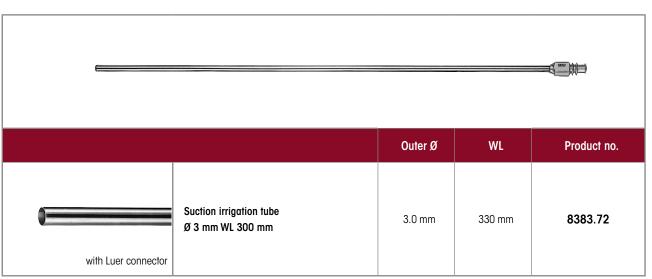

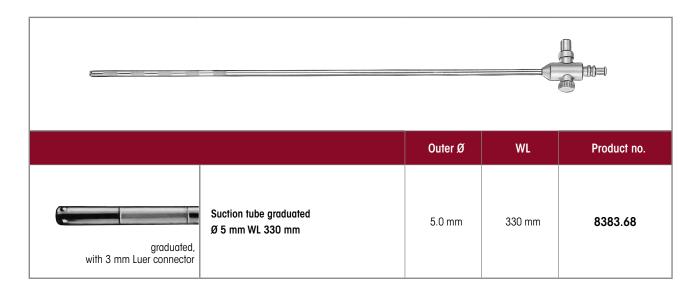


ACCESSORIES

FOR SUCTION AND IRRIGATION



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

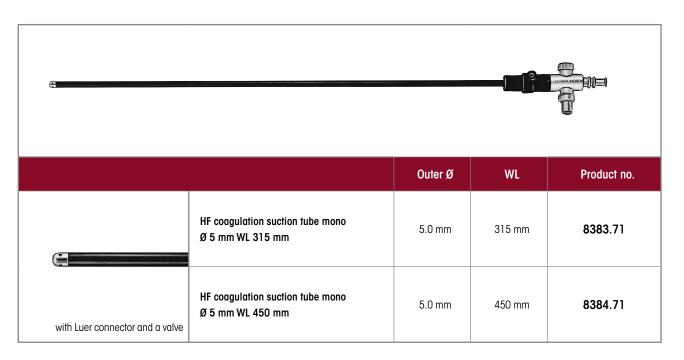




Accessories	Product no.
HF connection cable	See page BDE116/117

ACCESSORIES


||24||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

FOR SUCTION AND IRRIGATION

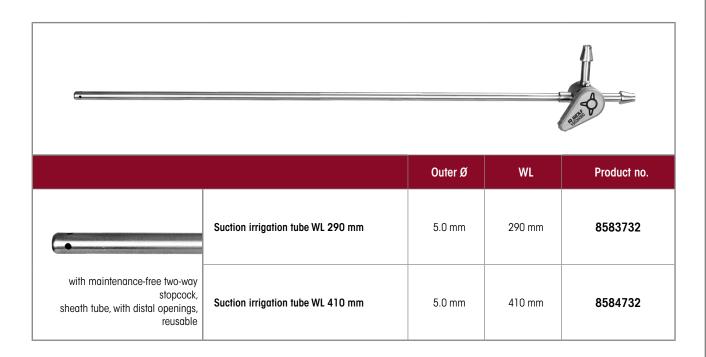

||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.


TISSUE RETRACTOR 5 MM

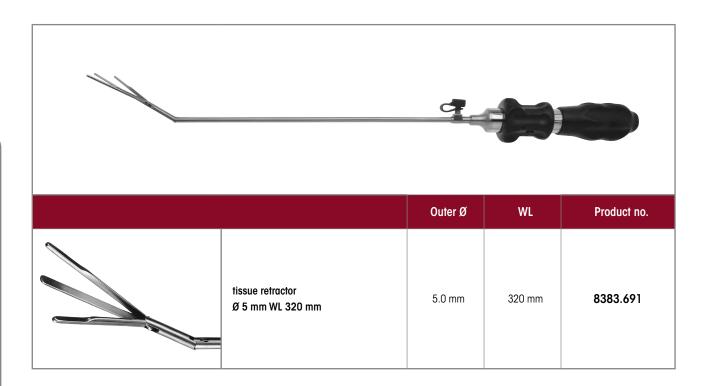

Accessories	Product no.
Luer sealing cap	887.00

CLIP APPLICATOR 10 MM

FOR SUCTION AND IRRIGATION

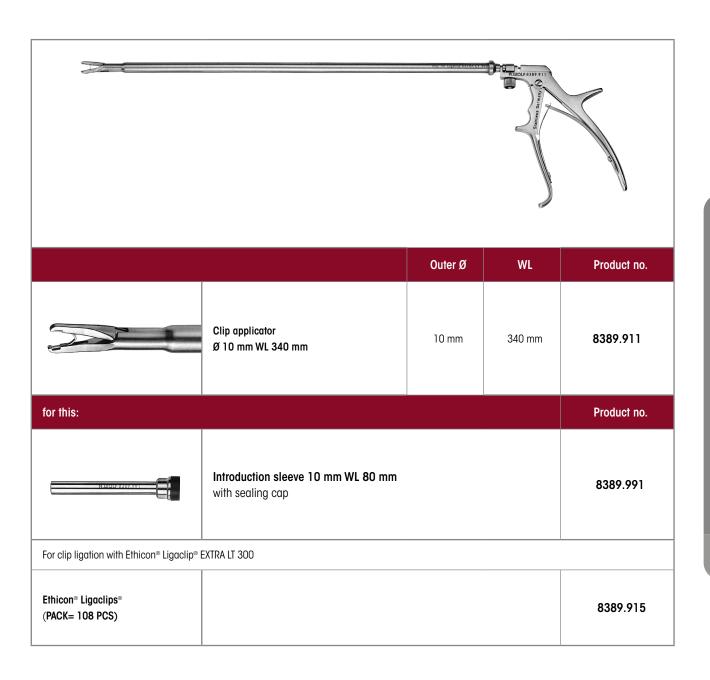


Accessories	Product no.
Sealing cap capacity 9.5–10.1 mm	89.08





THE ERGONOMIC GENERATION OF NEEDLE HOLDERS


Thanks to the custom combination options it offers, **ERAGONstitch** can accommodate any user requirement. The way in which it brings together ergonomics, versatility, modularity, and precision sets new standards in comfort

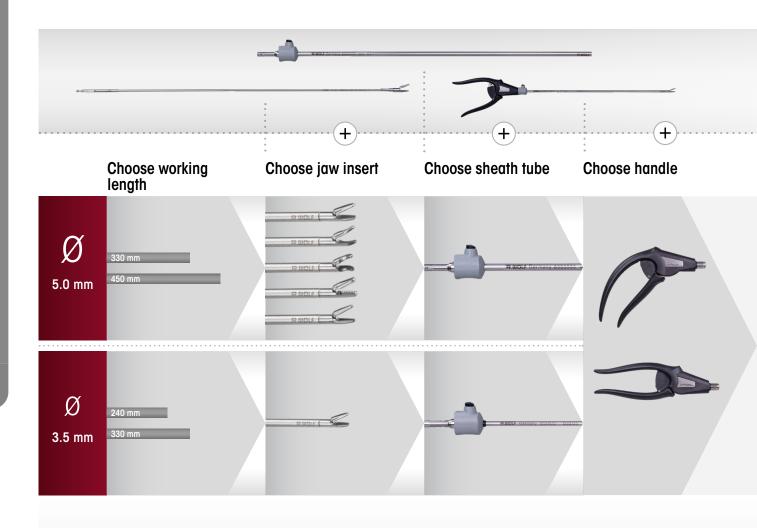





ERAGON stitch NEEDLE HOLDER Ø 3.5 MM

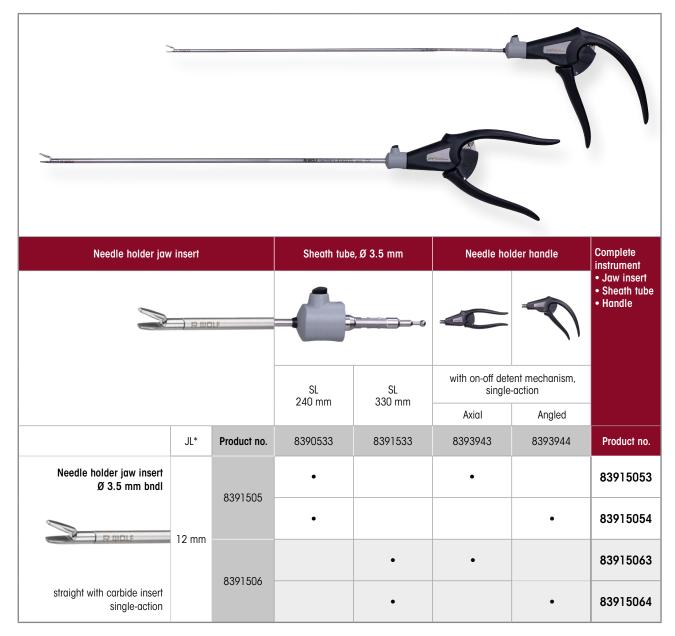

^{*} JL = jaw length when jaw section closed (approximate measurements)

Accessories for manual and machine reprocessing	Product no.	
	Irrigation adapter cleaning Ø 9 mm, length 64 mm for uninsulated sheath tubes	163503



ERAGON stitch NEEDLE HOLDER Ø 5.0 MM

Needle holder jav	v insert		Sheath tub	e, Ø 5.0 mm	Needle ho	Needle holder handle	
RUDLE							Jaw insertSheath tubeHandle
			SL 330 mm	SL 450 mm	with on-off det single	ent mechanism,	
	ı		330 111111	450 11111	axial	angled	
	JL*	Product no.	8393533	8394533	8393943	8393944	Product no.
Needle holder Ø 5 mm bndl		8393507	•		•		83935073
R.MOLE	10 mm	0373007	•			•	83935074
	19 mm	0204507		•	•		83945073
straight with carbide insert single-action		8394507		•		•	83945074
Needle holder Ø 5 mm bndl			•		•		83935083
		8393508	•			•	83935084
R MOLE	19 mm			•	•		83945083
straight and narrow with carbide insert single-action		8394508		•		•	83945084
Needle holder jaw insert Ø 5 mm bndl		0202500	•		•		83935093
	19 mm	8393509	٠			•	83935094
straight,		0004500		•	•		83945093
with self-righting function single-action		8394509		•		•	83945094

^{*} JL = jaw length when jaw section closed (approximate measurements)

Accessories for manual and machine reprocessing	Product no.	
	Irrigation adapter cleaning Ø 9 mm, length 64 mm for uninsulated sheath tubes	163503



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

ERAGON stitch NEEDLE HOLDER Ø 5.0 MM


Needle holder jav	Needle holder jaw insert			e, Ø 5.0 mm	Needle ho	lder handle	Complete instrument Jaw insert Sheath tube Handle
R.more							
			SL 330 mm	SL 450 mm	with on-off det single	with on-off detent mechanism, single-action	
			330 111111	430 11111	Axial	Angled	
	JL*	Product no.	8393533	8394533	8393943	8393944	Product no.
Needle holder Ø 5 mm bndl		8393518	•		•		83935183
R.WDLF	19 mm	0070010	•			•	83935184
	1711111	8394518		•	•		83945183
curved right with carbide insert single-action		0071010		•		•	83945184
Needle holder Ø 5 mm bndl		8393519	•		•		83935193
RWDLF	19 mm -	33733.7	•			•	83935194
		8394519		•	•		83945193
Curved left with carbide insert single-action		3074017		•		•	83945194

Accessories for manual and machine reprocessing		Product no.
	Irrigation adapter cleaning Ø 9 mm, length 64 mm for uninsulated sheath tubes	163503



NEEDLE HOLDER Ø 3.5 MM/5 MM

MODULAR SYSTEM

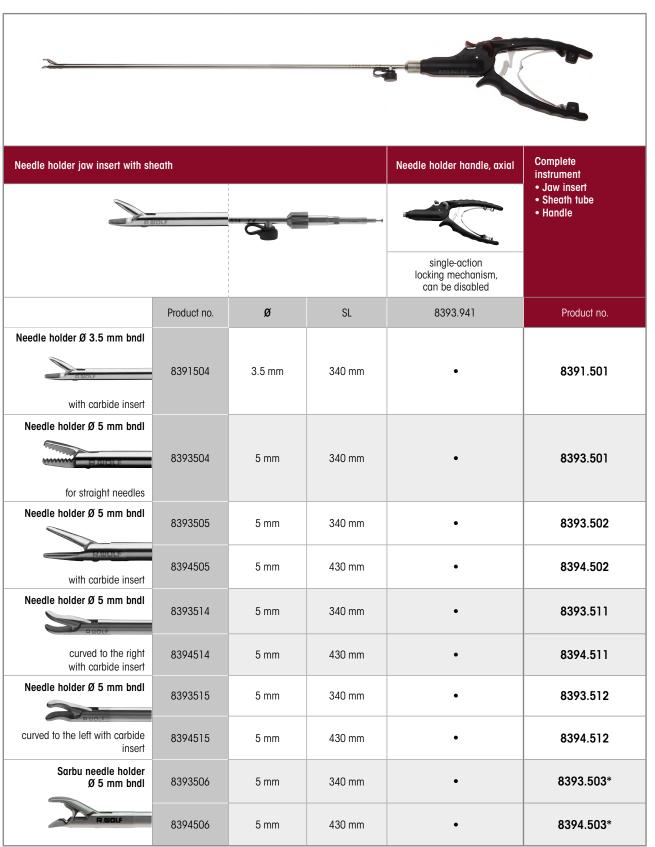

^{*} with automatic needle placement apparatus and cutting edge

||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

NEEDLE HOLDER HANDLE

Needle holder handle, axial	not rotatable	with lock	without HF	Product no.
	•	•	•	8393.941

Needle holder handle ÆRÅGONstitch	axial	angled	with on-off detent mechanism	single-action	Not rotatable	Product no.
	•		•	•	•	8393943
		•	•	•	•	8393944





MODULAR KNOT PUSHER Ø 5.0 MM, INSULATED

		Handle, axial				
ERAGON axial			The state of the s		3	
All jaw inserts and sheath tubes can also be with ERAGONaxial	combined	with lock	without lock, with HF connector	without lock, with HF connector	with lock, not rotatable	
Rotatable knob	Product no.	83930082	83930083	83930084	83930085	
2 P. Marie	8988	•	•	•	•	


Jaw insert		Sheath tube, Ø 5	.0 mm, insulated	Handle	Complete instrument • Jaw insert	
ERAGON modular R.WOLF				3	with sheath tube • Handle	
•	'		SL 330 mm	SL 450 mm	with lock, without HF	
	JL*	Product no.	8393933	8394933	83930072	Product no.
Knot pusher Ø 5 mm bndl	17 mm	8393.345	•		•	83933457
with distal recess, double-action	17 mm	8394345		•	•	83943457

^{*} JL = jaw length when jaw section closed (approximate measurements)
HF connection cable: see sheet GYN114/115



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

KNOT PUSHER 5 MM FOR ENDOSCOPIC SUTURING

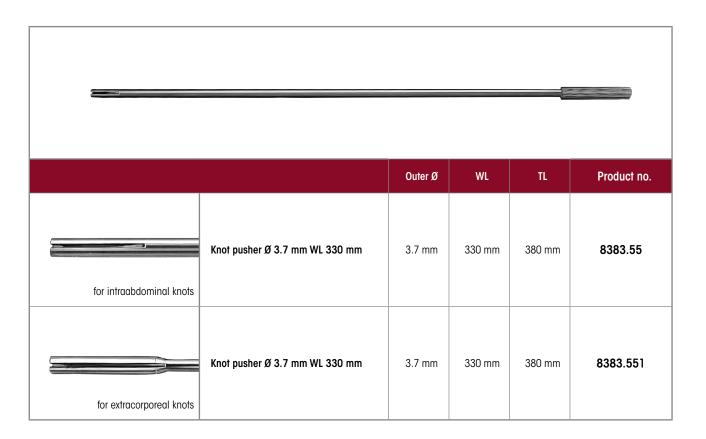


				-	
		Outer Ø	WL	TL	Product no.
with distal notch and lateral opening for optimum knotting, extremely atrau- matic tip for use as a surgical probe	Knot pusher Ø 5 mm WL 330 mm as per Bueß	5.0 mm	330 mm	380 mm	8383.552



ENDOSCOPICALLY CONTROLLED FASCIA CLOSURE SYSTEM


AS PER BUSCHE

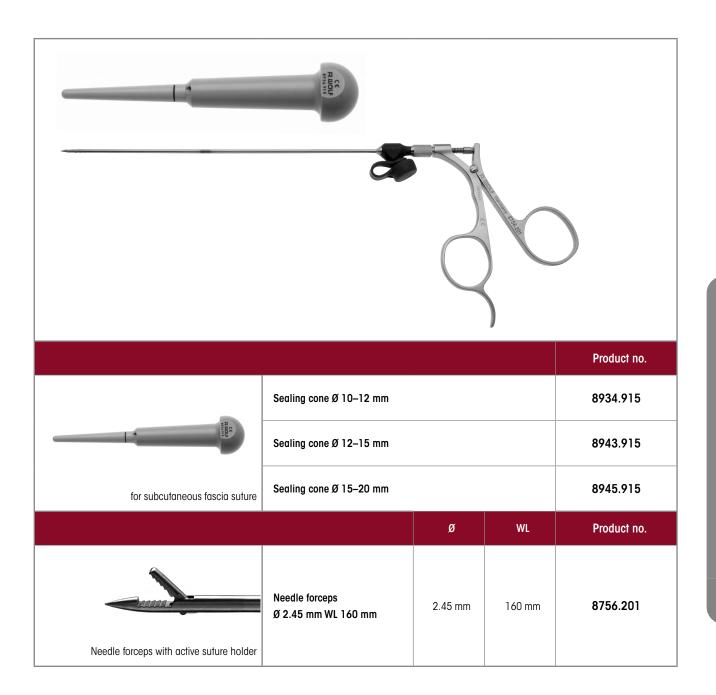


spirit of excellence

||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

CANNULAS 3.0 MM/4.7 MM

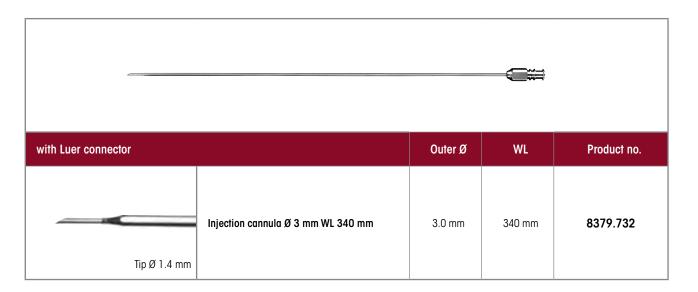

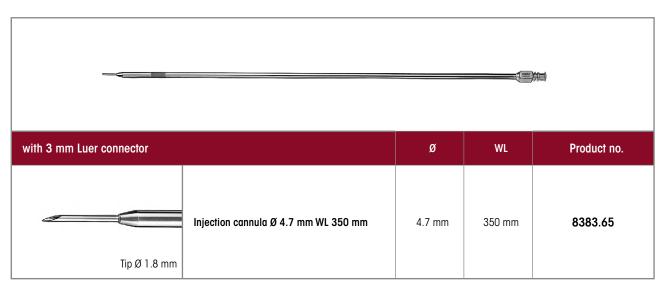

for this:		WL	Product no.
E E	Introduction sleeve size 5.5 mm WL 45 mm This sleeve prevents damage to the cannula tip when the trocar sleeve valve is opened	45 mm	8383.00




SURGICAL PROBES

	Ø	WL	Product no.
Surgical probe 3.5 mm WL 350 mm graduated	3.5 mm	350 mm	8379.672

===				AUGU 1957-66
		Ø	WL	Product no.
	Surgical probe Ø 5 mm WL 328 mm graduated	5.0 mm	328 mm	8383.66
	Surgical probe Ø 5 mm WL 448 mm graduated	5.0 mm	448 mm	8384.66

||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

MYOMA DRILL 5 MM/10 MM

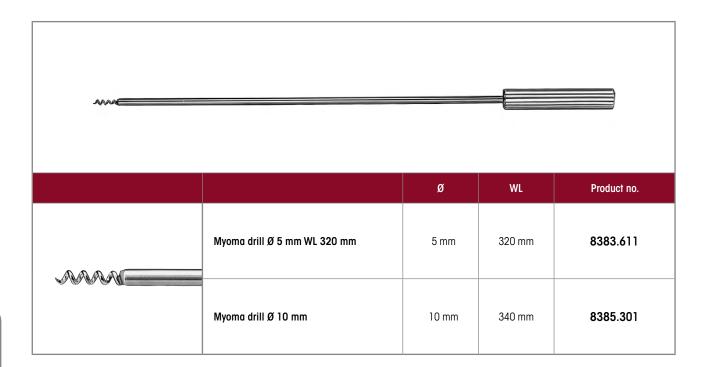

INSUFFLATOR HIGHFLOW 45 BASIC



		Product no.
Insufflator 45 BASIC bndl consisting of: Insufflator 45 BASIC FR 45 I/min (2235001) and power cable 3 m long (2440.03)		22350012
Accessories: Tube sets for insufflation		
Insufflation set, insufflation tube with integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, disposable, (PACK= 10 PCS) in individual integrated hygiene filter, dispos	dual sterile packaging	2200/48BIKBTUA123
Insufflation tube set L 2.5 m, High Flow, D = 8 mm, autoclavable		8170.232
Insufflation tube set L 2.5 m, autoclavable		8170.101
Hygiene filter, sterile, disposable (PACK= 10 PCS) in individual sterile packaging		4171.111
Accessories for gas supply CO ₂ bottle		
Qualityreg CO ₂ , Inlet pressure connection DIN ISO 477-6 outlet connection NIST, pressure gauge Flow meter	DIN ISO 477-6	DM-DIN6-MS-NISTCO2
Qualityreg CO ₂ , Inlet connection DIN EN ISO 407 PIN INDEX, outlet connection NIST ,pressure gauge Flow meter	DIN EN ISO 407 PIN INDEX	DM-PIN-MS-NIST-CO2
Qualityreg CO ₂ , Inlet connection ISO 5145 outlet connection NIST, pressure gauge Flow meter	ISO 5145	DM-ISO-MS-NIST-CO2
with		
Connection hose, quality CONNECT, CO ₂ 1.5 m long	DINCO2NIST-NIST1.5	
Optional for faster CO ₂ bottle changes		
Quick plug adapter NIST, (2 pieces recommended) DIN with safety chain, adapter NIST / coupling	DM-AD-CO2NISTDINKU	
Connection hose DIN, CO ₂ , ZGV plug to NIST fitting, ISO-colored, 1.5 m long (Ceiling light)		DIN-CO2-ZGVNIST1.5
ZGV connection		
$\textbf{Connection hose, quality CONNECT, } \text{CO}_2 \text{5 m long, DIN for centralized } \text{CO}_2 \text{ gas supply (Dräger)}$	RW-CO2-ZGV-NIST5.0	
Connection hose, quality CONNECT, CO ₂ 5 m long, NF for centralized CO ₂ gas supply (Liquid Air)	NF-CO2-ZGV-NIST5.0	
Connection hose DIN, CO ₂ , ZGV plug to NIST fitting, ISO-colored, 1.5 m long (Ceiling light)	DIN-CO2-ZGVNIST1.5	
Software modules (optional)		
Software module CAN bus CAN bus interface for integration in CORE	2235101	
Software module BABY MODE BABY MODE for special use in pediatrics		2235102
Software module VIDEO DISPLAY: video display using DIALOG via CAN bus		2235103



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

TECHNICAL DATA INSUFFLATOR HIGHFLOW 45 BASIC

Insufflator 45 BASIC	2235001
Device properties	
Operating mode	Continuous operation
Operating conditions	+10°C to +40°C, 30% to 75% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa
Storage and transport conditions	-20°C to +60°C, 10% to 90% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa
Power supply	
Mains + frequency	100-240 V~, 50/60 Hz
Power consumption	60 VA
Current rating	0.6-0.2 A
Fuse	T 3.15 AH 250 V
Regulatory standards	
Protection class to IEC/EN 60601-1 (UL 60601-1/CSA C222 No6011 – for USA)	I
Electromagnetic compatibility (EMC)	IEC/EN 60601-1-2
Medical Devices Directive 93/42/EEC	Class IIb
Protection against electric shock	Type CF applied part
Degree of protection against the ingress of liquids	IP 20 (not protected)
Degree of protection in the presence of flammable mixtures	Device is not protected against explosions (do not operate this device in explosive atmospheres)
Dimensions and weights	
Weight	8.9 kg (19.5 lbs)
Dimensions (W x H x D)	300 mm x 160 mm x 455 mm

Relevant application parameters		
Insufflation medium	Medical-grade CO ₂ (degree of purity > 99.5%)	
Intraabdominal pressure	3 mmHg to 25 mmHg (± 2 mmHg) selectable in increments of 1 mmHg	
Gas flow rate primary filling	1 I/min (± 50%)	
Gas flow rate, High Flow	2 I/min to 45 I/min (± 20%) selectable in increments of 1 I/min	
Consumption indicator	0 to 9,999 (± 20%)	



INSUFFLATOR HIGHFLOW 45 EVAC

WITH SMOKE GAS EVACUATION



		Product no.
Insufflator 45 EVAC bndI consisting of: Insufflator 45 EVAC FR 45 I/min (2235011), power cable, 3 m long (2440.03) and footswitch with 1 pedal (20301031)	22350112	
Accessories: Tube sets for insufflation and smoke gas evacuation		
Insufflation set, insufflation tube with integrated hygiene filter, disposable, (PACK= 10 PCS) in indicate the property of the property o	vidual sterile packaging	2200/48BIKBTUA123
Insufflation tube set L $2.5\ \mathbf{m}$, High Flow, D = $8\ \mathbf{mm}$, autoclavable		8170.232
Insufflation tube set L 2.5 m, autoclavable		8170.101
Hygiene filter, sterile, disposable (PACK= 10 PCS) in individual sterile packaging		4171.111
Smoke gas evacuation tube set, steril, sterile, for single use (PACK= 10 PCS)		2200/72BTUA123000
Accessories for gas supply CO ₂ bottle		
Qualityreg CO ₂ , Inlet pressure connection DIN ISO 477-6 outlet connection NIST, pressure gauge Flow meter	DIN ISO 477-6	DM-DIN6-MS-NISTCO
Qualityreg CO ₂ , Inlet connection DIN EN ISO 407 PIN INDEX, outlet connection NIST ,pressure gauge Flow meter	DIN EN ISO 407 PIN INDEX	DM-PIN-MS-NIST-CO2
Qualityreg CO ₂ , Inlet connection ISO 5145 outlet connection NIST, pressure gauge Flow meter		DM-ISO-MS-NIST-CO2
with		
Connection hose, quality CONNECT, CO ₂ 1.5 m long		DINCO2NIST-NIST1.5
Optional for faster CO ₂ bottle changes		
Quick plug adapter NIST, (2 pieces recommended) DIN with safety chain, adapter NIST / coupling	y with chain and ring	DM-AD-CO2NISTDINK
Connection hose DIN, CO ₂ , ZGV plug to NIST fitting, ISO-colored, 1.5 m long (Ceiling light)		DIN-CO2-ZGVNIST1.5
ZGV connection		
$\textbf{Connection hose, quality CONNECT, } \text{CO}_2 \text{ 5 m long, DIN for centralized } \text{CO}_2 \text{ gas supply (Dräger)}$		RW-CO2-ZGV-NIST5.0
$\textbf{Connection hose, quality CONNECT, } \text{CO}_2 \text{5 m long, NF for centralized CO}_2 \text{ gas supply (Liquid Air)}$	NF-CO2-ZGV-NIST5.0	
Connection hose DIN, CO ₂ , ZGV plug to NIST fitting, ISO-colored, 1.5 m long (Ceiling light)	DIN-CO2-ZGVNIST1.5	
Software modules (optional)		
Software module CAN bus CAN bus interface for integration in CORE		2235101
Software module BABY MODE BABY MODE for special use in pediatrics		2235102
Software module VIDEO DISPLAY: video display using DIALOG via CAN bus		2235103

||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

TECHNICAL DATA

INSUFFLATOR HIGHFLOW 45 EVAC

Insufflator 45 EVAC	2235011
Device properties	
Operating mode	Continuous operation
Operating conditions	+10°C to +40°C, 30% to 75% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa
Storage and transport conditions	-20°C to +60°C, 10% to 90% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa
Power supply	
Mains + frequency	100–240 V~, 50/60 Hz
Power consumption	60 VA
Current rating	0.6-0.2 A
Fuse	T 3.15 AH 250 V
Regulatory standards	
Protection class to IEC/EN 60601-1 (UL 60601-1/CSA C222 No6011 – for USA)	
Electromagnetic compatibility (EMC)	IEC/EN 60601-1-2
Medical Devices Directive 93/42/EEC	Class IIb
Protection against electric shock	Type CF applied part
Degree of protection against the ingress of liquids	IP 20 (not protected)
Degree of protection in the presence of flammable mixtures	Device is not protected against explosions (do not operate this device in explosive atmospheres)
Dimensions and weights	
Weight	8.9 kg (19.5 lbs)
Dimensions (W x H x D)	300 mm x 160 mm x 455 mm

Relevant application parameters		
Insufflation medium	Medical-grade CO ₂ (degree of purity > 99.5%)	
Intraabdominal pressure	3 mmHg to 25 mmHg (± 2 mmHg) selectable in increments of 1 mmHg	
Gas flow rate primary filling	1 I/min (± 50%)	
Gas flow rate, High Flow	2 I/min to 45 I/min (± 20%) selectable in increments of 1 I/min	
Consumption indicator	0 to 9,999 (± 20%)	



INSUFFLATOR HIGHFLOW 45 HEAT

WITH GAS HEATING



	ļ	Product no.
Insufflator 45 HEAT bndI consisting of: Insufflator 45 HEAT FR 45 L/min(2235021) and power cable, 3 m long (2440.03)		22350212
Accessories: Tube sets for insufflation with heating		
Insufflation tube set L 3m high-flow with heating coil and integrated hygiene filter, (PACK=10 PCS) sterile, for single use),	4170502
Insufflation tube for 2235021/031 L 3m , high-flow with heating coil, autoclavable Up to 100 uses are possible with the reusable hose.		8170202
Hygiene filter, sterile, disposable (PACK= 10 PCS) in individual sterile packaging		4171.111
Accessories for gas supply CO ₂ bottle		
Qualityreg CO₂ , Inlet pressure connection DIN ISO 477-6 outlet connection NIST, pressure gauge Flow meter	DIN ISO 477-6	DM-DIN6-MS-NISTCO2
Qualityreg CO ₂ , Inlet connection DIN EN ISO 407 PIN INDEX, outlet connection NIST ,pressure gauge Flow meter	DIN EN ISO 407 PIN INDEX	DM-PIN-MS-NIST-CO2
Qualityreg CO ₂ , Inlet connection ISO 5145 outlet connection NIST, pressure gauge Flow meter	DM-ISO-MS-NIST-CO2	
with		
Connection hose, quality CONNECT, CO ₂ 1.5 m long		DINCO2NIST-NIST1.5
Optional for faster CO ₂ bottle changes		
Quick plug adapter NIST, (2 pieces recommended) DIN with safety chain, adapter NIST / coupling	with chain and ring	DM-AD-CO2NISTDINK
Connection hose DIN, CO ₂ , ZGV plug to NIST fitting, ISO-colored, 1.5 m long (Ceiling light)		DIN-CO2-ZGVNIST1.5
ZGV connection		
Connection hose, quality CONNECT, CO ₂ 5 m long, DIN for centralized CO ₂ gas supply (Dräger)		RW-CO2-ZGV-NIST5.0
Connection hose, quality CONNECT, CO ₂ 5 m long, NF for centralized CO ₂ gas supply (Liquid Air)		NF-CO2-ZGV-NIST5.0
Connection hose DIN, CO ₂ , ZGV plug to NIST fitting, ISO-colored, 1.5 m long (Ceiling light)		DIN-CO2-ZGVNIST1.5
Software modules (optional)		
Software module CAN bus CAN bus interface for integration in CORE		2235101
Software module BABY MODE BABY MODE for special use in pediatrics		2235102
Software module VIDEO DISPLAY: video display using DIALOG via CAN bus		2235103



TECHNICAL DATA

INSUFFLATOR HIGHFLOW 45 HEAT

Insufflator 45 HEAT	2235021
Device properties	
Operating mode	Continuous operation
Operating conditions	$+10^{\circ}\text{C}$ to $+40^{\circ}\text{C}$, 30% to 75% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa
Storage and transport conditions	-20°C to +60°C, 10% to 90% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa
Power supply	
Mains + frequency	100-127/220-240 V~, 50/60 Hz
Power consumption	80 VA
Current rating	0.8-0.3 A
Fuse	T 3.15 AH 250 V
Regulatory standards	
Protection class to IEC/EN 60601-1 (UL 60601-1/CSA C222 No6011 – for USA)	I
Electromagnetic compatibility (EMC)	IEC/EN 60601-1-2
Medical Devices Directive 93/42/EEC	Class IIb
Protection against electric shock	Type CF applied part
Degree of protection against the ingress of liquids	IP 20 (not protected)
Degree of protection in the presence of flammable mixtures	Device is not protected against explosions (do not operate this device in explosive atmospheres)
Dimensions and weights	
Weight	11.0 kg (23.3 lbs)
Dimensions (W x H x D)	300 mm x 160 mm x 455 mm

Relevant application parameters	
Insufflation medium	Medical-grade CO ₂ (degree of purity > 99.5%)
Intraabdominal pressure	3 mmHg to 25 mmHg (± 2 mmHg) selectable in increments of 1 mmHg
Gas flow rate primary filling	1 l/min (± 50%)
Gas flow rate, High Flow	2 I/min to 45 I/min (± 20%) selectable in increments of 1 I/min
Consumption indicator	0 to 9,999 (± 20%)



INSUFFLATOR HIGHFLOW 45 EVAC + HEAT

WITH SMOKE GAS EVACUATION AND GAS HEATING



		Artikel-Nr.
Insufflator 45 EVAC + HEAT bndl consisting of: Insufflator 45 EVAC + HEAT FR 45 I/min(2235031), power cable, 3 m long (2440.0 and footswitch with 1 pedal (20301031)	22350312	
Accessories: Tube sets for insufflation with heating and smoke gas evacuation		
Insufflation tube set L 3m high-flow with heating coil and integrated hygiene filter, (PACK=10 PC sterile, for single use	S),	4170502
Insufflation tube for 2235021/031 L 3m, high-flow with heating coil, autoclavable Up to 100 uses are possible with the reusable hose.		8170202
Hygiene filter, sterile, disposable (PACK= 10 PCS) in individual sterile packaging		4171.111
Smoke gas evacuation tube set, steril, sterile, for single use (PACK= 10 PCS)		2200/72BTUA123000
Accessories for gas supply CO ₂ bottle		
Qualityreg CO ₂ , Inlet pressure connection DIN ISO 477-6 outlet connection NIST, pressure gauge Flow meter	DIN ISO 477-6	DM-DIN6-MS-NISTCO2
Qualityreg CO ₂ , Inlet connection DIN EN ISO 407 PIN INDEX, outlet connection NIST ,pressure gauge Flow meter	DM-PIN-MS-NIST-CO2	
Qualityreg CO ₂ , Inlet connection ISO 5145 outlet connection NIST, pressure gauge Flow meter	ISO 5145	DM-ISO-MS-NIST-CO2
with		
Connection hose, quality CONNECT, ${\rm CO_2}$ 1.5 m long	DINCO2NIST-NIST1.5	
Optional for faster CO ₂ bottle changes		
Quick plug adapter NIST, (2 pieces recommended) DIN with safety chain, adapter NIST / coupling	g with chain and ring	DM-AD-CO2NISTDINK
$\textbf{Connection hose DIN, CO}_{\textbf{2}}, \text{ ZGV plug to NIST fitting, ISO-colored, 1.5 m long (Ceiling light)}$		DIN-CO2-ZGVNIST1.5
ZGV connection		
$\textbf{Connection hose, quality CONNECT, } \text{CO}_2 \text{ 5 m long, DIN for centralized } \text{CO}_2 \text{ gas supply (Dräger)}$		RW-CO2-ZGV-NIST5.0
$\textbf{Connection hose, quality CONNECT, } \text{CO}_2 \text{ 5 m long, NF for centralized } \text{CO}_2 \text{ gas supply (Liquid Air)}$	NF-CO2-ZGV-NIST5.0	
Connection hose DIN, CO ₂ , ZGV plug to NIST fitting, ISO-colored, 1.5 m long (Ceiling light)	DIN-CO2-ZGVNIST1.5	
Software modules (optional)		
Software module CAN bus CAN bus interface for integration in CORE	2235101	
Software module BABY MODE BABY MODE for special use in pediatrics	2235102	
Software module VIDEO DISPLAY: video display using DIALOG via CAN bus	2235103	



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

TECHNICAL DATA

INSUFFLATOR HIGHFLOW 45 EVAC + HEAT

Insufflator 45 EVAC + HEAT	2235031	
Device properties		
Operating mode	Continuous operation	
Operating conditions	+10°C to +40°C, 30% to 75% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa	
Storage and transport conditions	-20°C to +60°C, 10% to 90% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa	
Power supply		
Mains + frequency	100–127/220–240 V~, 50/60 Hz	
Power consumption	80 VA	
Current rating	0.8-0.3 A	
Fuse	T 3.15 AH 250 V	
Regulatory standards		
Protection class to IEC/EN 60601-1 (UL 60601-1/CSA C222 No6011 – for USA)		
Electromagnetic compatibility (EMC)	IEC/EN 60601-1-2	
Medical Devices Directive 93/42/EEC	Class IIb	
Protection against electric shock	Type CF applied part	
Degree of protection against the ingress of liquids	IP 20 (not protected)	
Degree of protection in the presence of flammable mixtures	Device is not protected against explosions (do not operate this device in explosive atmospheres)	
Dimensions and weights		
Weight	11.0 kg (23.3 lbs)	
Dimensions (W x H x D)	300 x 160 x 455 mm	

Relevant application parameters		
Insufflation medium	Medical-grade CO ₂ (degree of purity > 99.5%)	
Intraabdominal pressure	3 mmHg to 25 mmHg (± 2 mmHg) selectable in increments of 1 mmHg	
Gas flow rate primary filling	1 I/min (± 50%)	
Gas flow rate, High Flow	2 I/min to 45 I/min (± 20%) selectable in increments of 1 I/min	
Consumption indicator	0 I to 9,999 I (± 20%)	



STERILE SMOKE SET

FOR SMOKE GAS DISCHARGE





FLUID CONTROL 2225

SUCTION IRRIGATION PUMP



Accessories		Product no.
Footswitch	only for use in urology and within the indication TUR/enucleation, possibility of short-term increase in pressure if visibility is poor (Flush function)	2204901

FLUID CONTROL 2225

SUCTION IRRIGATION TUBE SETS

Irrigation			Product no.
Accessories – reusable	Tube set with piercing spike	with Luer-Lock connection, autoclavable, incl. 10 spare membranes, reusable for 20 reprocessing cycles	8171223
Accessories – disposable	Irrigation tube set with piercing spike, L 3 m	(PACK= 10 PCS), with Luer-Lock connection, sterile, disposable product	4171223
	Tube set with CARE-LOCK, L 3 m	(PACK= 10 PCS), sterile, disposable product	4171224
	Suction irrigation tube set	(PACK= 10 PCS), with piercing spike, sterile disposable product, PVC	4171225

Suction			Product no.
	Tube set for vacuum, incl. filter	with integrated hygiene filter, PACK= 10 PCS, service life: 30 days (connected to irrigation pump)	2206207
	Irrigation tube	L 1.2 m, with Luer-Lock, for suction irrigation handle 8385.901 and tube set 8171223 or 8170.223	817123
Accessories – reusable	Suction tube L 3 m	for suction irrigation handle 8385.901	8171402
	Secretion container, 2 I	2 liters, without cover	8170.6551
	Cover	for secretion trap 8170.6551, reusable	8170.6552
	Secretion container, 2.5 I	2.5 liters	41706566
Accessories	Secretion container bndl consisting of:	Secretion container 2.5 I (41706566) and secretion bag (PACK= 90 PCS) (41706564)	4170657
– disposable	Tube set for suction (2 connections)	sterile, disposable product, (PACK= 10 PCS) for connecting instruments to collecting container	T0503-01
	Angled 90° plug-in coupling	(PACK= 10 PCS) For connecting vacuum tube 2206207 to disposable container systems	0771019



FLUID CONTROL 2225

CABLE ACCESSORIES

		Product no.
Patch cable, RJ45 SFTP, 0.5 m	Cable length 0.5 m	72325378
Patch cable, RJ45 HRS TM11, 1.0 m	Cable length 1.0 m	72325429
Patch cable, RJ45 S/FTP CAT6 10 m	Cable length 10 m	72325434
Plastic caps for network socket	(PACK= 8 PCS)	5592105
Power cable	Cable length 3 m	2440.03

TECHNICAL DATA FLUID CONTROL 2225

FLUID CONTROL 2225		2225001
Device properties		
Operating conditions		+10°C to +40°C, 30% to 75% rel. humidity, 70 to 106 kPa atmospheric pressure 3,000 m max. altitude above sea level
Storage and transport conditions		-20°C to +60°C , 10% to 90% rel. humidity 70 to 106 kPa atmospheric pressure
Power supply		
Mains + frequency		100–240 V~, 50/60 Hz
Dti	100 V/60 Hz	110 VA
Power consumption	240 V/50 Hz	120 VA
Current rating	100 V/60 Hz	1.10 A
Current rating	240 V/50 Hz	0.50 A
Fuse		T 3.15 AH, 250 V
Regulatory standards		
Protection class (I, II)		ı
Electromagnetic compatibility (EMC)		EN 60601-1/IEC 60601-1 EN 60601-1-2/IEC 60601-1-2
Medical Devices Directive 93/42/EEC		Class IIb
Housing protection rating (IP code)		IP21
Protection against electric shock		Type BF applied part
Degree of protection in the presence of flammable mixtures		Device is not protected against explosions (do not operate this device in explosive atmospheres)
Maximum suction vacuum		-60 kPa
Dimensions and weights		·
Weight		8.8 kg
Dimensions (W x H x D)		300 mm x 157 mm x 436 mm

Relevant application parameters		
	Hysteroscopy: 800 ml/min (max. flow, not adjustable)	
Nominal flow range	Endourology: 10-800 ml/min (max. flow)	
	Laparoscopy: 0.1–1.8 l/min (max. flow)	
Suction power	max. 2 I/min	
	Hysteroscopy: 15–200 mmHg	
Starting nominal pressure range	Endourology: 15–90 mmHg/20–120 cmH2O	
	Laparoscopy: 300 mmHg (not adjustable)	
Pressure	0–300 mmHg	
Deficit	-9,990 to +9,990 ml/0 to 99.9 l	




X22||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

TECHNICAL DATA FLUID CONTROL 2225

Balancing module	2225023			
Device properties				
Operating conditions	+10°C to +40°C, 30% to 75% rel. humidity, 70 to 106 kPa atmospheric pressure 3,000 m max. altitude above sea level			
Storage and transport conditions	-20°C to +60°C , 10% to 90% rel. humidity 70 to 106 kPa atmospheric pressure			
Regulatory standards				
Electromagnetic compatibility (EMC)	EN 60601-1/IEC 60601-1 EN 60601-1-2/IEC 60601-1-2			
Housing protection rating (IP code)	IP21			
Maximum load of container scale	16 kg/4 containers of 3 I each			
Maximum load of bag scale	23 kg/4 bags of 5 I each			
Dimensions and weights				
Weight	15.4 kg			
Dimensions (W x H x D)	618 mm x 1,064 mm x 618 mm			

Footswitch	2204901	
Power supply		
Power supply connection	max. 24 V	
Power consumption	max. 0.1 A	
Regulatory standards		
Electromagnetic compatibility (EMC)	EN 60601-1/IEC 60601-1	
Housing protection rating (IP code)	IPX8	
Plug	7-pin circular connector	
Cable length	4.5 m	
Dimensions and weights		
Weight	300 g	
Dimensions (W x H x D)	66 mm x 27 mm x 91 mm	

FLUID CONTROL LAP 2216

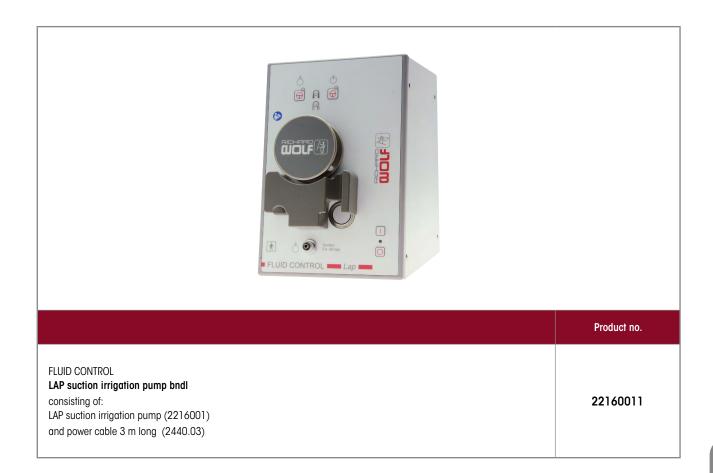

Accessories		Product no.
Bracket	for fixing the suction container on the irrigator stand or MUT cart	2215.992
Universal holder	for FLUID CONTROL LAP on RIWOmobil	32114605



X22||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

LAP SUCTION IRRIGATION PUMP 2216

SUCTION IRRIGATION TUBE SETS

Irrigation			Product no.
Accessories – reusable	Tube set with piercing spike	with Luer-Lock connection, autoclavable, incl. 10 spare membranes, reusable for 20 reprocessing cycles	8171223
	Irrigation tube set with piercing spike, L 3 m	(PACK= 10 PCS), with Luer-Lock connection, sterile, disposable product	4171223
Accessories – disposable	Tube set with CARE-LOCK, L 3 m	(PACK= 10 PCS), sterile, disposable product	4171224
	Suction irrigation tube set	(PACK= 10 PCS), with piercing spike, sterile disposable product, PVC	4171225

Suction			Product no.
	Tube set for vacuum, incl. filter	with integrated hygiene filter, PACK= 10 PCS, service life: 30 days (connected to irrigation pump)	2206207
	Irrigation tube	L 1.2 m, with Luer-Lock, for suction irrigation handle 8385.901 and tube set 8171223 or 8170.223	817123
Accessories - reusable	Suction tube L 3 m	for suction irrigation handle 8385.901	8171402
	Secretion container, 2 I	2 liters, without cover	8170.6551
	Cover	for secretion trap 8170.6551, reusable	8170.6552
Accessories – disposable	Secretion container, 2.5 I	2.5 liters	41706566
	Secretion container bndl consisting of:	Secretion container 2.5 I (41706566) and secretion bag (PACK= 90 PCS) (41706564)	4170657
	Tube set for suction (2 connections)	sterile, disposable product, (PACK= 10 PCS) for connecting instruments to collecting container	T0503-01
	Angled 90° plug-in coupling	(PACK= 10 PCS) For connecting vacuum tube 2206207 to disposable container systems	0771019

15

TECHNICAL DATA FLUID CONTROL LAP 2216



LAP suction irrigation pump		2216001	
Device properties			
Operating conditions		$+10^{\circ}$ C to $+40^{\circ}$ C, 30% to 75% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa 3,000 m max. altitude above sea level	
Storage conditions		$+5^{\circ}\text{C}$ to $+40^{\circ}\text{C}$, 5% to 90% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa	
Transport and shipping co	nditions	-20°C to +60°C, 5% to 90% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa	
Power supply			
Mains + frequency		100-240 V~, 50/60 Hz	
Dec. or a constitution	100 V/60 Hz	65 VA	
Power consumption	240 V/50 Hz	96 VA	
100 V/60 Hz		0.65 A	
Current rating	240 V/50 Hz	0.42 A	
Protection class		1	
Electromagnetic compatib	ility (EMC)	IEC 60601-1/EN 60601-1 IEC 60601-1-2/EN 60601-1-2	
Medical Devices Directive	93/42/EEC	Class IIa	
Protection against electric	shock	Type BF applied part	
Degree of protection again	nst the ingress of liquids	IP 41	
Degree of protection in the presence of flammable mixtures		Device is not protected against explosions (do not operate this device in explosive atmospheres)	
Dimensions and weights			
Weight		4 kg	
Dimensions (W x H x D) with toggle screw		140 mm x 210 mm x 295 mm	

Relevant application parameters	
Maximum delivery rate	Rinsing: 2.0 I/min (± 10%), suction: 2.0 I/min (+0.4/-0.1 I/min)
Maximum pump pressure	400 mmHg (± 50 mmHg)
Motor cut-out	500 mmHg after 5 s (± 25 mmHg)
Suction pressure	between -50 kPa and -60 kPa
Connections	Equipotential bonding, vacuum connection



HF GENERATOR 2260



Accessories required	Cable length	Product no.
Footswitch, 2 pedals L 5 m with fixed connection cable, reusable		2260021
Neutral electrode for use with high-frequency surgical device, Foil bag with 5 neutral electrodes, (PACK= 50 PCS)		1280H
Mono HF neutral electrode cable, L 4.5 m	4.5 m	2260031
Power cable	3.0 m	2440.03
Bipo HF connection cable L 3 m	3.0 m	8108233
Bipo HF connection cable L 5 m	5.0 m	8108253

HF GENERATOR 2260

TECHNICAL DATA

HF surgical generator 40	00kHz	2260001/2260002	
Device properties			
Type of controls on housi	ng front	Touch panel	
max.cutting power		400 W	
Output power	max.coagulation power	350 W	
LF and HF leakage currents		acc. to DIN EN 60601 1 and DIN EN 60601 2 2	
Signal level		HF indicator 55 dB(A); adjustable 45–60 dB(A) Alarm 65 dB(A)	
Operating conditions		+10°C to +40°C, 30% to 75% rel humidity, 700 hPa to 1,060 hPa atmospheric pressure	
Storage and transport co	nditions	- 20°C to + 60°C, 10% to 90% rel humidity, 700 hPa to 1,060 hPa atmospheric pressure	
Power supply			
Mains + frequency		100–240 V~, 50/60 Hz	
Power consumption	without HF output	45 VA	
Power consumption at max. output power		650 VA	
Current rating		max. 6.3 A	
Fuse		T 6.3 AH 250 V	
Regulatory standards			
Protection class to EN/IEG (UL 2601-1/CSA C222 N		I	
Electromagnetic compat	ibility (EMC)	EN/IEC 60601-1-2	
Medical Devices Directive	93/42/EEC	Class IIb	
Degree of protection aga (DIN EN/IEC 60529)	inst the ingress of liquids	IPXO	
Degree of protection aga	inst the ingress of solids	IP2X	
Duty factor (duty cycle D	C)	Intermittent INT 10 s/30 s corresponding to 25% DC	
Protection against electri	c shock	Model CF applied part, defibrillator-proof	
Degree of protection in the presence of flammable mixtures		Device is not protected against explosions (do not operate this device in explosive atmospheres)	
Dimensions and weights	8		
Weight		10.2 kg (22.4 lbs)	
Dimensions (W x H x D)		300 x 159 x 419 mm	



HF CONNECTION CABLE MONO 815xxx

Instrument connector	Device connector		Product no.
WOLF Resectoscopes		HF connection cable mono L 3 m	815.032
	ERBE (ACC/ICC/VIO)/BOWA (EU) R. Wolf HF surgical generator 400 kHz 2260002	HF connection cable mono L 5 m	815.052
0		HF connection cable mono L 3 m	815.132
	ERBE (T series)	HF connection cable mono L 5 m	815.152
HF electrodes,		HF connection cable mono L 3 m	815.031
monopolar	Martin (M-version)/Berchtold/ Aesculap	HF connection cable mono L 5 m	815.051
		HF connection cable mono L 3 m	815.033
	Bovie/Valleylab/Erbe (Int.)/ BOWA (Int.) R. Wolf HF surgical generator 400 kHz 2260001	HF connection cable mono L 5 m	815.053
		HF connection cable mono L 3 m	815.034
	BOWA (Int./EU) Eschmann and other devices with 4 mm plugs R. Wolf HF surgical generator 400 kHz 2260001	HF connection cable mono L 5 m	815.054

17



spirit of excellence

HF CONNECTION CABLE MONO 8106xxx

Instrument connector	Device connector		Product no.
WOLF Instruments/surgical generator		HF connection cable mono L 3 m	8106.032
	Erbe (ACC/ICC/VIO)/BOWA (EU) R. Wolf HF surgical generator 400 kHz 2260002	HF connection cable mono L 5 m	8106.052
		HF connection cable mono L 3 m	8106.132
	Erbe (T series)	HF connection cable mono L 5 m	8106.152
		HF connection cable mono L 3 m	8106.031
HF electrodes, monopolar	Martin (M-version)/Berchtold/ Aesculap	HF connection cable mono L 5 m	8106.051
		HF connection cable mono L 3 m	8106.033
	Bovie/Valleylab/Erbe (Int.)/ BOWA (Int.) R. Wolf HF surgical generator 400 kHz 2260001	HF connection cable mono L 5 m	8106.053
		HF connection cable mono L 3 m	8106.034
	BOWA (Int./EU) Eschmann and other devices with 4 mm plugs R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable mono L 5 m	8106.054

X22||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

BIPO HF CONNECTION CABLE 8108xxx

Instrument connector	Device connector		Product no.
WOLF Bipolar forceps		HF connection cable bipo; L 3 m	8108.032
	ERBE (ACC/ICC/T)/BOWA (EU) R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo; L 5 m	8108.052
According to the second		HF connection cable bipo; L 3 m	8108.033
	International / 2-pin Valleylab R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo; L 5 m	8108.053
		HF connection cable bipo; L 3 m	8108.031
	WOLF/Martin (M-version)/ Berchtold/Aesculap	HF connection cable bipo; L 5 m	8108.051
	EMC Dolley	HF connection cable bipo; L 3 m	8108035
Bipolar tweezers connection		HF connection cable bipo; L 3 m	8108.132
	ERBE (ACC/ICC/T)/BOWA (EU) R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo; L 5 m	8108.152
		HF connection cable bipo; L 3 m	8108.133
R BOOLF	International / 2-pin Valleylab R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo; L 5 m	8108.153
		HF connection cable bipo; L 3 m	8108.131
	Martin (M-version)/Berchtold/ Aesculap	HF connection cable bipo; L 5 m	8108.151
	EMC Dolley	HF connection cable bipo; L 3 m	8108135



HF CONNECTION CABLE BIPO FOR RESECTION IN SALINE SOLUTION

Instrument connector	Device connector		Product no.
WOLF Bipolar resectoscopes	Erbe VIO 300D	Bipolar cable; TUR/TCR; WOLF MF plug; L 4 m	20196-119
	Erbe VIO 3	BIPOLAR CABLE; MF-U MF plug; L 4.5 m	21196-119
		HF connection cable bipo; L 3 m	8108.231
	KLS Martin	HF connection cable bipo; L 5 m	8108.251
		HF connection cable bipo; L 3 m	8108233
	R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo; L 5 m	8108253




MONO HF NEUTRAL ELECTRODE CABLE

Instrument connector	Device connector		Product no.
2-pole neutral electrode			
Williams (CE Distriction of the Control of the Cont		Mono HF neutral electrode cable, L 4.5 m	2260031
	R. Wolf HF surgical generator 400 kHz 2260001/2260002		

TÜBINGER MIC TRAINING DEVICE




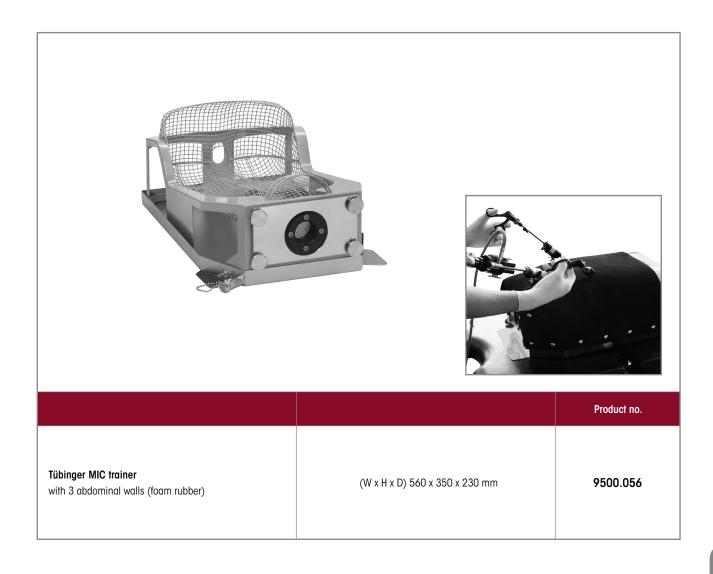

Recommended accessories	Product no.
Abdominal wall, foam rubber, PACK= 5 PCS	9500.0561
Available on request with transportation case	





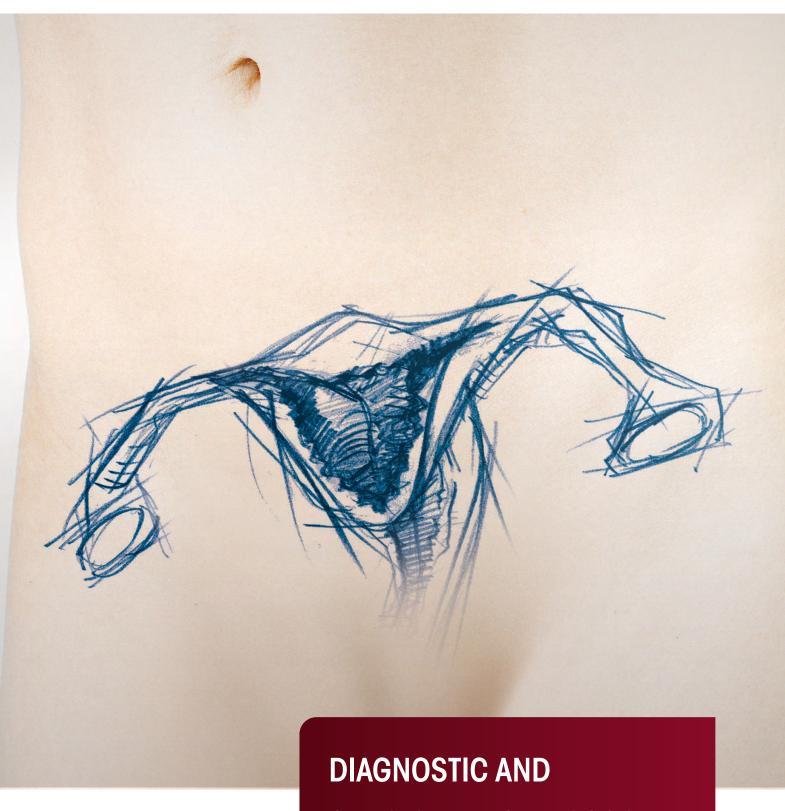

SURGICAL HYSTEROSCOPY



DIAGNOSTIC AND SURGICAL HYSTEROSCOPY

BASIC SETS
TELESCOPES
HYSTEROSCOPE SHEATHS FOR 2.5 MM/4.0 MM TELESCOPES
HYSTEROSCOPE Ø 3.9 MM, 30°/HYSTEROSCOPE Ø 5 MM, 20°
FORCEPS/SCISSORS/SMALL MODULAR SYSTEM Hy Safe
ELECTRODES, BIPOLAR, MONOPOLAR
INSTRUMENTS FOR PORTIO AND UTERUS
HYSTEROSCOPIC RESECTION
FLEXIBLE HYSTEROSCOPE
FLUID CONTROL
HF GENERATOR
ACCESSORIES

BASIC SET

FOR DIAGNOSTIC HYSTEROSCOPY

Product	Product no.	Quantity	Catalog/Section
without working channel			
Telescope 30° Ø 2.7 mm SL 310 mm	8974.402	1	Cunacalagu / hurtaragaanu
Sheath for hysteroscope 10.5 Fr	8985.11	1	Gynecology / hysteroscopy
alternative:			
Hysteroscope bndl	89864021	1	
Biopsy forceps bndl	8642.6312	1	Gynecology / hysteroscopy
Grasping forceps bndl	8642.6502	1	


BASIC SET HYSTERO-RESECTOSCOPE

PRTTCESS E-LINE & S(A)LINE SYSTEM, TELESCOPE 2.7 MM, 12°, 21 FR, PASSIVE, CONTINUOUS IRRIGATION

Product	Product no.	Quantity	Catalog/Section
Outer sheath for resectoscope 21 Fr	8653.021	1	
Inner sheath for resectoscope 19 Fr	8653.018	1	
Obturator for resectoscope 19 Fr	8653.18	1	
Passive, mono/bipo working element with open handle, passive cutting	8653.224	1	
Telescope 12° Ø 2.7 mm SL 310 mm	8974.412	1	
Cutting electrode bipo 21 Fr	46531313	1	
Roller electrode bipo 21/24.5 Fr	4653.023	1	- Gynecology / hysteroscopy
Hook electrode mono/bipo 21/24.5 Fr	865303	1	
Protective sterilization sleeve for connection to max. 5 electrodes, reusable	33030	1	
Bipolar HF cable	8108	1	
FLUID CONTROL 2225 Irrigation pump for HYS/URO/LAP bndI	22250011	1	
Balancing module	2225023	1	



MINI FIBER TELESCOPE 2.0 MM

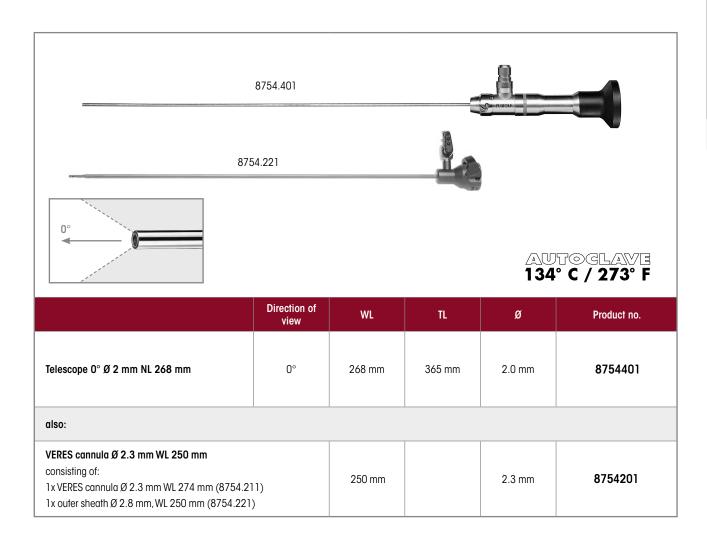

Recommended accessories		Product no.
Perforated basket for standard telescope 2 (for telescope 8754.401)	(L x W x H) 481 x 59 x 54 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231

| Subject to modifications, Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with

our contact partner or directly with Richard Wolf GmbH.


MINI SURGICAL HYSTEROSCOPE






HYSTEROSCOPE TELESCOPES Ø 2.7 MM/Ø 4.0 MM



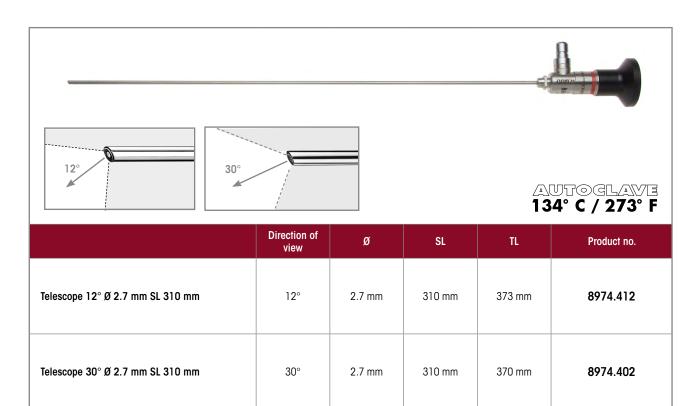

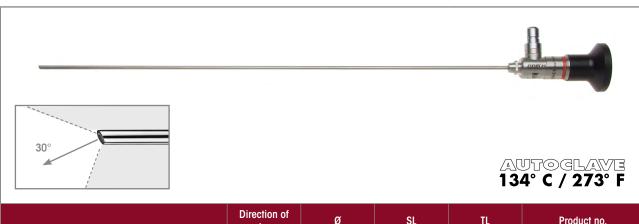

	Direction of view	Ø	SL	TL	Product no.
Telescope 30° Ø 4 mm SL 299 mm	30°	4.0 mm	299 mm	372 mm	8989.412


Recommended accessories		Product no.
Perforated basket for standard telescope 2	Dimensions (L x W x H): 481 x 59 x 54 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

DIAGNOSTIC HYSTEROSCOPE SHEATH 10.5 FR /Ø 3.5 MM

FOR TELESCOPE 2.7 MM, 30°

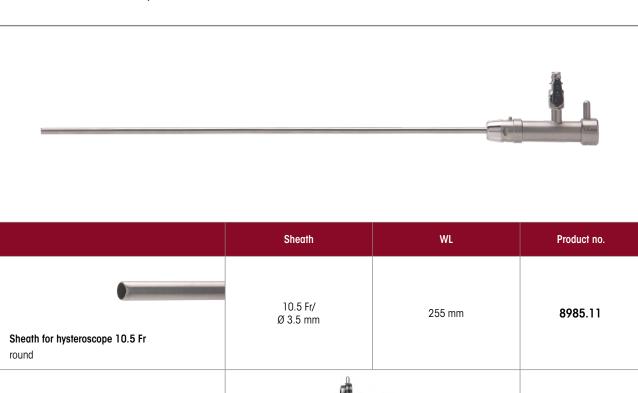

Handle for hysteroscope	8986.251
ala a	

also:


	Direction of view	Ø	SL	TL	Product no.
Telescope 30° Ø 2.7 mm SL 310 mm	30°	2.7 mm	310 mm	370 mm	8974.402

Recommended accessories		Product no.
Perforated basket for standard telescope 2	Dimensions (L x W x H): 481 x 59 x 54 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231



DIAGNOSTIC HYSTEROSCOPE SHEATH 12 FR, OVAL

FOR TELESCOPE 2.7 MM, 30°

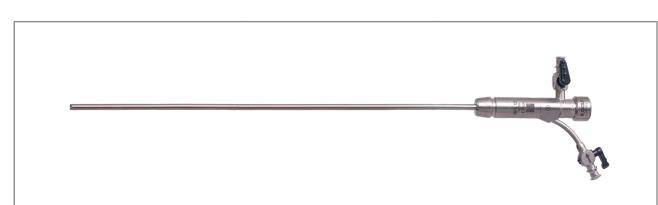

	Sheath	Working	channel	WL	Product no.
Sheath for hysteroscope 12 Fr	12 Fr	3	Fr	246 mm	8974.121
Handle for hysteroscope					8986.251
also:					
	Direction of view	Ø	SL	TL	Product no.
Telescope 30° Ø 2.7 mm SL 310 mm	30°	2.7 mm	310 mm	370 mm	8974.402

Recommended accessories		Product no.
Perforated basket for standard telescope 2	Dimensions (L x W x H): 481 x 59 x 54 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231

$\textit{OptiFLOW}^{\text{\tiny{m}}}$

HIGHFLOW CONTINUOUS IRRIGATION SURGICAL SHEATH 5.5 MM

FOR TELESCOPE 2.7 MM, 12° AND 30°




	Sheath Ø	Working channel	WL	Product no.
Sheath for hysteroscope 16.5 Fr distal sheath end, oval	16,5 Fr	5 Fr	219 mm	8974351
Handle for hysteroscope				8986.251
also:				1

	Direction of view	Ø	SL	TL	Product no.
Telescope 12° Ø 2.7 mm SL 310 mm	12°	2.7 mm	310 mm	373 mm	8974.412
Telescope 30° Ø 2.7 mm SL 310 mm	30°	2.7 mm	310 mm	370 mm	8974.402

Recommended accessories		Product no.
Perforated basket for standard telescope 2	Dimensions (L x W x H): 481 x 59 x 54 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231

DIAGNOSTIC HYSTEROSCOPE SHEATH 15 FR

FOR TELESCOPE 4 MM, 30°

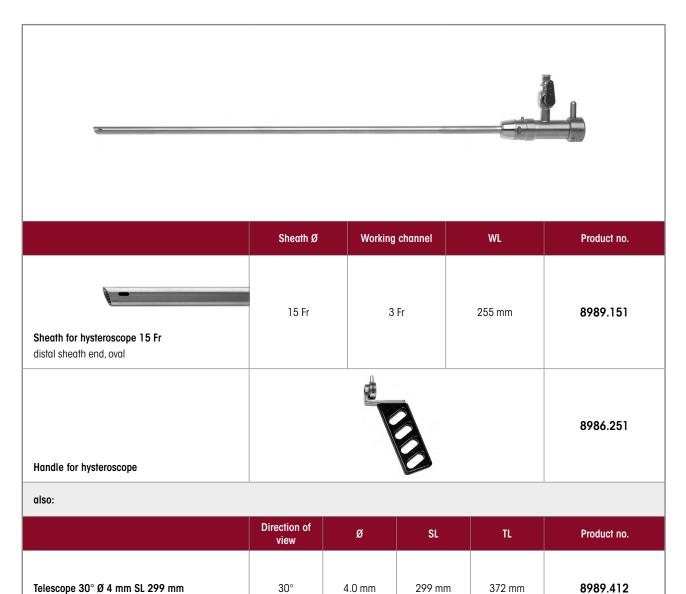


Recommended accessories		Product no.
Perforated basket for standard telescope 2	Dimensions (L x W x H): 481 x 59 x 54 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

SURGICAL CONTINUOUS IRRIGATION HYSTEROSCOPE SHEATH 15 FR OVAL

FOR TELESCOPE 4 MM, 30°

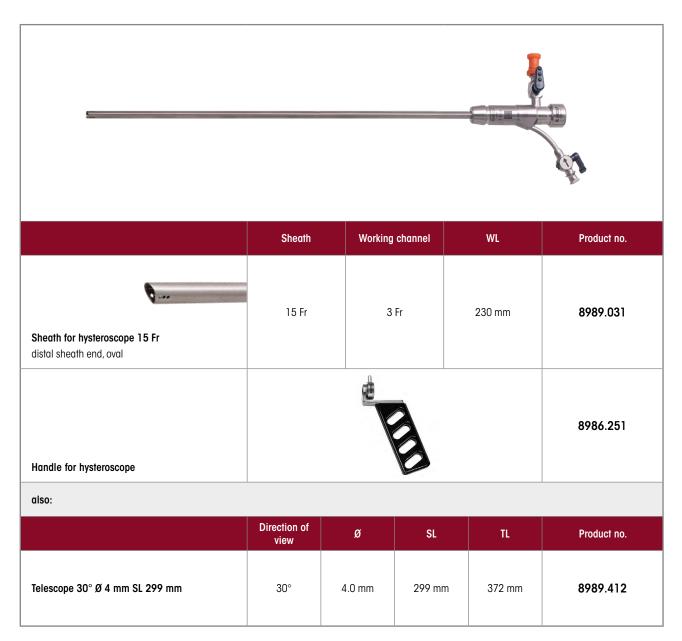

Recommended accessories		Product no.
Perforated basket for standard telescope 2	Dimensions (L x W x H): 481 x 59 x 54 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231



SURGICAL CONTINUOUS IRRIGATION HYSTEROSCOPE SHEATH 21 FR

FOR TELESCOPE 4 MM, 30°

Telescope 30° Ø 4 mm SL 299 mm



		Sheath	channel	WL	Product no.
Outer sheath for hysteroscope 21 Fr	with oblique distal end, rotatable drain stopcock, and quick release lock	21 Fr	-	204 mm	8988.031
Obturator for hysteroscope OD 5 mm	specifically for 8988.031				8988.131
Working insert for hysteroscope 21 Fr	with deflection lever and supply stopcock		7 Fr		8988.231
Working insert for hysteroscope 21 Fr	with ramp and supply stopcock		7 Fr		8988.241
also:	1				
	Direction of view	Ø	SL	TL	Product no.

Recommended accessories		Product no.
Perforated basket for standard telescope 2	Dimensions (L x W x H): 481 x 59 x 54 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231

4.0 mm

299 mm


372 mm


view

30°

8989.412

HYSTEROSCOPE 3.9 MM, 30°



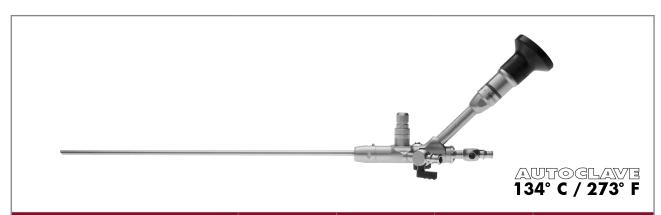


	Sheath	Working channel	WL	Product no.
Hysteroscope bndl consisting of: Hysteroscope 30° Ø 3.9 mm WL 217 mm (8986402) and rubber cap capacity 0.8 mm (PACK = 10 PCS, 88.01)	Ø 3.9 mm	5 Fr	217 mm	89864021
Handle for hysteroscope				8986.251

Recommended accessories		Product no.
Perforated basket for hysteroscope 2 with small part basket	Internal dimensions (W x H x D): 451 x 80 x 124 mm, External dimensions (W x H x D): 467 x 90 x 132 mm	38009
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231

HYSTEROSCOPE $5~\text{MM}, 20^{\circ}$



spirit of excellence

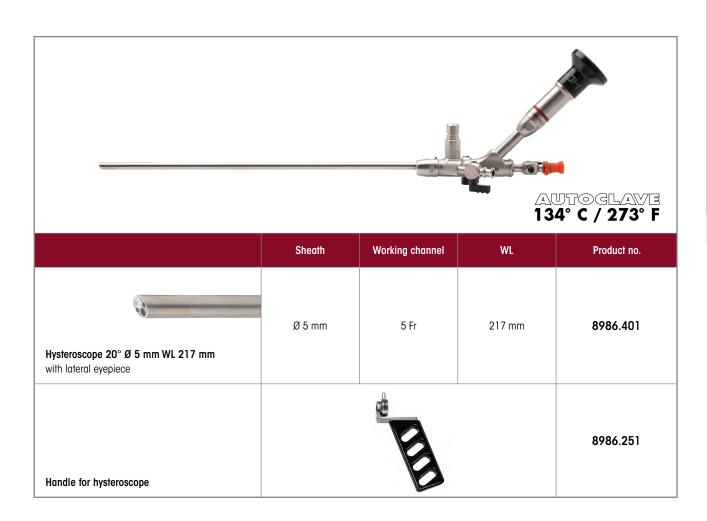


Recommended accessories		Product no.
Perforated basket for hysteroscope 2 with small part basket	Internal dimensions (W x H x D): 451 x 80 x 124 mm, External dimensions (W x H x D): 467 x 90 x 132 mm	38009
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

RIGID PREPARATION FORCEPS 7 FR

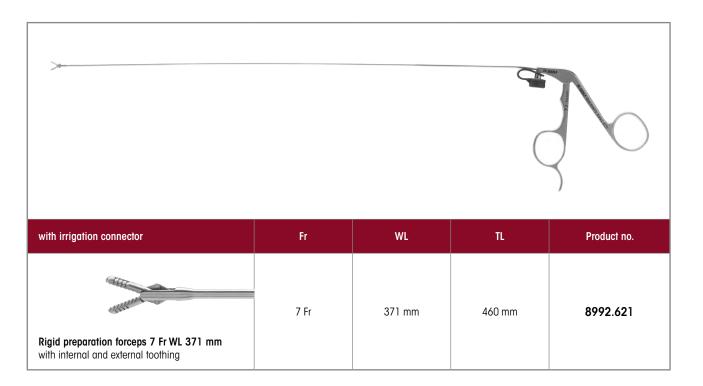



FORCEPS AND SCISSORS

SMALL MODULAR SYSTEM H_{γ} Scree

 360° rotatable, can be flushed through, easy click

OOO KOIAIADEE, OAN DE			0. 01.01X		
Grasping forceps jaw insert with	n sheath			Handle with overload protection	Complete instrument • Jaw section • Handle
	MARINE SPECIAL				Halland
	Product no.	Fr	WL	8083.001	Product no.
Grasping forceps bndl angled distally with pike-mouth jaws	8642.6508	5	340 mm	•	8642.6502
Grasping forceps bndl with pike-mouth jaws	8992.6308	7	310 mm	•	8992.6302
Grasping forceps bndl spoon	8642.6008	5	340 mm	•	8642.6002
Scissors bndl	8642.6818	5	340 mm	•	8642.6812
Biopsy forceps bndl	8642.6318	5	340 mm	•	8642.6312
Hook scissors bndl	8992.6408	7	310 mm	•	8992.6402




MONOPOLAR ELECTRODE 5/6 FR

MONOPOLAR			R.WOLF #23.06
	Fr 6 Fr	WL 400 mm	Product no. 823.06
Coagulation electrode mono 6 Fr WL 400 mm Needle electrode mono 5 Fr WL 420 mm	5 Fr	420 mm	824.05

HF connection cable: see page GYN162/163

FOR PORTIO AND UTERUS

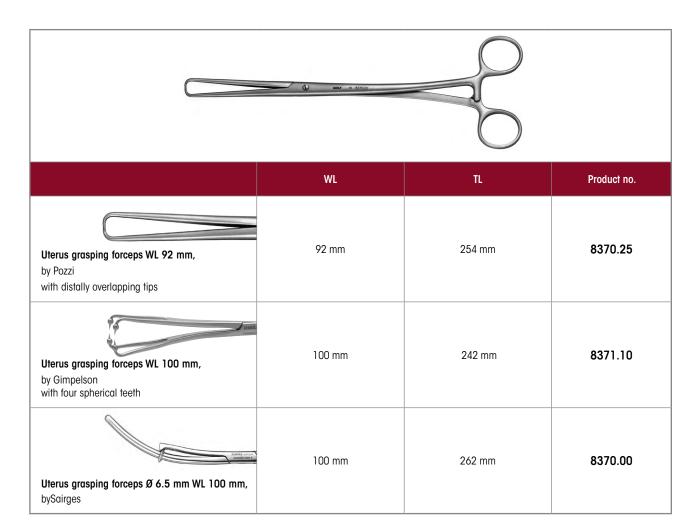


for fixation, elevation, as well as hydro and chromopertubation of the uterus						
(8378.90)	8378.00					
	WL	TL	Product no.			
Intrauterine probes bndl consisting of: Intrauterine probe Ø 32 mm WL 32 mm, by Cohen (8378.00), conical portio adapter size small (8378.90), conical portio adapter size large (8378.91), tube with Luer-Lock connector (886.00)	32 mm	330 mm	8378001*			

^{*}also: Uterus grasping forceps WL 92 mm, by Pozzi (8370.25)



|124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

PRINCESS PETIT RESECTOSCOPE INCLUDING E-LINE & S(A)LINE SYSTEM

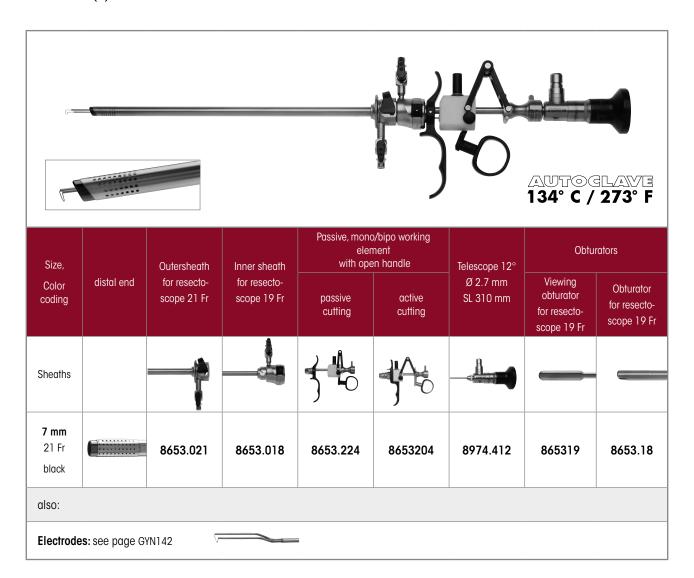



Recommended accessories		Product no.
Working insert for resectoscope for auxiliary instruments up to 7 Fr		8653284
HF monopolar connection cable		see page GYN162/163
Container (W x H x D) 400 X 60 X 200 mm	Internal dimensions (W x H x D): 400 x 57 x 200 mm External dimensions (W x H x D): 466 x 77 x 266 mm	33022
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (809.507), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231

HYSTEROSCOPIC RESECTION

spirit of excellence

Princess



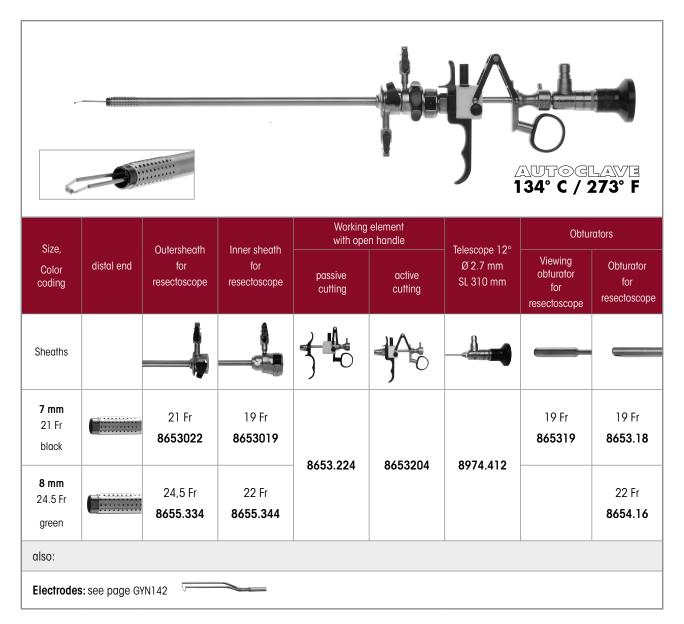

Recommended accessories		Product no.
Working insert for resectoscope for auxiliary instruments up to 7 Fr		8653284
HF monopolar connection cable		see page GYN162/163
Container (W x H x D) 400 X 60 X 200 mm	Internal dimensions (W x H x D): 400 x 57 x 200 mm External dimensions (W x H x D): 466 x 77 x 266 mm	33022
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (809.507), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231

ELECTRODES

FOR PRINCESS RESECTOSCOPE, TELESCOPE 2.7 MM, 12°

12°, for multiple use, monopolar/bipolar

Designation	Bracket	for sheath s	sizes [in Fr]	Color	coding	Product no.
Designation	Diuckei	0] 21	CI 24.5	Fork	Stem	Product no.
Cutting electrode mono 21 Fr	Loop round Ø 0.3 mm	•	-	red	blue	8653.131
Cutting electrode mono 24.5 Fr	Loop round Ø 0.3 mm	-	•	blue	blue	8653.132
Roller electrode mono 21/24.5 Fr	Roll	•	•	red	blue	8653.02
Hook electrode mono/ bipo 21/24.5 Fr	Hook	•	•	red	blue	865303

• suitable for corresponding sheath size

- not suitable

CI = continuous irrigation

12°, disposable, sterile* bipolar

(PACK =	Danier skier	Dunched	for sheath sizes [in Fr]		Color coding		
3 PCS)	Designation	Bracket	CI 21	CI 24.5	Fork	Stem	Product no.
	Cutting electrode bipo 21 Fr	Loop round Ø 0.3 mm	•	-	transparent	blue	46531313
	Cutting electrode bipo 24.5 Fr	Loop round Ø 0.3 mm	-	•	transparent	blue	4653.1323
	Roller electrode bipo 21/24.5 Fr	Roll	•	•	transparent	blue	4653.023
	BIVAP electrode bipo 21 Fr	Torus	•	-	blue	blue	46530213
	BIVAP electrode bipo 24.5 Fr	Torus	-	•	blue	blue	46530243
	Hook electrode 21/24.5 Fr	Hook	•	•	blue	blue	4653033

• suitable for corresponding sheath size

not suitable

* in individual sterile packaging

CI = continuous irrigation


Recommended accessories		Product no.
Protective sterilization sleeve for connection to max. 5 electrodes, reusable	REGULATION AND STREET	33030

WOLF

spirit of excellence

RESECTION MASTER

WITH AUTOMATIC CHIP SUCTION

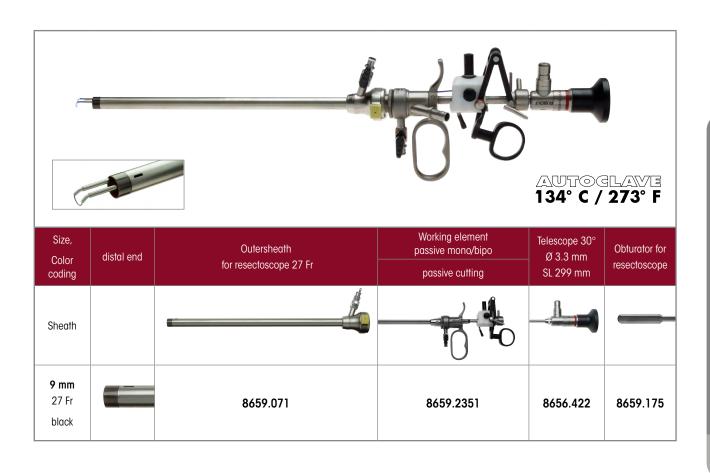

Recommended accessories		Product no.
Tube set RESECTION PUMP 2228 disposable	PVC, (PACK = 10 PCS) in individual sterile packaging	4170.2228
HF monopolar connection cable		see page GYN162/163
Container (W x H x D) 400 X 60 X 200 mm	Internal dimensions (W x H x D): 400 x 57 x 200 mm External dimensions (W x H x D): 466 x 77 x 266 mm	33022
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (809.507), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231

8



ELECTRODES

FOR RESECTION MASTER WITH AUTOMATIC CHIP SUCTION

30°, for	30°, for multiple use, monopolar/bipolar						
	Designation	nation Bracket for sheath sizes [in Fr] Color coding Cl 27 Fork Stem		Product no.			
	Cutting electrode mono 27 Fr	Loop round Ø 0.25 mm	•	red	red	8659.161	
	Vapo electrode mono 27 Fr	Loop cylindrical	•	blue	blue	8659.162	
	Hook electrode mono/bipo 27 Fr	Hook	•	red	red	8659163	

CI = continuous irrigation

30°, disposable, sterile*, bipolar						
(PACK = 3 PCS)	Designation	Bracket	for sheath sizes [in Fr]	Color Fork	coding Stem	Product no.
	Cutting electrode bipo 27 Fr	Loop round Ø 0.25 mm	•	blue	blue	4659.1613
	Roller electrode bipo 27 Fr	Loop Roll Ø 0.3 mm	•	blue	blue	4659.1623

^{*} in individual sterile packaging CI = continuous irrigation





RESECTION PUMP 2228

MICROPROCESSOR-CONTROLLED HIGH-PERFORMANCE CHIP SUCTION PUMP WITH CLEAR LCD DISPLAY



		Product no.
RESECTION PUMP 2228 Suction pump		2228.001
also:		
Tube set RESECTION PUMP 2228 (PACK = 10 PCS,) packed singly, sterile	consisting of: Control tube with filter, irrigation tube with non-return valve, chip aspiration tube with non-return valve and pump tube	4170.2228
Bottle holder cpl.		64030.125
Bottle mount		64031.381
Overflow protection / bacteria filter for single use (PACK = 10 PCS)		2228.901
Chip collecting container 250 ml for tissue chips		2228.801
Tube insert for collecting container 250 ml		2228.802
Secretion container, 2 I	2 liters, without cover	8170.6551
Cover	for secretion trap 8170.6551, reusable	8170.6552
Sound absorber (PACK = 3 PCS)		35100.115
Connection tube recto pump		8170.6554
Power cable	cable length 3 m	2440.03

||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.


TECHNICAL DATA RESECTION PUMP 2228

RESECTION PUMP 2228	2228.001
Device properties	
Operating conditions	+10°C to +40°C, 30% to 75% rel. humidity, atmospheric pressure 800 hPa to 1,060 hPa
Storage and transport conditions	- 20°C to +60°C , 10% to 90% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa
Power supply	
Mains + frequency	100-240 V~, 50/60 Hz
Power consumption	120 VA
Current rating	1.2-0.5
Fuse	T 1.6 AL 250 V
Regulatory standards	
Protection class to EN/IEC 60601-1 (UL 2601-1/CSA C22.2 No.601.1 – for USA)	1
Electromagnetic compatibility (EMC)	EN/IEC 60601-1-2
Medical Devices Directive 93/42/EEC	Class II a
Degree of protection against the ingress of liquids	IP 20 (not protected)
Noise level	55 dB (A) (pump "ON" with container)
Operating mode	Continuous operation
Protection against electric shock	Type BF applied part
Degree of protection in the presence of flammable mixtures	Device is not protected against explosions (do not operate this device in explosive atmospheres)
Dimensions and weights	
Weight, bndl with accessories	8.9 kg (19.6 lbs)
Dimensions (W x H x D)	340 mm x 105 mm x 420 mm
Space requirements with bottle holder (W x H x D)	470 mm x 410 mm x 430 mm
Relevant application parameters	
Vacuum Operation vacuum Maximum vacuum	650 to 750 mbar +/- 50 mbar 750 mbar +/- 50 mbar
Suction pulse Level 1 (low) Level 2 (medium) Level 3 (high)	3.8 ml +/- 0.5 ml 6.2 ml +/- 0.7 ml 9.2 ml +/- 1.0 ml



Shark BIPOLAR RESECTOSCOPE FOR TELESCOPE 4 MM, 30°, 12

WITH CONTINUOUS IRRIGATION DOUBLE SHEATH SYSTEM FOR RESECTION IN SALINE SOLUTION

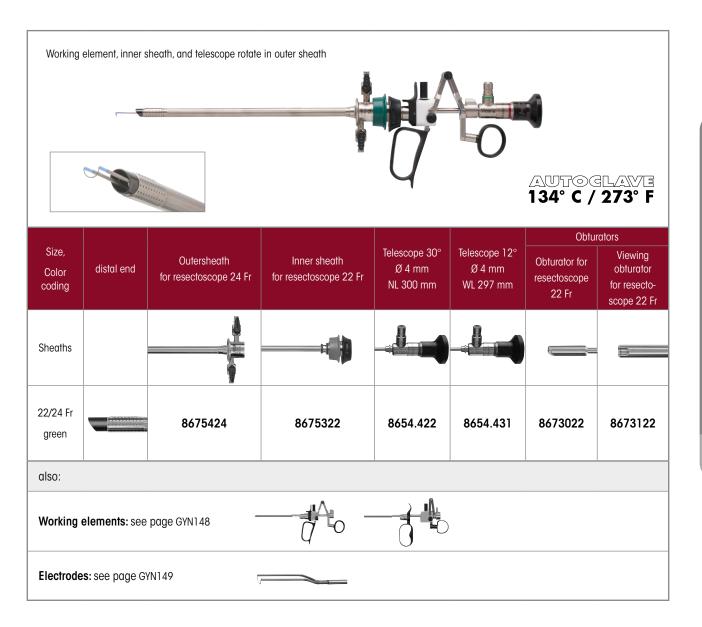

Recommended accessories		Product no.
HF bipolar connection cable		see page GYN164/165
Perforated basket for standard telescope 2	Internal dimensions (W x H x D): 454 x 52 x 40 mm External dimensions (W x H x D): 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231

||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

WORKING ELEMENTS FOR Shark BIPOLAR RESECTOSCOPES TELESCOPE 4 MM, 30°, 12°

	Handle variants	cutting	Product no.
Active working element bipo 0/12/30° Cut is made against spring pressure	open		8680.204
Active working element bipo 0/12/30° Cut is made against spring pressure	closed	active	8680.205
Passive working element bipo 0/12/30° Cut is made with spring pressure	open	ngosiyo	8680.224
Passive working element bipo 0/12/30° Cut is made with spring pressure	closed	passive	8680.225

Recommended accessories		Product no.
Rubber cap, black (PACK = 5 PCS)	for sealing off the electrode clamping mecha- nism on the working element	8880
Thumb ring with relatively large inner diameter		15008.159



ELECTRODES FOR Shark BIPOLAR RESECTOSCOPES TELESCOPE 4 MM, 30°, 12°

12°/30°, for multiple use, bipolar for sheath sizes [in Fr] **Color coding Bracket** Designation Model Fork CI 22/24 Stem **Cutting electrode** Loop bipo 22 Fr blue 8622133 round yellow Ø 0.3 mm 12/30° Coag. electrode Cylinder bipo 22-26 Fr blue yellow 8623022 Ø 1.2 mm 12/30° Hook electrode bipo 22-26 Fr blue 862309 Hook yellow 12/30°

• suitable for corresponding sheath size

1124 Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with year with Richard Wolf GmbH.

CI = continuous irrigation

12°/30°, disposable, sterile*, bipolar							
(PACK =	Designation Regret		for sheath sizes [in Fr]	Color coding		Model	
3 PCS)	Ů		Cl 22/24	Fork	Stem		
	Cutting electrode mono 22 Fr 12/30°	Loop round Ø 0.25 mm	•	blue	blue	4622.2533	
5	Cutting electrode bipo 22 Fr 12/30°	Loop round Ø 0.3 mm	•	blue	blue	4622.1333	
	Coag. electrode bipo 22 Fr 12/30°	Cylinder Ø 1.2 mm	•	blue	blue	4623.0243	
	BIVAP electrode bipo 22 Fr 12/30°	Torus	•	blue	blue	46300223	

- suitable for corresponding sheath size
- * in individual sterile packaging
- CI = continuous irrigation

Recommended accessories		Product no.
Protective sterilization sleeve for connection to max. 5 electrodes, reusable	REDIF 141251	33030


spirit of excellence

1124 Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with

your contact partner or directly with Richard Wolf GmbH.

FOR TELESCOPE 4 MM, 30°, 12°

WITH CONTINUOUS IRRIGATION DOUBLE SHEATH SYSTEM

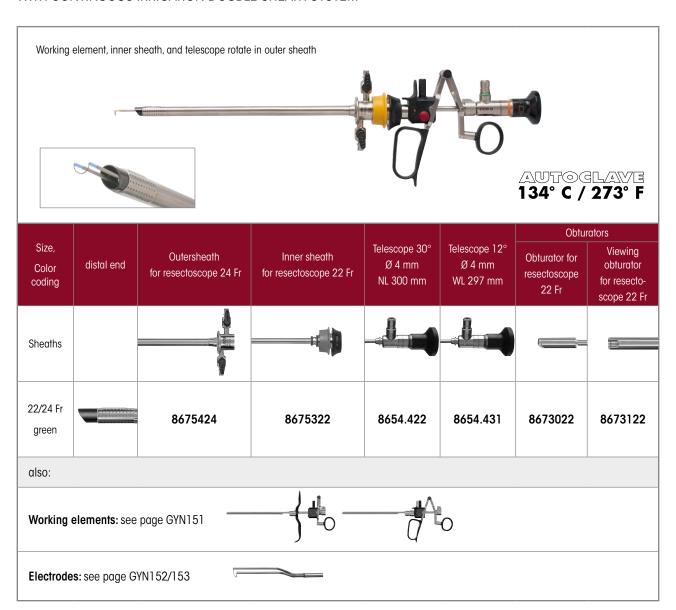

Recommended accessories		Product no.
HF monopolar connection cable		see page GYN162/163
Perforated basket for standard telescope 2	Internal dimensions (W x H x D): 454 x 52 x 40 mm External dimensions (W x H x D): 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (809.507), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231

WORKING ELEMENTS FOR **Shark** MONOPOLAR RESECTOSCOPES TELESCOPE 4 MM, 30°, 12°

	Handle variants	cutting	Product no.
Active working element mono 12/30° Cut is made against spring pressure	closed		8674205
Active working element mono 12/30° Cut is made against spring pressure	closed with comfort thumb rest	active	8674234
Passive working element mono 12/30° Cut is made with spring pressure	open	passive	8674224
Passive working element mono 12/30° Cut is made with spring pressure	closed	μυσσίνα	8674225

Recommended accessories		Product no.
Rubber cap, red (PACK = 5 PCS)	for sealing off the electrode clamping mechanism on the working element	8874
Thumb ring with relatively large inner diameter		15008.159



1124 Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with

our contact partner or directly with Richard Wolf GmbH.

ELECTRODES FOR Shark MONOPOLAR RESECTOSCOPES TELESCOPE 4 MM, 30°, 12°

12°/30°, for multiple use, monopolar for sheath sizes [in Fr] Color coding Designation **Bracket** Model Fork Stem **Cutting electrode** Loop mono 22 Fr 86782235 round dark gray green Ø 0.35 mm 12/30° Coag. electrode mono 22-24 Fr Roll green dark gray 86782201 12/30° Coag. electrode mono 22-24 Fr 86782202 Sphere dark gray green 12/30° Coag. electrode mono 22-24 Fr Button 86782203 dark gray green 12/30° Knife electrode mono 22-24 Fr Knife dark gray 86782204 green 12/30° Hook electrode mono 22-24 Fr 86782205 Hook green dark gray 12/30° Wing electrode Wing (bracket profile, 86782206 mono 22 Fr green dark gray 12/30°

[•] suitable for corresponding sheath size







DISPOSABLE ELECTRODES

FOR Shark MONOPOLAR RESECTOSCOPES TELESCOPE 4 MM, 30°, 12°

$12^{\circ}/30^{\circ}$ disposable, sterile*, monopolar

	Designation	Dracket	for sheath sizes [in Fr]	Color	coding	Model
	Designation	Bracket	CI 22/24	Fork	Stem	Model
	Cutting electrode mono 22 Fr 12/30° (PACK = 10 PCS)	Loop round Ø 0.35 mm	•	green	transparent	46782235
5	Cutting electrode mono 22 Fr 12/30° (PACK = 10 PCS)	Loop round Ø 0.25 mm	•	green	transparent	46782225
2	Coag electrode mono 22–24 Fr 12/30° (PACK = 5 PCS)	Roll	•	green	transparent	46782201
6	Coag electrode mono 22–24 Fr 12/30° (PACK = 5 PCS)	Sphere	•	green	transparent	46782202
*	Coag electrode mono 22–24 Fr 12/30° (PACK = 5 PCS)	Button	•	green	transparent	46782203
	Knife electrode mono 22–24 Fr 12/30° (PACK = 5 PCS)	Knife	•	green	transparent	46782204
	Hook electrode mono 24 Fr 12/30° (PACK = 5 PCS)	Hook	•	green	transparent	46782205

[•] suitable for corresponding sheath size


^{*} in individual sterile packaging

CI = continuous irrigation

spirit of excellence

FLEXIBLE FIBER HYSTEROSCOPE

2.5 MM/7.5 FR

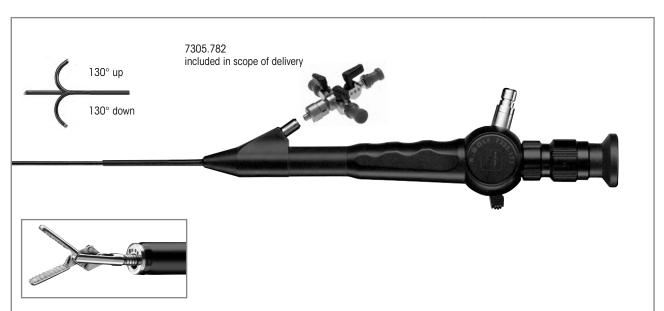

	Outer Ø	Working channel	WL	īL	Product no.	
Fiber Hysteroscope Ø 2.5 mm WL 200 mm Slanted distal tip articulation +130/-130° direction of view 0°, angle of view 60°	2.5 mm 7.5 Fr	1.2 mm 3.6 Fr	200 mm	450 mm	7325.122	
on request						
ammunia ammanana	Flex. grasping forceps Ø 1 mm WL 600 mm, rippled		600 mm	736 mm	7223.65	

Recommended accessories		Product no.
Sterilization basket for flexible endoscopes	(W x H x D): 448 x 288 x 106 mm	33016
Fiber light cable bndl consisting of: Fiber light cable Ø 1.6 mm TL 1.8 m (80661618), projector-side adapter (809.507), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806616181



FLUID CONTROL 2225

SUCTION IRRIGATION PUMP



		Product no.
FLUID CONTROL 2225 Irrigation pump for HYS/URO/LAP	Fluid management for flushing irrigation fluids into the uterus, as well as the upper and lower urinary tract, and for suction and irrigation in the abdomen	2225001
FLUID CONTROL 2225 Irrigation pump for HYS/URO/LAP bndl	consisting of: Irrigation pump for HYS/URO/LAP (2225001) Power cable (2440.03)	22250011
also:		
Balancing module	for hysteroscopy and endourology, fluid management for fluid balancing in combination with FLUID CONTROL 2225, mobile stand with integrated weighing cells and space for up to 4 irrigation fluid bags	2225023



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

FLUID CONTROL 2225

SUCTION IRRIGATION TUBE SETS

Irrigation			Product no.
Accessories – reusable	Tube set with piercing spike	with Luer-Lock connection, autoclavable, incl. 10 spare membranes, reusable for 20 reprocessing cycles	8171223
	Irrigation tube set with piercing spike, L 3 m	(PACK= 10 PCS), with Luer-Lock connection, sterile, disposable product	4171223
Accessories – disposable	Tube set with CARE-LOCK, L 3 m	(PACK= 10 PCS), sterile, disposable product	4171224
	Suction irrigation tube set	(PACK= 10 PCS), with piercing spike, sterile disposable product, PVC	4171225

Suction			Product no.
	Tube set for vacuum, incl. filter	with integrated hygiene filter, PACK= 10 PCS, service life: 30 days (connected to irrigation pump)	2206207
	Irrigation tube	L 1.2 m, with Luer-Lock, for suction irrigation handle 8385.901 and tube set 8171223 or 8170.223	817123
Accessories - reusable	Suction tube L 3 m	for suction irrigation handle 8385.901	8171402
	Secretion container, 2 I	2 liters, without cover	8170.6551
	Cover	for secretion trap 8170.6551, reusable	8170.6552
	Secretion container, 2.5 I	2.5 liters	41706566
Accessories	Secretion container bndl consisting of:	Secretion container 2.5 I (41706566) and secretion bag (PACK= 90 PCS) (41706564)	4170657
– disposable	Tube set for suction (2 connections)	sterile, disposable product, (PACK= 10 PCS) for connecting instruments to collecting container	T0503-01
	Angled 90° plug-in coupling	(PACK= 10 PCS) For connecting vacuum tube 2206207 to disposable container systems	0771019



FLUID CONTROL 2225

CABLE ACCESSORIES

		Product no.
Patch cable, RJ45 SFTP, 0.5 m	Cable length 0.5 m	72325378
Patch cable, RJ45 HRS TM11, 1.0 m	Cable length 1.0 m	72325429
Patch cable, RJ45 S/FTP CAT.6 10 m	Cable length 10 m	72325434
Plastic caps for network socket	(PACK = 8 PCS)	5592105
Power cable	Cable length 3 m	2440.03

10

TECHNICAL DATA FLUID CONTROL 2225

FLUID CONTROL 2225		2225001	
Device properties			
Operating conditions		+10°C to +40°C, 30% to 75% rel. humidity, 70 to 106 kPa atmospheric pressure 3,000 m max. altitude above sea level	
Storage and transport co	nditions	- 20°C to + 60°C , 10% to 90% rel. humidity 70 to 106 kPa atmospheric pressure	
Power supply			
Mains + frequency		100–240 V~, 50/60 Hz	
D	100 V/60 Hz	110 VA	
Power consumption	240 V/50 Hz	120 VA	
Current rating	100 V/60 Hz	1.10 A	
Current failing	240 V/50 Hz	0.50 A	
Fuse		T 3.15 AH, 250 V	
Regulatory standards			
Protection class (I, II)		1	
Electromagnetic compati	bility (EMC)	EN 60601-1/IEC 60601-1	
		EN 60601-1-2/IEC 60601-1-2	
Medical Devices Directive	93/42/EEC	Class IIb	
Housing protection rating	(IP code)	IP21	
Protection against electri	c shock	Type BF applied part	
Degree of protection in the presence of flammable mixtures		Device is not protected against explosions (do not operate this device in explosive atmospheres)	
Maximum suction vacuum		-60 kPa	
Dimensions and weights	3		
Weight		8.8 kg	
Dimensions (W x H x D)		300 mm x 157 mm x 436 mm	

Relevant application parameters		
	Hysteroscopy: 800 ml/min (max. flow, not adjustable)	
Nominal flow range	Endourology: 10–800 ml/min (max. flow)	
	Laparoscopy: 0.1–1.8 l/min (max. flow)	
Suction power	max. 2 I/min	
	Hysteroscopy: 15–200 mmHg	
Starting nominal pressure range	Endourology: 15–90 mmHg/20–120 cmH20	
	Laparoscopy: 300 mmHg (not adjustable)	
Pressure	0–300 mmHg	
Deficit	-9,990 to +9,990 ml/0 to 99.9 l	




TECHNICAL DATA FLUID CONTROL 2225

Balancing module	2225023
Device properties	
Operating conditions	+10°C to +40°C, 30% to 75% rel. humidity, 70 to 106 kPa atmospheric pressure 3,000 m max. altitude above sea level
Storage and transport conditions	- 20° C to + 60° C, 10% to 90% rel. humidity 70 to 106 kPa atmospheric pressure
Regulatory standards	
Electromagnetic compatibility (EMC)	EN 60601-1/IEC 60601-1 EN 60601-1-2/IEC 60601-1-2
Housing protection rating (IP code)	IP21
Maximum load of container scale	16 kg/4 containers of 3 I each
Maximum load of bag scale	23 kg/4 bags of 5 I each
Dimensions and weights	·
Weight	15.4 kg
Dimensions (W x H x D)	618 mm x 1,064 mm x 618 mm

10



HF GENERATOR 2260

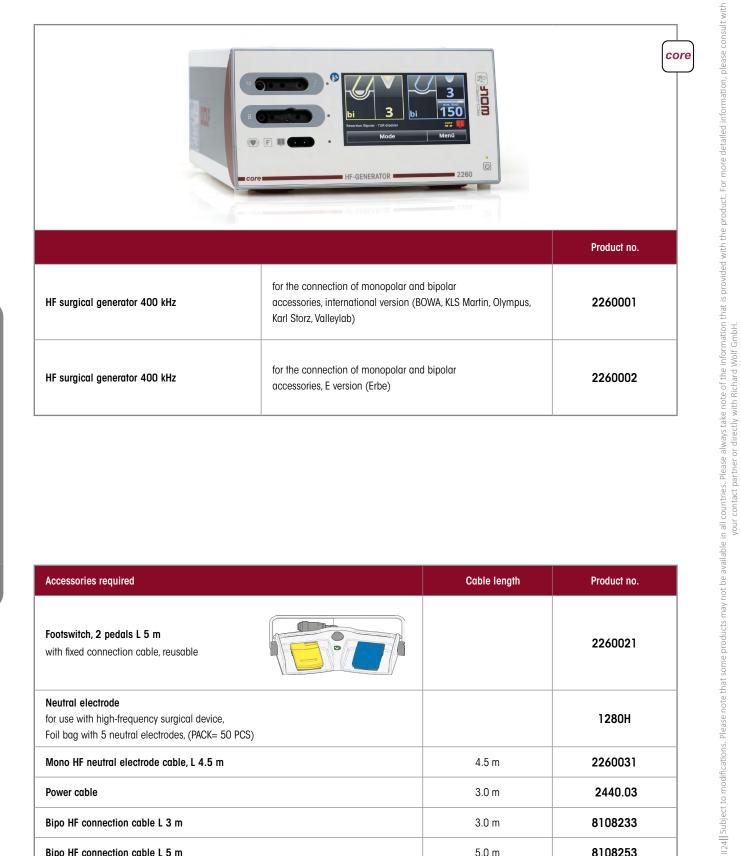

Accessories required	Cable length	Product no.
Footswitch, 2 pedals L 5 m with fixed connection cable, reusable		2260021
Neutral electrode for use with high-frequency surgical device, Foil bag with 5 neutral electrodes, (PACK= 50 PCS)		1280H
Mono HF neutral electrode cable, L 4.5 m	4.5 m	2260031
Power cable	3.0 m	2440.03
Bipo HF connection cable L 3 m	3.0 m	8108233
Bipo HF connection cable L 5 m	5.0 m	8108253



HF GENERATOR 2260

TECHNICAL DATA

HF surgical generator 4	00kHz	2260001/2260002	
Device properties			
Type of controls on hous	ing front	Touch panel	
	max.cutting power	400 W	
Output power	max.coagulation power	350 W	
LF and HF leakage currents		acc. to DIN EN 60601 1 and DIN EN 60601 2 2	
Signal level		HF indicator 55 dB(A); adjustable 45–60 dB(A) Alarm 65 dB(A)	
Operating conditions		+10°C to +40°C, 30% to 75% rel humidity, 700 hPa to 1,060 hPa atmospheric pressure	
Storage and transport co	onditions	- 20°C to + 60°C, 10% to 90% rel humidity, 700 hPa to 1,060 hPa atmospheric pressure	
Power supply			
Mains + frequency		100–240 V~, 50/60 Hz	
Davier consumention	without HF output	45 VA	
Power consumption	at max. output power	650 VA	
Current rating		max. 6.3 A	
Fuse		T 6.3 AH 250 V	
Regulatory standards			
Protection class to EN/IE (UL 2601-1/CSA C222 N		I	
Electromagnetic compat	ibility (EMC)	EN/IEC 60601-1-2	
Medical Devices Directive	e 93/42/EEC	Class IIb	
Degree of protection ago (DIN EN/IEC 60529)	ainst the ingress of liquids	IPXO	
Degree of protection ago	uinst the ingress of solids	IP2X	
Duty factor (duty cycle DC)		Intermittent INT 10 s/30 s corresponding to 25% DC	
Protection against electric shock		Model CF applied part, defibrillator-proof	
Degree of protection in the presence of flammable mixtures		Device is not protected against explosions (do not operate this device in explosive atmospheres)	
Dimensions and weight	s		
Weight		10.2 kg (22.4 lbs)	
Dimensions (W x H x D)		300 x 159 x 419 mm	



HF CONNECTION CABLE MONO 815xxx

spirit of excellence

||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

Instrument connector	Device connector		Product no.
WOLF Resectoscopes		HF connection cable mono L 3 m	815.032
	ERBE (ACC/ICC/VIO)/BOWA (EU) R. Wolf HF surgical generator 400 kHz 2260002	HF connection cable mono L 5 m	815.052
0		HF connection cable mono L 3 m	815.132
	ERBE (T series)	HF connection cable	815.152
HF electrodes,		HF connection cable mono L 3 m	815.031
monopolar	Martin (M-version)/Berchtold/ Aesculap	HF connection cable	815.051
		HF connection cable mono L 3 m	815.033
	Bovie/Valleylab/Erbe (Int.)/ BOWA (Int.) R. Wolf HF surgical generator 400 kHz 2260001	HF connection cable mono L 5 m	815.053
		HF connection cable mono L 3 m	815.034
	BOWA (Int./EU) Eschmann and other devices with 4 mm plugs R. Wolf HF surgical generator 400 kHz 2260001	HF connection cable mono L 5 m	815.054



HF CONNECTION CABLE MONO 8106XXX

Instrument connector	Device connector		Product no.
WOLF Instruments/surgical generator		HF connection cable mono L 3 m	8106.032
	ERBE (ACC/ICC/VIO)/BOWA (EU) R. Wolf HF surgical generator 400 kHz 2260002	HF connection cable mono L 5 m	8106.052
		HF connection cable mono L 3 m	8106.132
	ERBE (T series)	HF connection cable mono L 5 m	8106.152
		HF connection cable mono L 3 m	8106.031
HF electrodes, monopolar	Martin (M-version)/Berchtold/ Aesculap	HF connection cable mono L 5 m	8106.051
		HF connection cable mono L 3 m	8106.033
	Bovie/Valleylab/Erbe (Int.)/ BOWA (Int.) R. Wolf HF surgical generator 400 kHz 2260001	HF connection cable	8106.053
	DOWN A LITTLE	HF connection cable mono L 3 m	8106.034
	BOWA (Int./EU) Eschmann and other devices with 4 mm plugs R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable mono L 5 m	8106.054



||124||Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

BIPO HF CONNECTION CABLE 8108xxx

Instrument connector	Device connector		Product no.
WOLF Bipolar forceps		HF connection cable bipo; L 3 m	8108.032
	ERBE (ACC/ICC/T)/BOWA (EU) R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo; L 5 m	8108.052
Assort Assort		HF connection cable bipo; L 3 m	8108.033
	International / 2-pin Valleylab R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo; L 5 m	8108.053
		HF connection cable bipo; L 3 m	8108.031
	WOLF/Martin (M-version)/ Berchtold/Aesculap	HF connection cable bipo; L 5 m	8108.051
	EMC Dolley	HF connection cable bipo; L 3 m	8108035
Bipolar tweezers connection		HF connection cable bipo; L 3 m	8108.132
RUDIF	ERBE (ACC/ICC/T)/BOWA (EU) R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo; L 5 m	8108.152
		HF connection cable bipo; L 3 m	8108.133
	International / 2-pin Valleylab R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo; L 5 m	8108.153
		HF connection cable bipo; L 3 m	8108.131
	Martin (M-version)/Berchtold/ Aesculap	HF connection cable bipo; L 5 m	8108.151
	EMC Dolley	HF connection cable bipo; L 3 m	8108135



HF CONNECTION CABLE BIPO FOR RESECTION IN SALINE SOLUTION

Instrument connector	Device connector		Product no.
WOLF Bipolar resectoscopes	Erbe VIO 300D	Bipolar cable; TUR/TCR; WOLF MF plug; L 4 m	20196-119
	Erbe VIO 3	BIPOLAR CABLE; MF-U MF plug; L 4.5 m	21196-119
		HF connection cable bipo; L 3 m	8108.231
	KLS Martin	HF connection cable bipo; L 5 m	8108.251
		HF connection cable bipo; L 3 m	8108233
	R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo; L 5 m	8108253


WOLF

spirit of excellence

MONO HF NEUTRAL ELECTRODE CABLE

Instrument connector	Device connector		Product no.
2-pole neutral electrode			
CE CONTROL OF THE PROPERTY OF		Mono HF neutral electrode cable, L 4.5 m	2260031
	R. Wolf HF surgical generator 400 kHz 2260001/2260002		



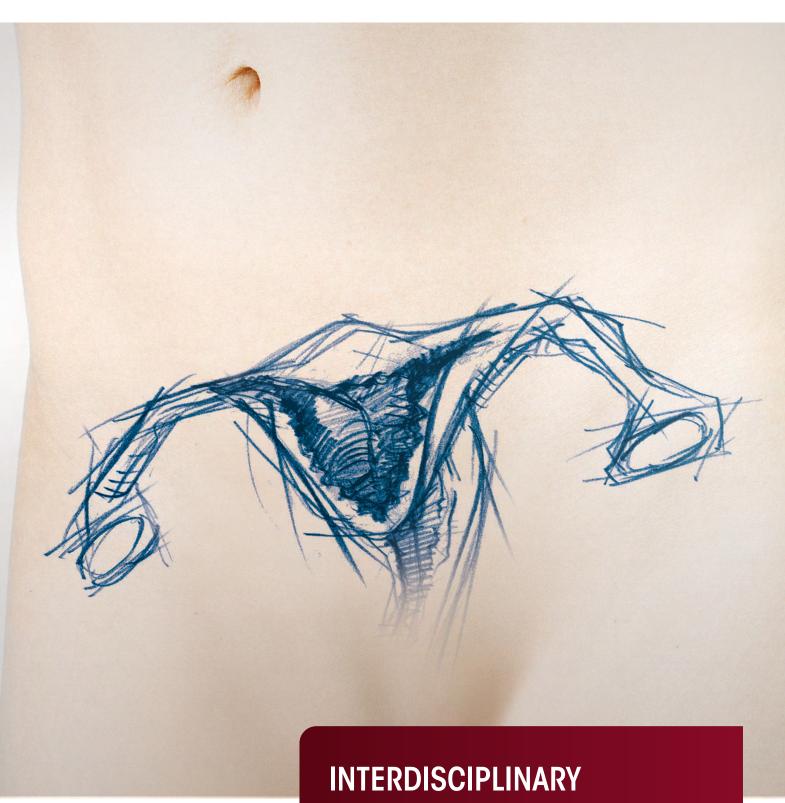

APPLICATIONS

CYSTO-URETHROSCOPY



INTERDISCIPLINARY APPLICATIONS

I

CYSTO-URETHROSCOPE 8650 FOR TELESCOPE 4 MM, 0°, 5°, 30°, 70° (TVT)


ATRAUMATIC COMPACT CYSTO-URETHROSCOPE



CYSTO-URETHROSCOPE 8650



FOR TELESCOPE 4 MM, 0°, 12°, 30°, 70° AND ADAPTERS

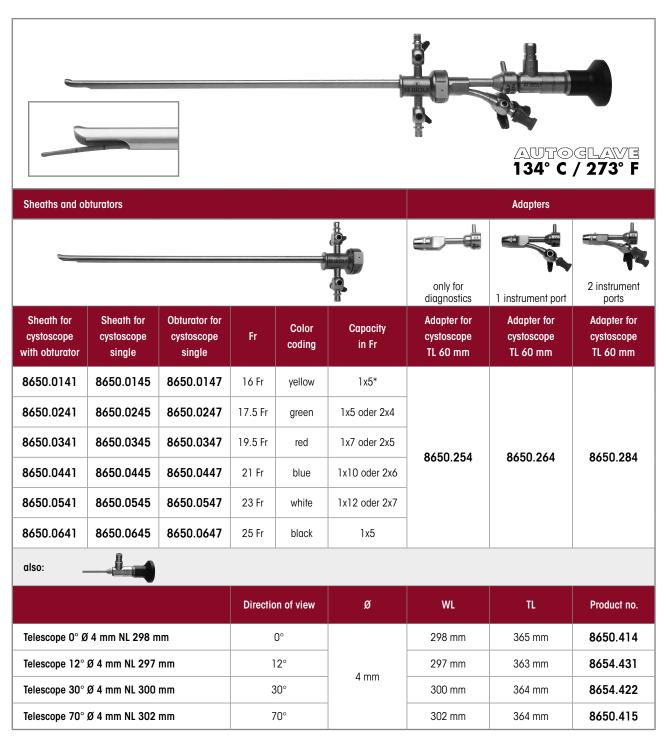

Recommended accessories		Product no.
Perforated basket for standard telescope 2	Internal dimensions (W x H x D): 454 x 52 x 40 mm External dimensions (W x H x D): 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231



1124 Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with year with Richard Wolf GmbH.

CYSTO-URETHROSCOPE 8650




FOR TELESCOPE 4 MM, 30°, 70° AND INSERTS WITH ALBARRAN LEVER



Recommended accessories		Product no.
Perforated basket for standard telescope 2	Internal dimensions (W x H x D): 454 x 52 x 40 mm External dimensions (W x H x D): 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231

ATRAUMATIC COMPACT CYSTO-URETHROSCOPE

14/17 FR, 25° AND ADAPTERS

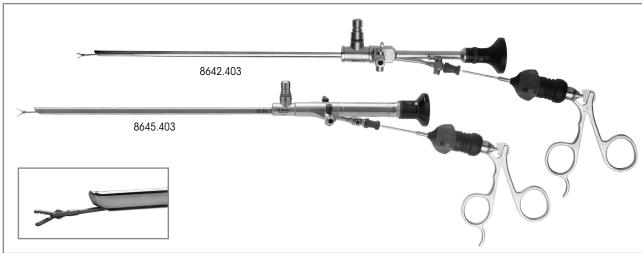

	Viewing	Viewing W. T.			Working channel		
	direction	WL	TL	Sheath	for auxiliary instruments	Form	Product no.
Cystoscope 25°, 14 Fr, WL 218 mm with straight eyepiece, atraumatically shaped tip	25°	218 mm	358 mm	14 Fr	to 5 Fr	oval	8642.403
Cystoscope 25°, 17 Fr, WL 224 mm with straight eyepiece, atraumatically shaped tip	25°	224 mm	364 mm	17 Fr	to 7 Fr	oval	8645.403
also:							
				WL	TL	Fr	Product no.
			075	400	_	000.07	

		WL	TL	Fr	Product no.
	Flex. biopsy forceps 7 Fr WL 375 mm	375 mm	490 mm	7	829.07
9	Flex. biopsy forceps 5 Fr WL 315 mm	315 mm	465 mm	5	829.05
	Flex. grasping forceps 7 Fr WL 365 mm	365 mm	515 mm	7	828.07
	Flex. grasping forceps 5 Fr WL 315 mm	315 mm	465 mm	5	828.05
	Flex. scissors 7 Fr WL 375 mm	375 mm	490 mm	7	830.07
=	Coagulation electrode mono 6 Fr WL 400 mm	400 mm	-	6	823.06
Electrode shape: Button	Coagulation electrode mono 5 Fr WL 400 mm	400 mm	-	5	823.05

Recommended accessories		Product no.
Perforated basket for cysto-urethroscope	Internal dimensions (W x H x D): 435 x 54 x 73 mm External dimensions (W x H x D): 451 x 64 x 80 mm	38013
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231





Managing Directors: Trade register: Mannheim HRB 510031

Jürgen Pfab VAT ID no.: DE144521586

Jürgen Steinbeck Tax no.: 48020/00171

